


www.vishay.com

## Vishay Semiconductors

# **IR Receiver Modules for Remote Control Systems**



## **LINKS TO ADDITIONAL RESOURCES**















### **DESCRIPTION**

The TSOP93... series devices are the latest generation miniaturized IR receiver modules for infrared remote control systems. These series provide improvements in sensitivity to remote control signals in dark ambient as well as in sensitivity in the presence of optical disturbances e.g. from CFLs.

The devices contain a PIN diode and a preamplifier assembled on a lead frame. The epoxy package contains an IR filter. The demodulated output signal can be directly connected to a microprocessor for decoding.

The TSOP936..., series devices are designed to receive long burst codes (10 or more carrier cycles per burst). The third digit designates the AGC level (AGC6) and the last two digits designate the band-pass frequency (see table below). The higher the AGC, the better noise is suppressed, but the lower the code compatibility. AGC6 provides maximized noise suppression. Generally, we advise to select the highest AGC that satisfactorily receives the desired remote code.

These components have not been qualified to automotive specifications.

### **FEATURES**

- · Improved dark sensitivity
- Improved immunity against optical noise
- Very low supply current
- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- Supply voltage: 2.0 V to 3.6 V
- Insensitive to supply voltage ripple and noise
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912





ROHS COMPLIANT HALOGEN FREE GREEN


## **MECHANICAL DATA**

 $1 = OUT, 2 = GND, 3 = V_S$ 


### **ORDERING CODE**

TSOP936.. - 1800 pieces in bags

### **BLOCK DIAGRAM**



### **APPLICATION CIRCUIT**



 $R_1$  and  $C_1$  recommended to reduce supply ripple for  $V_S < 2.2 \text{ V}$ 



PARTS TABLE					
AGC		MAXIMIZED NOISE SUPPRESSION (AGC6)			
	30 kHz	TSOP93630			
	33 kHz	TSOP93633			
Corrier frequency	36 kHz	TSOP93636 (5)(6)			
Carrier frequency	38 kHz	TSOP93638 (3)(4)(11)			
	40 kHz	TSOP93640			
	56 kHz	TSOP93656			
Package		Minimold			
Pinning		1 = OUT, 2 = GND, 3 = V <sub>S</sub>			
Dimensions (mm)		5.4 W x 6.35 H x 4.9 D			
Mounting		Leaded			
Application		Remote control			
Best choice for		(1) Cisco (2) MCIR (3) Mitsubishi (4) NEC (5) Panasonic (6) RC-5 (7) RC-6 (8) RCA (9) r-step (10) Sejin 4PPM (11) Sharp (12) Sony			
Special options		Narrow optical filter: <a href="https://www.vishay.com/doc?81590">www.vishay.com/doc?81590</a> Wide optical filter: <a href="https://www.vishay.com/doc?82726">www.vishay.com/doc?82726</a>			

#### **Notes**

- 30 kHz and 33 kHz only available on written request
- See datasheet for TSOP932.., TSOP934.. for preferred devices for (1)(2)(7)(8)(9)(10)(12)

ABSOLUTE MAXIMUM RATINGS								
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT				
Supply voltage		V <sub>S</sub>	-0.3 to +3.6	V				
Supply current		I <sub>S</sub>	3	mA				
Output voltage		Vo	-0.3 to (V <sub>S</sub> + 0.3)	V				
Output current		I <sub>O</sub>	5	mA				
Junction temperature		Tj	100	°C				
Storage temperature range		T <sub>stg</sub>	-25 to +85	°C				
Operating temperature range		T <sub>amb</sub>	-25 to +85	°C				
Power consumption T <sub>amb</sub> ≤ 85 °C		P <sub>tot</sub>	10	mW				
Soldering temperature $t \le 10 \text{ s}, 1 \text{ mm from}$		T <sub>sd</sub>	260	°C				

### Note

• Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability

<b>ELECTRICAL AND OPTICAL CHARACTERISTICS</b> (T <sub>amb</sub> = 25 °C, unless otherwise specified)							
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT	
Supply ourrent	$E_{V} = 0, V_{S} = 3.3 V$	I <sub>SD</sub>	0.25	0.37	0.45	mA	
Supply current	$E_v = 40$ klx, sunlight	I <sub>SH</sub>	-	0.50	-	mA	
Supply voltage		Vs	2.0	-	3.6	V	
Transmission distance	$E_v = 0$ , test signal see Fig. 1, IR diode TSAL6200, $I_F = 50$ mA	d	-	32	-	m	
Output voltage low	$I_{OSL} = 0.5 \text{ mA}, E_e = 0.7 \text{ mW/m}^2,$ test signal see Fig. 1	V <sub>OSL</sub>	-	-	100	mV	
Minimum irradiance	Test signal: NEC code	E <sub>e min.</sub>	-	0.07	0.15	mW/m <sup>2</sup>	
Maximum irradiance	$t_{pi}$ - 5/f <sub>0</sub> < $t_{po}$ < $t_{pi}$ + 6/f <sub>0</sub> , test signal see Fig. 1	E <sub>e max.</sub>	30	-	-	W/m <sup>2</sup>	
Directivity	Angle of half transmission distance	Ψ1/2	-	± 45	-	0	

## TYPICAL CHARACTERISTICS (T<sub>amb</sub> = 25 °C, unless otherwise specified)




Fig. 1 - Output Delay and Pulse-Width





Fig. 2 - Pulse-Width vs. Irradiance in Dark Ambient






Fig. 4 - Pulse-Width vs. Irradiance in Dark Ambient




Fig. 5 - Frequency Dependence of Responsivity




Fig. 6 - Sensitivity in Bright Ambient






Fig. 7 - Sensitivity vs. Supply Voltage Disturbances




Fig. 8 - Minimum Burst Repetition Time vs. Burst Length




Fig. 9 - Sensitivity vs. Ambient Temperature




Fig. 10 - Relative Spectral Sensitivity vs. Wavelength

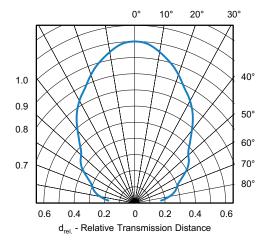


Fig. 11 - Directivity




Fig. 12 - Sensitivity vs. Supply Voltage

## SUITABLE DATA FORMAT

This series is designed to suppress spurious output pulses due to noise or disturbance signals. The devices can distinguish data signals from noise due to differences in frequency, burst length, and envelope duty cycle. The data signal should be close to the device's band-pass center frequency (e.g. 38 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the product in the presence of a disturbance, the sensitivity of the receiver is automatically reduced by the AGC to insure that no spurious pulses are present at the receiver's output. Some examples which are suppressed are:

- DC light (e.g. from tungsten bulbs sunlight)
- · Continuous signals at any frequency
- Strongly or weakly modulated patterns from fluorescent lamps with electronic ballasts (see Fig. 13 or Fig. 14)




Fig. 13 - IR Emission from Fluorescent Lamp With Low Modulation





Fig. 14 - IR Emission from Fluorescent Lamp With High Modulation

	TSOP936			
Minimum burst length	10 cycles/burst			
Minimum gap time between bursts	≥ 13 cycles			
Minimum idle period between data frames	12 ms			
RC-5 code	Preferred			
RC-6 code	Yes			
NEC code	Preferred			
r-step code 56 kHz	Yes			
Sony code	No			
RCA 56 kHz code	Yes			
Mitsubishi code 38 kHz	Preferred			
Suppression of interference from fluorescent lamps	Fig. 13 and Fig. 14			

#### Note

• For data formats with short bursts please see the datasheet for TSOP933.., TSOP935..

## **PACKAGE DIMENSIONS** in millimeters

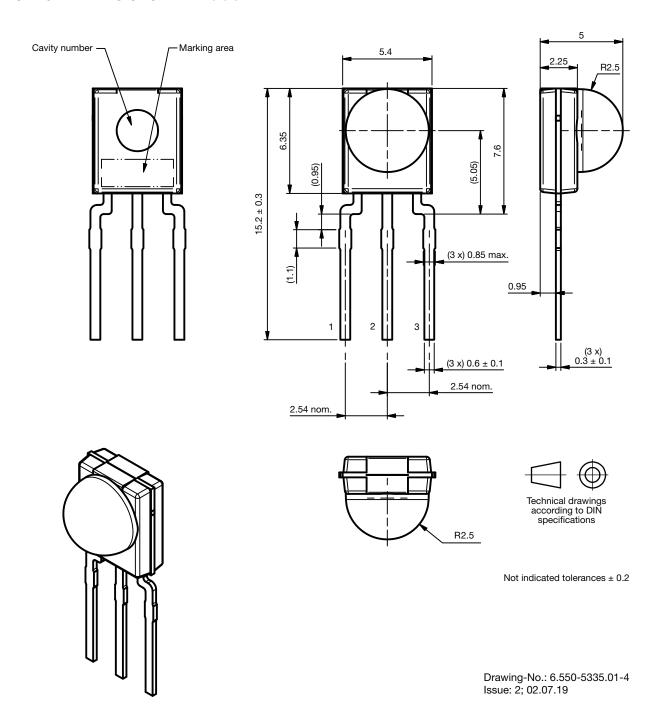



## **BULK PACKAGING**

Standard shipping for minimold is in conductive plastic bags. The packing quantity is determined by weight and the number of components per carton may vary by a maximum of  $\pm$  0.3 %.

## **ORDERING INFORMATION**

Examples: TSOP93638

TSOP93656VI1 TSOP93638SS1F

For more information, see: www.vishay.com/doc?80076

## **PACKAGING QUANTITY**

- 300 pieces per bag (each bag is individually boxed)
- 6 bags per carton

## **Legal Disclaimer Notice**



Vishay

## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.