




Vishay High Power Products

### Hyperfast Rectifier, 8 A FRED Pt®



PRODUCT SUMMARY				
t <sub>rr</sub> (typical)	18 ns			
I <sub>F(AV)</sub>	8 A			
V <sub>R</sub>	600 V			

#### **FEATURES**

- Hyperfast recovery time
- Low forward voltage drop
- · Low leakage current
- 175 °C operating junction temperature
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition
- AEC-Q101 qualified





RoHS\*

HALOGEN FREE

#### **DESCRIPTION/APPLICATIONS**

State of the art hyperfast recovery rectifiers designed with optimized performance of forward voltage drop, hyperfast recovery time, and soft recovery.

The planar structure and the platinum doped life time control guarantee the best overall performance, ruggedness and reliability characteristics.

These devices are intended for use in PFC boost stage in the ac-to-dc section of SMPS, inverters or as freewheeling diodes.

Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS	
Peak repetitive reverse voltage	$V_{RRM}$		600	V	
Average rectified forward current	I <sub>F(AV)</sub>	T <sub>C</sub> = 144 °C	8		
Non-repetitive peak surge current	I <sub>FSM</sub>	T <sub>J</sub> = 25 °C	90	А	
Peak repetitive forward current	I <sub>FM</sub>		16		
Operating junction and storage temperatures	T <sub>J</sub> , T <sub>Stg</sub>		- 65 to 175	°C	

<b>ELECTRICAL SPECIFICATIONS</b> (T <sub>J</sub> = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS	
Breakdown voltage, blocking voltage	V <sub>BR</sub> , V <sub>R</sub>	$I_R = 100 \mu A$	600	1	-		
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 8 A	ı	2.0	2.4	V	
Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 8 A, T <sub>J</sub> = 150 °C	-	1.3	1.8		
Reverse leakage current	I_	$V_R = V_R$ rated	-	0.3	50		
neverse leakage current	I <sub>R</sub>	$T_J = 150 ^{\circ}\text{C},  V_R = V_R  \text{rated}$	-	55	500	μΑ	
Junction capacitance	C <sub>T</sub>	V <sub>R</sub> = 600 V	-	17	ı	pF	
Series inductance	L <sub>S</sub>	Measured lead to lead 5 mm from package body	-	8.0	-	nΗ	

<sup>\*</sup> Pb containing terminations are not RoHS compliant, exemptions may apply

# 8ETH06SPbF, 8ETH06-1PbF

Vishay High Power Products

Hyperfast Rectifier, 8 A FRED Pt®



<b>DYNAMIC RECOVERY CHARACTERISTICS</b> (T <sub>C</sub> = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNITS
Barran		$I_F = 1 \text{ A, } dI_F/dt = 100 \text{ A/}\mu\text{s, } V_R = 30 \text{ V}$		-	18	22	
		t <sub>rr</sub>	-	20	25		
Reverse recovery time	۱ <sub>rr</sub>	T <sub>J</sub> = 25 °C		-	25	-	ns ns
		T <sub>J</sub> = 125 °C	$I_F = 8 \text{ A}$ $dI_F/dt = 200 \text{ A/}\mu\text{s}$ $V_B = 390 \text{ V}$	-	40	-	
Parl manual manual	I <sub>RRM</sub>	T <sub>J</sub> = 25 °C		-	2.4	-	A
Peak recovery current		T <sub>J</sub> = 125 °C		-	4.8	-	
Davieres resolvent charge	0	T <sub>J</sub> = 25 °C		-	25	-	nC
Reverse recovery charge Q <sub>rr</sub>	Q <sub>rr</sub>	T <sub>J</sub> = 125 °C		-	120	-	nc nc
Reverse recovery time	t <sub>rr</sub>	T <sub>J</sub> = 125 °C	I <sub>F</sub> = 8 A dI <sub>F</sub> /dt = 600 A/μs V <sub>R</sub> = 390 V	-	33	-	ns
Peak recovery current	I <sub>RRM</sub>			-	12	-	Α
Reverse recovery charge	Q <sub>rr</sub>			-	220	-	nC

THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Maximum junction and storage temperature range	T <sub>J</sub> , T <sub>Stg</sub>		- 65	-	175	°C
Thermal resistance, junction to case per leg	R <sub>thJC</sub>		-	1.4	2	
Thermal resistance, junction to ambient per leg	R <sub>thJA</sub>	Typical socket mount	-	-	70	°C/W
Thermal resistance, case to heatsink	R <sub>thCS</sub>	Mounting surface, flat, smooth and greased	-	0.5	-	
Weight			-	2.0	-	g
			-	0.07	-	OZ.
Mounting torque			6.0 (5.0)	-	12 (10)	kgf · cm (lbf · in)
Maril to a stantage		Case style D <sup>2</sup> PAK	8ETH06S			
Marking device		Case style TO-262	8ETH06-1			

www.vishay.com



### Hyperfast Rectifier, 8 A FRED Pt®

# Vishay High Power Products




Fig. 1 - Maximum Forward Voltage Drop Characteristics




Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage




Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

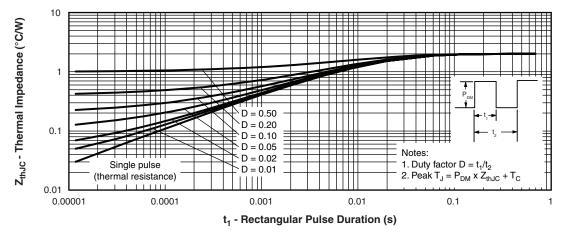


Fig. 4 - Maximum Thermal Impedance Z<sub>thJC</sub> Characteristics

## 8ETH06SPbF, 8ETH06-1PbF

## Vishay High Power Products

### Hyperfast Rectifier, 8 A FRED Pt®






Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current




Fig. 6 - Forward Power Loss Characteristics




Fig. 7 - Typical Reverse Recovery Time vs. dl<sub>F</sub>/dt




Fig. 8 - Typical Stored Charge vs. dl<sub>F</sub>/dt

#### Note

<sup>(1)</sup> Formula used:  $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$ ; Pd = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6); Pd<sub>REV</sub> = Inverse power loss =  $V_{R1} \times I_R$  (1 - D);  $I_R$  at  $V_{R1}$  = Rated  $V_R$ 

Document Number: 94027



### Hyperfast Rectifier, 8 A FRED Pt®

Vishay High Power Products





Fig. 9 - Reverse Recovery Parameter Test Circuit

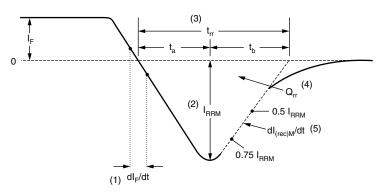

- (1) dI<sub>F</sub>/dt rate of change of current through zero crossing
- (2) I<sub>RRM</sub> peak reverse recovery current
- (3)  $t_{rr}$  reverse recovery time measured from zero crossing point of negative going  $I_F$  to point where a line passing through 0.75  $I_{RRM}$  and 0.50  $I_{RRM}$  extrapolated to zero current.
- (4)  $\mathbf{Q}_{rr}$  area under curve defined by  $\mathbf{t}_{rr}$  and  $\mathbf{I}_{RRM}$

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

(5)  $dI_{(rec)M}/dt$  - peak rate of change of current during  $t_b$  portion of  $t_{rr}$ 

Fig. 10 - Reverse Recovery Waveform and Definitions

## 8ETH06SPbF, 8ETH06-1PbF


Vishay High Power Products

Hyperfast Rectifier, 8 A FRED Pt®



#### **ORDERING INFORMATION TABLE**

#### **Device code**



1 - Current rating (8 A)

2 - E = Single diode

3 - T = TO-220, D<sup>2</sup>PAK

4 - H = Hyperfast rectifier

5 - Voltage rating (06 = 600 V)

6 - • S = D<sup>2</sup>PAK

• -1 = TO-262

7 - • None = Tube (50 pieces)

• TRL = Tape and reel (left oriented, for D<sup>2</sup>PAK package)

• TRR = Tape and reel (right oriented, for D<sup>2</sup>PAK package)

8 - • None = Standard production

• PbF = Lead (Pb)-free

LINKS TO RELATED DOCUMENTS				
Dimensions <u>www.vishay.com/doc?95014</u>				
Part marking information <u>www.vishay.com/doc?95008</u>				
Packaging information	www.vishay.com/doc?95032			

www.vishay.com

For technical questions, contact: diodestech@vishay.com



Vishay

### **Disclaimer**

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Document Number: 91000
Revision: 18-Jul-08
www.vishay.com