



74AUP1G126


SINGLE BUFFER GATE WITH 3-STATE OUTPUT

Description

The Advanced, Ultra Low Power (AUP) CMOS logic family is designed for low power and extended battery life in portable applications.

The 74AUP1G126 is a single, non-inverting, buffer/bus driver, designed for operation over a power supply range of 0.8V to 3.6V. The device has a three-state output that enters a high-impedance state when a LOW-level is applied to the Output Enable (OE) pin. The device is fully specified for partial power down applications using I_{OFF} . The I_{OFF} circuitry disables the output, preventing damaging current backflow when the device is powered down.

Pin Assignments

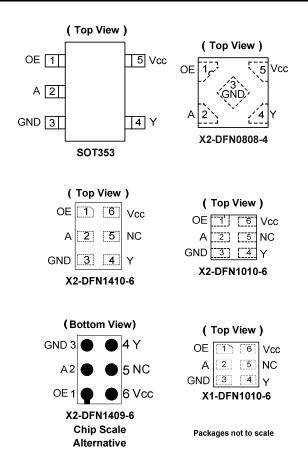

Features

- Advanced Ultra Low Power (AUP) CMOS
- Supply Voltage Range from 0.8V to 3.6V
- ±4mA Output Drive at 3.0V
- Low Static Power Consumption
 - l_{CC} < 0.9μA
- Low Dynamic Power Consumption C_{PD} = 6.3pF (Typical at 3.6V)
- Schmitt Trigger Action at all inputs makes the circuit tolerant for slower input rise and fall time. The hysteresis is typically 250mV at V_{CC} = 3.0V.
- I_{OFF} Supports Partial-Power-Down Mode Operation
- ESD Protection Exceeds JESD 22
 - 2000-V Human Body Model (A114)
 - Exceeds 1000-V Charged Device Model (C101)
- Latch-Up Exceeds 100mA per JESD 78, Class I
- Leadless Packages named per JESD30E
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

Notes: 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.

2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Applications

Suited for Battery and Low Power Needs

Cell Phones, Personal Navigation / GPS

MP3 Players ,Cameras, Video Recorders

Computer Peripherals, Hard Drives, CD/DVD ROMs

PCs, Ultrabooks, Notebooks, Netbooks,


TVs, DVDs, DVRs, Set-Top Boxes

Wide array of products such as:

Tablets, E-readers



Ordering Information

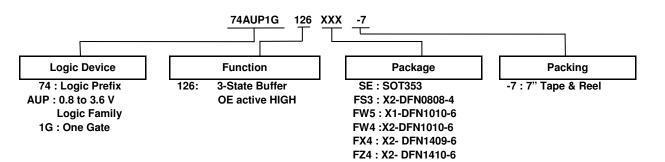

Device	Package	Package	Package	7" Tape	and Reel
Device	Code	(Notes 4 & 5)	Size	Quantity	Part Number Suffix
74AUP1G126SE-7	SE	SOT353	2.0mm x 2.0mm x 1.1mm 0.65 mm lead pitch	3,000/Tape & Reel	-7
74AUP1G126FS3-7	FS3	X2-DFN0808-4	0.8mm x 0.8mm x 0.35mm 0.5 mm pad pitch (diamond)	5,000/Tape & Reel	-7
74AUP1G126FW5-7	FW5	X1-DFN1010-6	1.0mm x 1.0mm x 0.5mm 0.35 mm pad pitch	5,000/Tape & Reel	-7
74AUP1G126FW4-7	FW4	X2-DFN1010-6	1.0mm x 1.0mm x 0.4mm 0.35 mm pad pitch	5,000/Tape & Reel	-7
74AUP1G126FX4-7	FX4	X2-DFN1409-6 Chip Scale Alternative	1.4mm x 0.9mm x 0.4mm 0.5 mm pad pitch	5,000/Tape & Reel	-7
74AUP1G126FZ4-7	FZ4	X2-DFN1410-6	1.4mm x 1.0mm x 0.4mm 0.5 mm pad pitch	5,000/Tape & Reel	-7

Notes: 4. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at


http://www.diodes.com/datasheets/ap02001.pdf.

5. The taping orientation is located on our website at http://www.diodes.com/datasheets/ap02007.pdf.

Pin Descriptions

Pin Name	Function
OE	Output Enable
A	Data Input
GND	Ground
Y	Data Output
Vcc	Supply Voltage

Logic Diagram



Function Table

Inp	Inputs					
OE	Α	Y				
Н	Н	Н				
Н	L	L				
L	Х	Z				



Absolute Maximum Ratings (Notes 6 & 7) (@T_A = +25 °C, unless otherwise specified.)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
V _{CC}	Supply Voltage Range	-0.5 to +4.6	V
VI	Input Voltage Range	-0.5 to +4.6	V
Vo	Voltage Applied to Output in High or Low State	-0.5 to V _{CC} +0.5	V
I _{IK}	Input Clamp Current VI < 0	50	mA
Ι _{ΟΚ}	Output Clamp Current ($V_O < 0$)	50	mA
lo	Continuous Output Current ($V_O = 0$ to V_{CC})	±20	mA
lcc	Continuous Current Through V _{CC}	50	mA
I _{GND}	Continuous Current Through GND	-50	mA
TJ	Operating Junction Temperature	-40 to +150	°C
T _{STG}	Storage Temperature	-65 to +150	°C

Notes: 6. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.

7. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.

Recommended Operating Conditions (Note 8) (@T_A = +25 °C, unless otherwise specified.)

Symbol	Par	ameter	Min	Max	Unit
V _{CC}	Operating Voltage		0.8	3.6	V
VI	Input Voltage		0	3.6	V
Vo	Output Voltage		0	V _{CC}	V
		$V_{CC} = 0.8V$	-	-20	μA
	I _{OH} High-Level Output Current	$V_{CC} = 1.1 V$	—	-1.1	
		$V_{CC} = 1.4V$	—	-1.7	
IOH		V _{CC} = 1.65V	-	-1.9	mA
		V _{CC} = 2.3V	-	-3.1	
		V _{CC} = 3.0V	-	-4	
		$V_{CC} = 0.8V$	—	20	μA
		$V_{CC} = 1.1 V$	-	1.1	
		$V_{CC} = 1.4V$	-	1.7	
IOL	Low-Level Output Current	V _{CC} = 1.65V	—	1.9	mA
		$V_{CC} = 2.3V$	—	3.1	
		$V_{CC} = 3.0V$	—	4	
Δt/ΔV	Input Transition Rise or Fall Rate $V_{CC} = 0.8V$ to 3.6V		—	200	ns/V
T _A	Operating Free-Air Temperature		-40	+125	°C

Note: 8. Unused inputs should be held at V_{CC} or Ground.



Electrical Characteristics (@T_A = +25 °C, unless otherwise specified.)

Symbol	Parameter	Test Conditions	N	T _A = +	·25 ℃	T _A = -40 °C	Cto+85℃	Unit	
Symbol	Parameter	Test Conditions	Vcc	Min	Max	Min	Max		
		_	0.8V to 1.65V	0.80 x V _{CC}	—	0.80 x V _{CC}	_		
VIH	High-Level Input	_	1.65V to 1.95V	0.65 x V _{CC}	—	0.65 x V _{CC}	_	v	
VIH	Voltage		2.3V to 2.7V	1.6	—	1.6	_	v	
		_	3.0V to 3.6V	2.0	—	2.0	_		
		—	0.8V to 1.65V	—	$0.30 \times V_{CC}$	—	$0.30 \times V_{CC}$		
VIL	Low-Level Input		1.65V to 1.95V	—	$0.35 \times V_{CC}$	—	$0.35 \times V_{CC}$	v	
VIL	Voltage	_	2.3V to 2.7V	—	0.7	_	0.7	v	
			3.0V to 3.6V	—	0.9	—	0.9		
		I _{OH} = -20μA	0.8V to 3.6V	$V_{CC} - 0.1$	—	$V_{CC} - 0.1$	_		
		I _{OH} = -1.1mA	1.1V	$0.75 \times V_{CC}$	—	$0.7 \times V_{CC}$	_		
		I _{OH} = -1.7mA	1.4V	1.11	—	1.03	_		
	High-Level Output	I _{OH} = -1.9mA	1.65V	1.32	—	1.3	_	v	
V _{OH}	Voltage	I _{OH} = -2.3mA	0.01/	2.05	—	1.97		V	
		I _{OH} = -3.1mA	2.3V	1.9	—	1.85			
		I _{OH} = -2.7mA	<u>a) (</u>	2.72	_	2.67	_		
		I _{OH} = -4mA	3V	2.6	_	2.55	_		
		I _{OL} = 20μΑ	0.8V to 3.6V	_	0.1	_	0.1		
		$I_{OL} = 1.1 \text{mA}$	1.1V	_	0.3 x V _{CC}	_	0.3 x V _{CC}	V	
		I _{OL} = 1.7mA	1.4V	_	0.31	_	0.37		
	Low-Level Output	I _{OL} = 1.9mA	1.65V	_	0.31	_	0.35		
Vol	Voltage	I _{OL} = 2.3mA		_	0.31	_	0.33		
		I _{OL} = 3.1mA	2.3V	_	0.44	_	0.45		
		$I_{OL} = 2.7 \text{mA}$		_	0.31	_	0.33		
		$I_{OL} = 4mA$	3V	_	0.44	_	0.45		
h	Input Current	A or B Input $V_1 = GND$ to 3.6V	0 to 3.6V	_	±0.1	_	±0.5	μA	
IOFF	Power Down Leakage Current	$V_{\rm I}$ or $V_{\rm O} = 0$ V to 3.6V	0	—	±0.2	—	±0.5	μA	
loz	Z State Leakage Current	V _O = 3.6V V _i = 3.6V	3.6V	—	±0.2	—	±0.5	μA	
ΔI_{OFF}	Delta Power Down Leakage Current	$V_{\rm I}$ or $V_{\rm O} = 0$ V to 3.6V	0 to 0.2V	_	0.2	—	0.6	μA	
Icc	Supply Current	$V_{I} = GND \text{ or } V_{CC}, I_{O} = 0$	0.8V to 3.6V	—	0.5	_	0.9	μA	
		Data Input at V_{CC} -0.6V OE = GND I _O = 0A	3.3V	—	40	—	50	μA	
ΔI _{CC}	Additional Supply	OE Input at V_{CC} -0.6V Data Input = GND or Vcc, I _O = 0A	3.3V	—	110	—	120	μA	
		OE Input at GND Data Input = GND to 3.6V, I _O = 0A	0.8V to 3.6V	_	1	_	1	μA	



Electrical Characteristics (continued) (@T_A = +25 °C, unless otherwise specified.)

Symbol	Parameter	Test Conditions	M	T _A = -40 °C	to +125℃	Unit
Symbol	Farameter	Test Conditions	V _{cc}	Min	Max	Onit
		_	0.8V to 1.65V	$0.80 \times V_{CC}$	—	
VIH	High-Level Input	—	1.65V to 1.95V	0.70 x V _{CC}	—	V
VIH	Voltage		2.3V to 2.7V	1.6	—	v
		_	3.0V to 3.6V	2.0	—	
		—	0.8V to 1.65V	_	$0.25 \times V_{CC}$	
VIL	Low-Level Input		1.65V to 1.95V	_	0.35 x V _{CC}	V
VIL	Voltage	_	2.3V to 2.7V	—	0.7	v
			3.0V to 3.6V	_	0.9	
		I _{OH} = -20μA	0.8V to 3.6V	$V_{CC} - 0.11$	—	
		I _{OH} = -1.1mA	1.1V	$0.6 \times V_{CC}$	—	
		I _{OH} = -1.7mA	1.4V	0.93	_	
N/	High-Level Output	I _{OH} = -1.9mA	1.65V	1.17	—	14
V _{OH}	Voltage	I _{OH} = -2.3mA	0.01/	1.77	—	V
		I _{OH} = -3.1mA	2.3V	1.67	—	
		I _{OH} = -2.7mA	e) /	2.40	—	
		I _{OH} = -4mA	3V	2.30	—	
		I _{OL} = 20μΑ	0.8V to 3.6V	_	0.11	
		$I_{OL} = 1.1 \text{mA}$	1.1V	_	0.3 x V _{CC}	
		I _{OL} = 1.7mA	1.4V	_	0.41	
	Low-Level Output	I _{OL} = 1.9mA	1.65V	_	0.39	
Vol	Voltage	I _{OL} = 2.3mA		_	0.36	V
		$I_{OL} = 3.1 \text{mA}$	2.3V	_	0.50	
		$I_{OL} = 2.7 \text{mA}$		_	0.36	
		$I_{OL} = 4mA$	3V	_	0.50	
lı	Input Current	A or B Input $V_1 = GND$ to 3.6V	0 to 3.6V		±0.75	μA
IOFF	Power Down Leakage Current	$V_1 \text{ or } V_0 = 0V \text{ to } 3.6V$	0		±3.5	μA
I _{OZ}	Z State Leakage Current	V _O = 3.6V V _i = 3.6V	3.6V	_	±1.5	μΑ
Δl _{OFF}	Delta Power Down Leakage Current	$V_1 \text{ or } V_0 = 0 \text{V to } 3.6 \text{V}$	0V to 0.2V	_	±2.5	μA
Icc	Supply Current	$V_I = GND \text{ or } V_{CC}, I_O = 0$	0.8V to 3.6V	—	3.0	μA
		Data Input at V_{CC} -0.6V OE = GND I _O = 0A	3.3V		75	μΑ
ΔI_{CC}	Additional Supply Current	OE input at V_{CC} -0.6V Data Input = GND or Vcc, $I_O = 0A$	3.3V	_	180	μA
		OE Input at GND Data Input = GND to 3.6V, I _O = 0A	0.8V to 3.6V		1	μA



Switching Characteristics

Parameter	From	То	Vee	Т	A = +25°	С	T _A = -40 °C	C to +85℃	T _A = -40 °C	to +125℃	Unit
Farameter	Input	Output	Vcc	Min	Тур	Max	Min	Max	Min	Max	Unit
			0.8V	_	20.6	—	_	—	—	_	
			1.2V ± 0.1V	2.5	5.5	10.5	2.5	11.7	2.5	12.9	
	А	Y	1.5V ± 0.1V	2.0	3.9	6.1	2.0	7.3	2.0	8.1	
t _{pd}	A	Y	1.8V ± 0.15V	1.9	3.2	4.8	1.7	6.1	1.7	6.7	ns
			2.5V ± 0.2V	1.6	2.6	3.6	1.4	4.3	1.4	4.9	
			3.3V ± 0.3V	1.4	2.4	3.1	1.2	3.9	1.2	4.4	
		Y	0.8V		71.6	—	—	—	—		- ns
			1.2V ± 0.1V	2.8	6.2	12.4	2.6	13.6	2.6	13.6	
	OE		1.5V ± 0.1V	2.1	4.2	6.9	2.1	7.4	2.1	7.7	
t _{en}	UE		1.8V ± 0.15V	1.7	3.3	5.3	1.7	5.9	1.7	6.2	
			2.5V ± 0.2V	1.4	2.4	3.6	1.4	3.8	1.4	4.1	
			3.3V ± 0.3V	1.3	2.0	2.9	1.2	3.2	1.2	3.4	
			0.8V		10.3	—	—	—	—		
			1.2V ± 0.1V	2.6	4.2	8.2	2.6	8.9	2.6	8.9	
	OE	Y	1.5V ± 0.1V	2.1	3.2	6.7	2.1	7.0	2.1	7.0	ns
t _{dis}	UE	T	1.8V ± 0.15V	1.7	3.1	6.2	1.7	6.5	1.7	6.5	
			2.5V ± 0.2V	1.3	2.9	5.7	1.3	5.8	1.3	5.8	
			3.3V ± 0.3V	1.2	2.8	4.5	1.2	4.7	1.2	4.7	

$C_L = 10 pF$, See Figure 1

Devenueter	From	То	N.	Т	A = +25 °	С	T _A = -40 °C	C to +85℃	T _A = -40 ℃ to +125 ℃		Unit
Parameter	Input	Output	V _{cc}	Min	Тур	Max	Min	Max	Min	Max	Unit
			0.8V	—	24.0	_	_	—	—	—	
			1.2V ± 0.1V	2.6	6.4	12.3	2.6	13.8	2.6	15.2	
	А	Y	1.5V ± 0.1V	2.1	4.5	7.3	2.1	8.5	2.1	9.4	
t _{pd}	A	Y	1.8V ± 0.15V	1.9	3.8	5.5	1.9	6.8	1.9	7.6	ns
			2.5V ± 0.2V	1.7	3.2	4.2	1.7	5.3	1.7	5.9	
			3.3V ± 0.3V	1.6	3.0	3.8	1.6	4.6	1.6	5.2	
			0.8V	—	75.3	_	—	—	—	—	ns
		Y	1.2V ± 0.1V	3.0	7.1	14.1	3.0	15.4	3.0	15.4	
	OE		1.5V ± 0.1V	2.1	4.8	8.0	2.1	8.3	2.1	8.6	
t _{en}	UE		1.8V ± 0.15V	1.7	3.9	5.9	1.7	6.5	1.7	6.8	
			2.5V ± 0.2V	1.4	2.9	4.2	1.4	4.5	1.4	4.8	
			3.3V ± 0.3V	1.3	2.6	3.6	1.3	3.8	1.3	4.0	
			0.8V	—	12.2	_	—	—	—	—	
			1.2V ± 0.1V	3.3	7.9	10.1	3.3	11.1	3.3	11.1	
+	OE	Y	1.5V ± 0.1V	2.1	7.0	9.3	2.1	10.1	2.1	10.1	
t _{dis} OE	UE	Ŷ	1.8V ± 0.15V	1.7	6.3	8.7	1.7	9.1	1.7	9.1	ns
			2.5V ± 0.2V	1.4	4.9	7.6	1.4	7.8	1.4	7.8	
			3.3V ± 0.3V	1.3	4.1	5.7	1.3	5.8	1.3	5.8	



Switching Characteristics (continued)

Devenenter	From	То	V	Т	A = +25°	C	T _A = -40 °C	C to +85℃	T _A = -40 °C	to +125℃	Lini
Parameter	Input	Output	V _{cc}	Min	Тур	Max	Min	Max	Min	Max	Uni
			0.8V	_	27.4	—	_	—	—	—	
			1.2V ± 0.1V	3.6	7.2	14.1	3.3	15.8	3.3	17.5	
	٨	Y	1.5V ± 0.1V	3.0	5.1	8.1	2.5	9.8	2.5	10.9	
t _{pd}	A	Ŷ	1.8V ± 0.15V	2.2	4.3	6.3	2.0	7.9	2.0	8.8	ns
			2.5V ± 0.2V	2.0	3.7	4.9	1.8	6.0	1.8	6.7	
			3.3V ± 0.3V	2.0	3.5	4.4	1.8	5.4	1.8	6.1	
		Y	0.8V	_	79.2	—	_	—	—		
			1.2V ± 0.1V	3.6	7.8	15.8	3.3	17.1	3.3	17.1	ns
	05		1.5V ± 0.1V	3.0	5.4	8.8	2.9	9.4	2.9	9.7	
t _{en}	OE		1.8V ± 0.15V	2.1	4.3	6.7	2.0	7.3	2.0	7.7	
			2.5V ± 0.2V	1.8	3.4	4.8	1.7	5.2	1.7	5.6	
			3.3V ± 0.3V	1.6	3.1	4.3	1.5	4.5	1.5	4.7	
			0.8V	_	14.9	—	_	—	—	—	
			1.2V ± 0.1V	3.7	9.0	12.7	3.7	13.0	3.7	13.0	
	05	Y	1.5V ± 0.1V	2.5	8.1	11.5	2.5	12.0	2.5	12.0	
t _{dis}	OE	Y	1.8V ± 0.15V	2.0	7.9	10.1	2.0	10.4	2.0	10.4	ns
			2.5V ± 0.2V	1.7	7.7	9.7	1.7	9.9	1.7	9.9	
			3.3V ± 0.3V	1.5	7.2	9.0	1.5	9.3	1.5	9.3	

C_L=30pF, See Figure 1

Devenueter	From	То	V	Т	_A = +25°	С	T _A = -40 °C	C to +85℃	T _A = -40 °C	to +125℃	L Incia
Parameter	Input	Output	Vcc	Min	Тур	Max	Min	Max	Min	Max	Unit
			0.8V	_	37.4	—	_	_	—	—	
			1.2V ± 0.1V	4.8	9.5	18.7	4.4	21.4	4.4	24.0	
	А	Y	1.5V ± 0.1V	4.0	6.7	10.8	3.0	13.0	3.0	14.5	
t _{pd}	A	ř	1.8V ± 0.15V	2.5	5.6	8.4	2.5	10.3	2.5	11.5	ns
			2.5V ± 0.2V	2.2	4.8	6.3	2.2	7.8	2.2	8.7	
			3.3V ± 0.3V	2.0	4.6	5.8	2.0	7.0	2.0	8.3	
		0.8V	_	90.6	—	_	—	—	—		
		Y	1.2V ± 0.1V	4.7	10.0	20.4	4.3	22.0	4.3	22.0	- ns
	OE		1.5V ± 0.1V	3.5	6.9	11.3	3.5	12.0	3.5	12.5	
t _{en}	UE		1.8V ± 0.15V	2.6	5.6	8.6	3.2	9.5	3.2	10.1	
			2.5V ± 0.2V	2.3	4.5	6.3	2.9	6.8	2.9	7.3	
			3.3V ± 0.3V	2.2	4.2	5.8	2.7	6.4	2.7	6.7	
			0.8V	_	51.6	—	_	—	—	—	
			1.2V ± 0.1V	4.7	12.8	15.0	4.7	15.5	4.7	15.5	
	OF	Y	1.5V ± 0.1V	3.0	11.8	13.5	3.0	13.9	3.0	13.9	20
t _{dis} OE	UE	OE Y	1.8V ± 0.15V	2.6	10.8	12.7	2.6	13.2	2.6	12.7	ns
			2.5V ± 0.2V	2.3	10.1	12.0	2.3	12.5	2.3	12.5	
			3.3V ± 0.3V	2.2	9.0	11.5	2.2	12.0	2.2	12.0	




Operating and Package Characteristics (@T_A = +25 °C, unless otherwise specified.)

	Parameter	Test Conditio	ons	Vcc	Тур	Unit
				0.8V	6.9	
				1.2V ± 0.1V	6.7	
~	Power Dissipation	f = 1MH	lz	1.5V ± 0.1V	6.6	~ [
C _{pd}	Capacitance	No Loa	d	1.8V ± 0.15V	6.5	pF
				2.5V ± 0.2V	6.4	
				3.3V ± 0.3V	6.3	
Ci	Input Capacitance	V _i = V _{CC} or GND		0V or 3.3V	1.5	pF
		SOT353		—	371	
		X2-DFN0808-4		_	430	
0	Thermal Resistance	X1-DFN1010-6		_	435	°C/W
θ_{JA}	Junction-to-Ambient	X2-DFN1010-6	(Note 9)	—	445	-0/00
		X2-DFN1409-6		_	470	
		X2-DFN1410-6		_	460	
		SOT353		—	143	
		X2-DFN0808-4		_	240	
0	θ _{JC} Thermal Resistance Junction-to-Case	X1-DFN1010-6		_	250	
AlC		X2-DFN1010-6	(Note 9)	—	250	•C/W
		X2-DFN1409-6	1	—	275	1
		X2-DFN1410-6	1	—	265	1

Note: 9. Test condition for each of the six package types: Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.




Parameter Measurement Information




TEST	S1	RL
tplh/tphl	Open	1MΩ
t _{PLZ} /t _{PZL}	Vload	5kΩ
tphz/tpzh	GND	5kΩ


N _e .	In	puts	N	V	0	V۵
Vcc	VI	t _r /t _f	VM	VLOAD	C∟	
0.8V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.1V
1.2V ± 0.1V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.1V
1.5V ± 0.1V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.1V
1.8V ± 0.15V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.15V
2.5V ± 0.2V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.15V
3.3V ± 0.3V	V _{CC}	≤3ns	V _{CC} /2	2 X V _{CC}	5, 10, 15, 30pF	0.3V



Voltage Waveform Pulse Duration











Figure 1 Load Circuit and Voltage Waveforms

- Notes: A. Includes test lead and test apparatus capacitance.
 - B. All pulses are supplied at pulse repetition rate \leq 10MHz.
 - C. Inputs are measured separately one transition per measurement.
 - D. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
 - E. t_{PZL} and t_{PZH} are the same as t_{EN} .
 - F. tPLH and tPHL are the same as tPD.




Marking Information

(1) SOT353

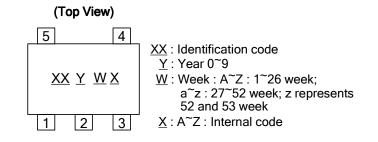

Part Number	Package	Identification Code
74AUP1G126SE-7	SOT353	XZ


(2) X2-DFN0808-4, X2-DFN1010-6 X2-DFN1409-6 and X2-DFN1410-6




Part Number	Package	Identification Code
74AUP1G126FS3-7	X2-DFN0808-4	ΥZ
74AUP1G126FW5-7	X1-DFN1010-6	QY
74AUP1G126FW4-7	X2-DFN1010-6	XZ
74AUP1G126FX4-7	X2-DFN1409-6	HR
74AUP1G126FZ4-7	X2-DFN1410-6	XZ



SOT353 Package Outline Dimensions and Suggested Pad Layout




	SOT353				
Dim	Min	Max	Тур		
Α	0.10	0.30	0.25		
В	1.15	1.35	1.30		
С	2.00	2.20	2.10		
D	0.65 Typ				
F	0.40	0.45	0.425		
Н	1.80	2.20	2.15		
J	0	0.10	0.05		
К	0.90	1.00	1.00		
L	0.25	0.40	0.30		
Μ	0.10	0.22	0.11		
α	0°	8°	-		
A	All Dimensions in mm				




Dimensions	Value (in mm)
Z	2.5
G	1.3
Х	0.42
Y	0.6
C1	1.9
C2	0.65



X2-DFN0808-4 Package Outline Dimensions and Suggested Pad Layout




	X2-DFN0808-4				
Dim	Min	Max	Тур		
Α	0.25	0.35	0.30		
A1	0	0.04	0.02		
A3	-	-	0.13		
b	0.17	0.27	0.22		
D	0.75	0.85	0.80		
D2	0.15	0.35	0.25		
E	0.75	0.85	0.80		
E2	0.15	0.35	0.25		
е	-	-	0.48		
k	0.20	-	-		
L	0.17	0.27	0.22		
L1	0.02	0.12	0.07		
z	-	-	0.05		
A	All Dimensions in mm				




Dimensions	Value
С	0.480
Х	0.320
X1	0.300
X2	0.106
X3	0.800
Y	0.320
Y1	0.300
Y2	0.106
Y3	0.900



X1-DFN1010-6 (Type B) Package Outline Dimensions and Suggested Pad Layout




	X1-DFN1010-6 (Type B)				
Dim	Min	Max	Тур		
Α	-	0.50	0.39		
A1	-	0.04	-		
b	0.12	0.20	0.15		
D	0.95	1.050	1.00		
Е	0.95	1.050	1.00		
е	0.35 BSC				
e1	0.55 BSC				
L3	0.27	0.30	0.30		
L3a	0.32	0.40	0.35		
All	All Dimensions in mm				




Dimensions	Value
Dimensions	(in mm)
С	0.350
G	0.150
G1	0.150
Х	0.200
X1	0.900
Y	0.500
Y1	0.525
Y2	0.475
Y3	1.150




X2-DFN1010-6 Package Outline Dimensions and Suggested Pad Layout






)	X2-DFN1010-6				
Dim	Min	Max	Тур		
Α		0.40	0.39		
A1	0.00	0.05	0.02		
A3			0.13		
b	0.14	0.20	0.17		
b1	0.05	0.15	0.10		
D	0.95	1.05	1.00		
E	0.95	1.05	1.00		
е			0.35		
L	0.35	0.45	0.40		
К	0.15				
Z	_		0.065		
All D	All Dimensions in mm				




Dimensions	Value (in mm)
С	0.350
G	0.150
Х	0.200
X1	0.900
Y	0.550
Y1	1.250



X2-DFN1409-6 Package Outline Dimensions and Suggested Pad Layout




X2-DFN1409-6				
Dim	Min	Max	Тур	
Α	-	0.40	0.39	
A1	0	0.05	0.02	
A3	-	-	0.13	
Ø	0.20	0.30	0.25	
D	1.35	1.45	1.40	
ш	0.85	0.95	0.90	
e1	-	-	0.50	
e2	-	-	0.50	
Z1	-	-	0.075	
Z2	-	-	0.075	
All Dimensions in mm				




Dimensions	Value (in mm)	
С	1.000	
C1	0.500	
D	0.300	
G	0.200	
G1	0.200	
Х	0.400	
Y	0.150	



X2-DFN1410-6 Package Outline Dimensions and Suggested Pad Layout



X2-DFN1410-6				
Dim	Min	Max	Тур	
Α		0.40	0.39	
A1	0.00	0.05	0.02	
A3			0.13	
b	0.15	0.25	0.20	
D	1.35	1.45	1.40	
Е	0.95	1.05	1.00	
е			0.50	
L	0.25	0.35	0.30	
Z		_	0.10	
Z1	0.045	0.105	0.075	
All Dimensions in mm				



Dimensions	Value (in mm)	
С	0.500	
G	0.250	
Х	0.250	
X1	1.250	
Y	0.525	
Y1	1.250	



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systemsrelated information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2015, Diodes Incorporated

www.diodes.com