



# Features


- Logic Level Input
- Input Protection (ESD)
- Thermal shutdown with auto restart
- Green product (RoHS compliant)
- Overload protection
- Short circuit protection
- Overvoltage protection
- Current limitation
- Analog driving possible

# Application

- All kinds of resistive, inductive and capacitive loads in switching or linear applications
- µC compatible power switch for 12 V DC applications
- Replaces electromechanical relays and discrete circuits

# **General Description**

N channel vertical power FET in Smart SIPMOS<sup>®</sup> technology. Fully protected by embedded protection functions.

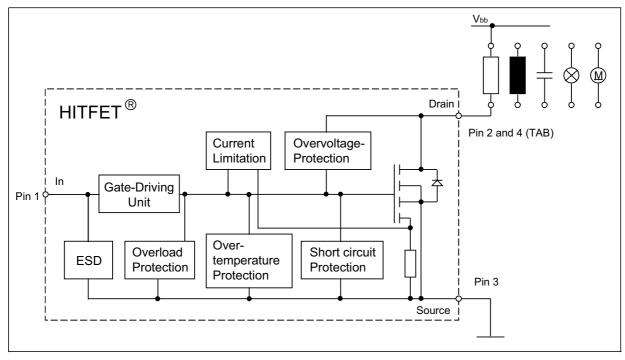


Complete product spectrum and additional information http://www.infineon.com/hitfet

Datasheet

# Product Summary

Drain source voltage	V <sub>DS</sub>	42	V
On-state resistance	R <sub>DS(on)</sub>	50	mΩ
Nominal load current	I <sub>D(Nom)</sub>	3.5	А
Clamping energy	E <sub>AS</sub>	3	J





Parameter	Symbol	Value	Unit
Drain source voltage	V <sub>DS</sub>	42	V
Supply voltage for full short circuit protection	V <sub>bb(SC)</sub>	42	
Continuous input voltage <sup>1)</sup>	V <sub>IN</sub>	-0.2 <sup>2)</sup> +10	
Continuous input current <sup>2)</sup>	/ <sub>IN</sub>		mA
$-0.2V \le V_{\rm IN} \le 10V$		self limited	
$V_{\rm IN}$ < -0.2V or $V_{\rm IN}$ > 10V		<i>I</i> <sub>IN</sub>   ≤ 2	
Operating temperature	T <sub>j</sub>	-40+150	°C
Storage temperature	T <sub>stg</sub>	-55 +150	
Power dissipation <sup>5)</sup>	P <sub>tot</sub>		W
<i>T</i> <sub>C</sub> = 85 °C		43	
6cm <sup>2</sup> cooling area , <i>T</i> <sub>A</sub> = 85 °C		1.1	
Unclamped single pulse inductive energy <sup>2)</sup>	E <sub>AS</sub>	3	J
Load dump protection $V_{\text{LoadDump}}^{2(3)} = V_{\text{A}} + V_{\text{S}}$	V <sub>LD</sub>	65	V
$V_{\rm IN}$ = 0 and 10 V, t <sub>d</sub> = 400 ms, $R_{\rm I}$ = 2 $\Omega$ ,			
<i>R</i> <sub>L</sub> = 4.5 Ω, <i>V</i> <sub>A</sub> = 13.5 V			
Electrostatic discharge voltage <sup>2</sup> ) (Human Body Model)	V <sub>ESD</sub>	2	kV
according to Jedec norm			
EIA/JESD22-A114-B, Section 4			

### Maximum Ratings at T<sub>i</sub> = 25°C, unless otherwise specified

#### **Thermal resistance**

junction - case:	R <sub>thJC</sub>	1.5	K/W
SMD: junction - ambient	R <sub>thJA</sub>		
@ min. footprint		115	
@ 6 cm <sup>2</sup> cooling area <sup>4)</sup>		55	

<sup>1</sup>For input voltages beyond these limits I<sub>IN</sub> has to be limited.

<sup>2</sup>not subject to production test, specified by design

 $^{3}V_{\text{Loaddump}}$  is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839

<sup>4</sup> Device on 50mm\*50mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70µm thick) copper area for drain connection. PCB mounted vertical without blown air.

 $^{5}$ not subject to production test, calculated by  $R_{thJA}$  and  $R_{ds(on)}$ 



#### **Electrical Characteristics**

Parameter	Symbol		Values		
_at $T_{i} = 25^{\circ}$ C, unless otherwise specified		min.	typ.	max.	
Characteristics					
Drain source clamp voltage	V <sub>DS(AZ)</sub>	42	-	55	V
<i>T</i> <sub>j</sub> = - 40+ 150, <i>I</i> <sub>D</sub> = 10 mA					
Off-state drain current	I <sub>DSS</sub>				μA
$T_{\rm j}$ = -40+85 °C, $V_{\rm DS}$ = 32 V , $V_{\rm IN}$ = 0 V		-	1.5	8	
<i>T</i> <sub>j</sub> = 150 °C		-	5	15	
Input threshold voltage	V <sub>IN(th)</sub>				V
<i>I</i> <sub>D</sub> = 1.4 mA, <i>T</i> <sub>j</sub> = 25 °C		1.3	1.7	2.2	
<i>I</i> <sub>D</sub> = 1.4 mA, <i>T</i> <sub>j</sub> = 150 °C		0.8	-	-	
On state input current	I <sub>IN(on)</sub>	-	10	30	μA
On-state resistance	R <sub>DS(on)</sub>				mΩ
$V_{IN} = 5 \text{ V}, I_D = 3 \text{ A}, T_j = 25 \text{ °C}$		-	45	60	
$V_{\rm IN}$ = 5 V, $I_{\rm D}$ = 3 A, $T_{\rm j}$ = 150 °C		-	75	100	
On-state resistance	R <sub>DS(on)</sub>				
V <sub>IN</sub> = 10 V, <i>I</i> <sub>D</sub> = 3 A, <i>T</i> <sub>j</sub> = 25 °C		-	35	50	
$V_{\rm IN}$ = 10 V, $I_{\rm D}$ = 3 A, $T_{\rm j}$ = 150 °C		-	65	90	
Nominal load current <sup>5)</sup>	I <sub>D(Nom)</sub>	3.5	4.6	-	А
$T_{\rm j}$ < 150°C, $V_{\rm IN}$ = 10 V, $T_{\rm A}$ = 85 °C, SMD <sup>1</sup> )					
Nominal load current <sup>5)</sup>	I <sub>D(ISO)</sub>	7.1	10	-	
$V_{\rm IN}$ = 10 V, $V_{\rm DS}$ = 0.5 V, $T_{\rm C}$ = 85 °C, $T_{\rm j}$ < 150°C					
Current limit (active if V <sub>DS</sub> >2.5 V) <sup>2)</sup>	I <sub>D(lim)</sub>	18	24	30	
$V_{\rm IN}$ = 10 V, $V_{\rm DS}$ = 12 V, $t_{\rm m}$ = 200 µs					

<sup>1</sup>@ 6 cm<sup>2</sup> cooling area

<sup>2</sup>Device switched on into existing short circuit (see diagram Determination of  $b_{(lim)}$ ). If the device is in on condit and a short circuit occurs, these values might be exceeded for max. 50 µs.

 $^{5}\text{not}$  subject to production test, calculated by  $\text{R}_{thJA}$  and  $\text{R}_{ds(on)}$ 



#### **Electrical Characteristics**

Parameter	Symbol	ymbol Values			Unit
at $T_{i} = 25^{\circ}$ C, unless otherwise specified		min.	typ.	max.	

#### **Dynamic Characteristics**

Turn-on time $V_{\rm IN}$ to 90% $I_{\rm D}$ :	t <sub>on</sub>	-	60	100	μs
$R_{\rm L}$ = 4.7 $\Omega$ , $V_{\rm IN}$ = 0 to 10 V, $V_{\rm bb}$ = 12 V					
Turn-off time $V_{\rm IN}$ to 10% $I_{\rm D}$ :	t <sub>off</sub>	-	60	100	
$R_{\rm L}$ = 4.7 Ω, $V_{\rm IN}$ = 10 to 0 V, $V_{\rm bb}$ = 12 V					
Slew rate on 70 to 50% V <sub>bb</sub> :	-dV <sub>DS</sub> /dt <sub>on</sub>	-	0.3	1.5	V/µs
$R_{\rm L}$ = 4.7 $\Omega$ , $V_{\rm IN}$ = 0 to 10 V, $V_{\rm bb}$ = 12 V					
Slew rate off 50 to 70% V <sub>bb</sub> :	dV <sub>DS</sub> /dt <sub>off</sub>	-	0.7	1.5	
$R_{\rm L}$ = 4.7 $\Omega$ , $V_{\rm IN}$ = 10 to 0 V, $V_{\rm bb}$ = 12 V					

# **Protection Functions**<sup>1)</sup>

Thermal overload trip temperature	T <sub>jt</sub>	150	175	-	°C
Thermal hysteresis <sup>2)</sup>	$\Delta T_{jt}$	-	10	-	К
Input current protection mode	I <sub>IN(Prot)</sub>	-	130	300	μA
<i>T</i> <sub>j</sub> = 150 °C					
Unclamped single pulse inductive energy <sup>2)</sup>	E <sub>AS</sub>	3	-	-	J
$I_{\rm D}$ = 3 A, $T_{\rm j}$ = 25 °C, $V_{\rm bb}$ = 12 V					

## **Inverse Diode**

Inverse diode forward voltage	V <sub>SD</sub>	-	1.0	1.5	V
<i>I</i> <sub>F</sub> = 15 A, <i>t</i> <sub>m</sub> = 250 μs, <i>V</i> <sub>IN</sub> = 0 V,					
<i>t</i> <sub>P</sub> = 300 μs					


<sup>1</sup>Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation

<sup>2</sup>not subject to production test, specified by design




# **Block diagram**


## Terms




# Inductive and overvoltage output clamp



# Input circuit (ESD protection)




# Short circuit behaviour






# 1 Maximum allowable power dissipation


 $P_{tot} = f(T_C)$  resp.  $P_{tot} = f(T_A) @ R_{thJA}=55 \text{ K/W}$ 

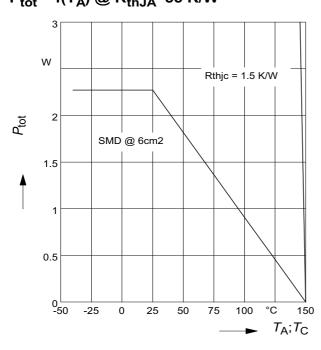


3 On-state resistance R<sub>ON</sub>=f(T<sub>j</sub>); /<sub>D</sub>=3A; V<sub>IN</sub>=5V

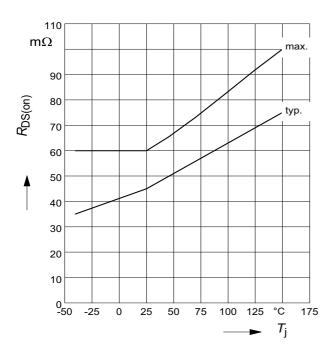

2 On-state resistance *R*<sub>ON</sub>=f(T<sub>j</sub>); *I*<sub>D</sub>=3A; *V*<sub>IN</sub>=10V



**4 Typ. input threshold voltage V<sub>IN(th)</sub> = f(T<sub>j</sub>)**; *I*<sub>D</sub> = 0.7 mA; V<sub>DS</sub> = 12V

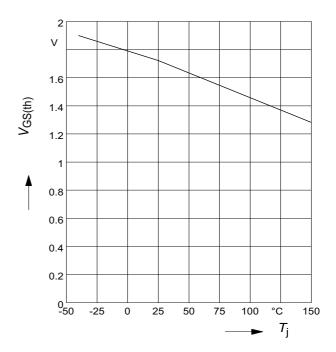


Datasheet




# **5** Typ. transfer characteristics


I<sub>D</sub>=f(V<sub>IN</sub>); V<sub>DS</sub>=12V; T<sub>Jstart</sub>=25°C

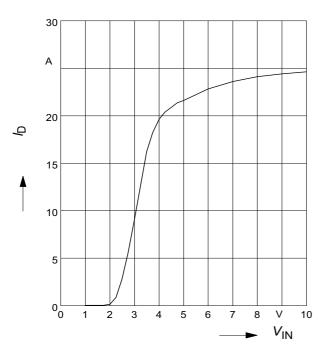


7 Typ. output characteristics I<sub>D</sub>=f(V<sub>DS</sub>); T<sub>Jstart</sub>=25°C Parameter: V<sub>IN</sub>



6 Typ. short circuit current I<sub>D(lim)</sub> = f(Tj); V<sub>DS</sub>=12V Parameter: V<sub>IN</sub>

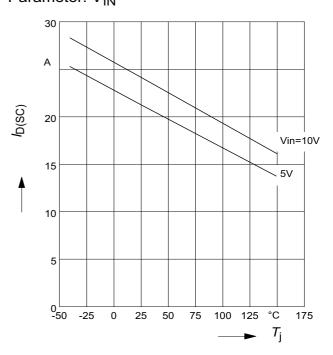

8 Off-state drain current  $I_{\text{DSS}} = f(T_{j})$ 

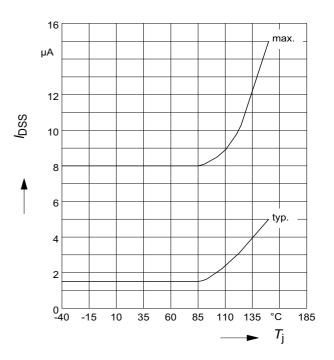


Datasheet



#### 9 Typ. overload current


 $I_{D(lim)} = f(t)$ ,  $V_{bb}$ =12 V, no heatsink Parameter:  $T_{jstart}$ 



# 11 Determination of $I_{D(lim)}$ $I_{D(lim)} = f(t); t_m = 200 \mu s$ Parameter: $T_{Jstart}$

40 А 30 -40°C /D(lim) 25 25°C 20 85°C 15 150°C 10 5 0, 0.1 0.2 0.3 0.4 0.6 ms t

# 10 Typ. transient thermal impedance $Z_{\text{thJA}}=f(t_p) @ 6 \text{ cm}^2 \text{ cooling area}$ Parameter: $D=t_p/T$



Datasheet



**Package Outlines** 

# 1 Package Outlines

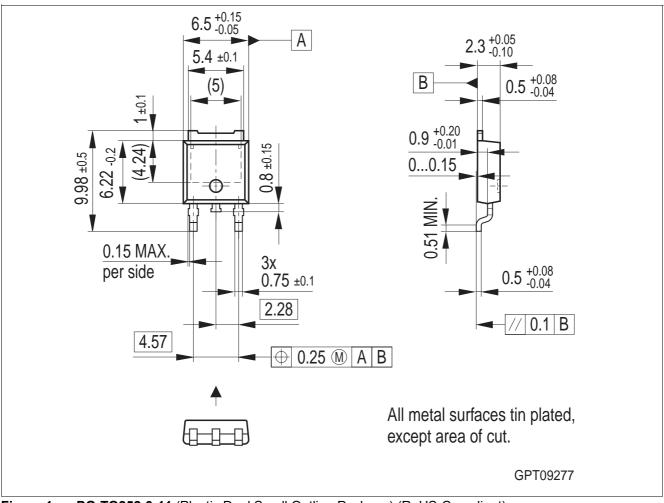


Figure 1 PG-T0252-3-11 (Plastic Dual Small Outline Package) (RoHS-Compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Please specify the package needed (e.g. green package) when placing an order

You can find all of our packages, sorts of packing and others in our Infineon Internet Page "Products": http://www.infineon.com/products.

Datasheet

Rev. 1.3, 2006-12-22



**Revision History** 

# 2 Revision History

Version	Date	Changes
Rev. 1.3	2006-12-22	released automotive green and robust version (BTS)
		Package parameter (humidity and climatic) removed in Maximum ratings
Rev. 1.2	2006-12-11	AEC icon added
		RoHS icon added
		Green product (RoHS-compliant) added to the feature list
		Package information updated to green
		Green explanation added
Rev. 1.1	2006-08-08	released non automotive green version (ITS)
Rev. 1.0	2004-03-05	released production version

Edition 2006-12-22

Published by Infineon Technologies AG 81726 Munich, Germany © Infineon Technologies AG 2007. All Rights Reserved.

#### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

#### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

#### Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.