

HMC348LP3 / 348LP3E

v05.0805



GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz

Typical Applications

The HMC348LP3 / HMC348LP3E is ideal for:

- 75 Ohm Systems
 CATV Signal Distribution, Cable Modem
 Headend & DBS IF Switching
- 50 Ohm Systems

 Basestation Infrastructure & Test Equipment

Features


High Isolation: >80 dB @ 5 MHz (50 Ohm) >55 dB @ 1 GHz (50 Ohm)

"All Off" Isolation State

Non-Reflective Design, 75 Ohm Terminations

3x3 mm SMT Package

Functional Diagram



General Description

The HMC348LP3 & HMC348LP3E are non-reflective GaAs MESFET SPDT switches in low cost leadless QFN surface mount plastic packages ideal for CATV applications. Covering DC to 2.5 GHz, the switch offers high isolation, low insertion loss, integrated 75 Ohm terminations and an "all off" state. The switch features >80 dB isolation at 5 MHz and >55 dB isolation up to 1 GHz. The switch operates using complementary positive control voltage logic lines of +5/0V and requires a +5V bias supply (Vdd). This switch offers excellent performance in both 50 Ohm & 75 Ohm systems for either SPDT or SPST functions.

Electrical Specifications, $T_A = +25^{\circ}$ C, With 0/+5V Control, 50 Ohm System

Parameter	Frequency	Min.	Тур.	Max.	Units
Insertion Loss	DC - 1000 MHz DC - 2500 MHz		0.6 0.7	0.9 1.0	dB dB
Isolation	DC - 250 MHz DC - 750 MHz DC - 1000 MHz DC - 2000 MHz DC - 2500 MHz	63 53 50 47 45	68 58 55 52 50		dB dB dB dB
Return Loss "On State"	DC - 2500 MHz	15	20		dB
Return Loss RF1, RF2 "Off State"	DC - 1000 MHz DC - 2500 MHz	9 8	12 11		dB dB
Input Power for 1 dB Compression	50 MHz 1000 MHz	20 25	23 28		dBm dBm
Input Third Order Intercept (Two-Tone Input Power= 0 dBm Each Tone, 6 MHz Tone Separation)	50 MHz 1000 MHz 2500 MHz		43 48 51		dBm dBm dBm
Input Second Order Intercept (Two-Tone Input Power= 0 dBm Each Tone, 6 MHz Tone Separation)	50 MHz 1000 MHz 2500 MHz		72 89 80		dBm dBm dBm
Switching Characteristics tRISE, tFALL (10/90% RF) tON, tOFF (50% CTL to 10/90% RF)	DC - 2500 MHz		25 600		ns ns

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




v05.0805




GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz


Insertion Loss, 50 Ohm System




Insertion Loss, 75 Ohm System




Isolation, 50 Ohm System




Isolation, 75 Ohm System



Return Loss, 50 Ohm System



Return Loss, 75 Ohm System



Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




HMC348LP3 / 348LP3E

v05.0805



GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz

Input Compression Point, 50 Ohm System



Absolute Maximum Ratings

Bias Voltage Range (Vdd)	+7.0 Vdc
RF Input Power	+30 dBm
Control Voltage Range (A & B)	+0.5V to Vdd + 1.0 Vdc
Channel Temperature	150 °C
Continuous Pdiss (T = 85 °C) (derate 4 mW/°C above 85 °C)	0.3 W
Thermal Resistance (Insertion Loss Path)	104 °C/W
Thermal Resistance (Terminated Path)	240 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



ELECTROSTATIC SENSITIVE DEVICE OBSERVE HANDLING PRECAUTIONS

Bias Voltage & Current

Vdo	Range = +5.0 Vdc ±10	%
Vdd (Vdc)	ldd (Typ.) (mA)	Idd (Max.) (mA)
+5.0	1.1	2.2

Truth Table

Control Input		Signal Path State		
А	В	RFC to RF1	RFC to RF2	
High	Low	On	Off	
Low	High	Off	On	
Low	Low	Off	Off	

Control Voltages

State	Bias Condition
Low	0 to +0.8V @ 5 uA Typical
High	+2.0 to +5.0 Vdc @ 35 uA Typical




HMC348LP3 / 348LP3E


v05.0805




GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz

Outline Drawing







NOTES:

- 1. LEADFRAME MATERIAL: COPPER ALLOY
- 2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
- 3. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
- 4. PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM. PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
- 5. PACKAGE WARP SHALL NOT EXCEED 0.05mm.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
- 7. REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

Package Information

Part Number		Package Body Material	Lead Finish	MSL Rating	Package Marking [3]
HMC348LP3		Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 [1]	348 XXXX
HMC348LP3E	RoHS-	compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 [2]	348 XXXX

- [1] Max peak reflow temperature of 235 °C
- [2] Max peak reflow temperature of 260 $^{\circ}\text{C}$
- [3] 4-Digit lot number XXXX






GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz

Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	Vdd	Supply Voltage +5V ±10%	
2, 4, 5, 6, 9, 12, 15,16	N/C	These pins should be connected to PCB RF ground to maximize isolation.	
3, 7, 14	RFC, RF1, RF2	These pins are DC coupled and matched to 75 Ohms. Blocking capacitors are required.	
8, 13	ACG1, ACG2	External capacitors to ground are required. Select value for optimal isolation below 500 MHz.	
10	В	See truth table and control voltage table.	A,B 133K 500
11	А	See truth table and control voltage table.	<u> </u>

v05.0805

Application Circuit

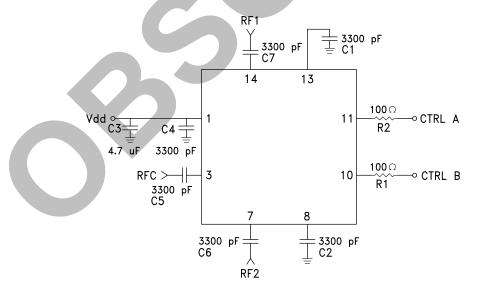

The value of capacitors C1 & C2 are critical for low frequency isolation performance below 500 MHz. 3300 pF 0402 size capacitors are recommended for optimal isolation down to 5 MHz. If the frequency of operation is above 500 MHz then 100 pF to 300 pF 0402 capacitors will be sufficient.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

ANALOGDEVICES


HMC348LP3 / 348LP3E

v05.0805



GaAs MMIC SPDT NON-REFLECTIVE CATV SWITCH, DC - 2.5 GHz

Evaluation PCB (50 Ohms)

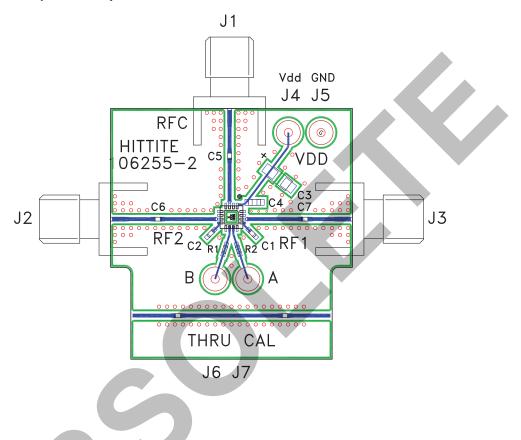

List of Materials for Evaluation PCB 106343 [1]

Item	Description	
J1 - J3	PCB Mount SMA RF Connector	
J4 - J7	DC Pin	
R1 - R2	100 Ohm Resistor, 0402 Pkg.	
C1, C2, C4 - C7	3300 pF Capacitor, 0402 Pkg.	
C3	4.7 uF Tantalum Capacitor	
U1 HMC348LP3 / HMC348LP3E SPDT Switch		
PCB [2]	106255 Evaluation PCB	

^[1] Reference this number when ordering complete evaluation PCB

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF port should have 50 ohm impedance and the package ground leads and package bottom should be connected directly to the ground plane similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.

^[2] Circuit Board Material: Rogers 4350