### EMC Components

#### Noise suppression filter

For home appliances (conductive noise countermeasure) VFS series



**公TDK** 

# VFS6045 type




#### FEATURES

- O A compact noise suppression component for home appliances that accommodates high currents.
- O High magnetic shield construction achieved by a ferrite magnetic material and compatible with high-density mounting.
- Operating temperature range: -40 to +105°C (including self-temperature rise)

#### APPLICATION

O Refrigerators, air conditioners, washing machines, vacuum cleaners, TV

#### PART NUMBER CONSTRUCTION



#### CHARACTERISTICS SPECIFICATION TABLE

Туре	Impedance		DC resistar	ice	Rated current	Part No.
	<b>(</b> Ω <b>)Τyp.</b>	(Ω )Min.	<b>(</b> Ω <b>)typ.</b>	<b>(</b> Ω <b>)max.</b>	(A)max.	
	57	30	0.012	0.0156	6.0	VFS6045VA031
CO 4 5 \ / A	145	120	0.019	0.0247	5.1	VFS6045VA121
6045VA [at 10MHz]	242	200	0.023	0.0299	4.95	VFS6045VA201
	468	300	0.036	0.0468	3.6	VFS6045VA301
	1275	1000	0.075	0.0975	2.5	VFS6045VA102
004504	188	150	0.175	0.2275	1.5	VFS6045SA151
6045SA [at 1MHz]	552	450	0.47	0.611	0.9	VFS6045SA451
מנ וועורובן	1232	1000	1.15	1.495	0.5	VFS6045SA102

#### Measurement equipment

Measurement item	Product No.	Manufacturer
Impedance	4294A	Keysight Technologies
DC resistance	34420A	Hewlett-Packard


\* Equivalent measurement equipment may be used.




Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
(1/4)
Please note that the contents may change without any prior notice due to reasons such as upgrading.
20200805

# VFS6045 type

#### Z FREQUENCY CHARACTERISTICS

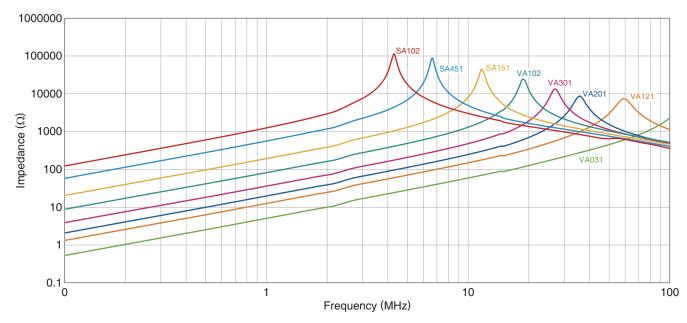


### ■ INSERTION LOSS VS. FREQUENCY CHARACTERISTICS

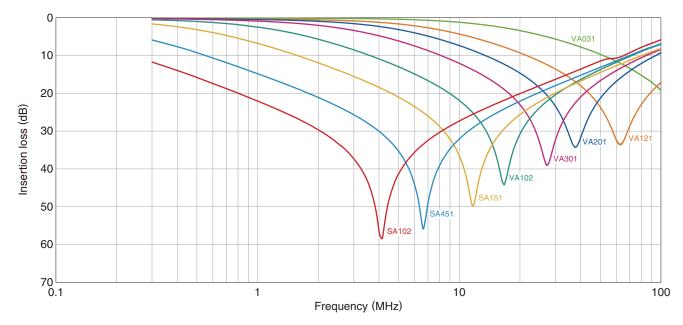



Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
 (2/4)
 Please note that the contents may change without any prior notice due to reasons such as upgrading.
 20200805

# VFS6045 type

#### SHAPE & DIMENSIONS









Dimensions in mm

#### PACKAGING STYLE

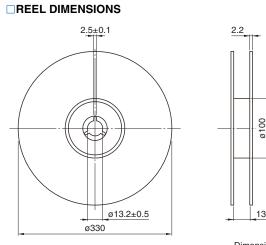

Dimensions in mm

#### **TAPE DIMENSIONS**

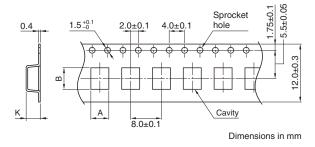

Туре	А	В	К
VFS6045	6.3	6.3	4.7

#### **PACKAGE QUANTITY**

Package quantity	1500 pcs/reel


#### TEMPERATURE RANGE, INDIVIDUAL WEIGHT

	Operating temperature range*	Storage temperature range**	Individual weight
	–40 to +105 °C	–40 to +105 °C	0.6 g
*	Operating temperature range includes self-temperature rise.		


\*\* The storage temperature range is for after the assembly.

### RECOMMENDED LAND PATTERN

RECOMMENDED REFLOW PROFILE



Dimensions in mm

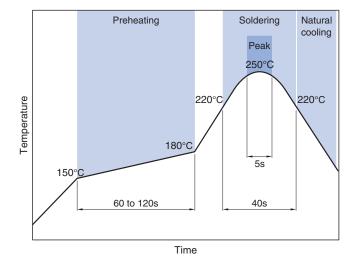

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
 (3/4)
 Please note that the contents may change without any prior notice due to reasons such as upgrading.
 20200805

## **REMINDERS FOR USING THESE PRODUCTS**

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

<ul> <li>The storage period is less than 12 months. Be sure to follow the stora less).</li> <li>If the storage period elapses, the soldering of the terminal electrodes</li> </ul>				
O Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).				
<ul> <li>Before soldering, be sure to preheat components.</li> <li>The preheating temperature should be set so that the temperature of does not exceed 150°C.</li> </ul>	difference between the solder temperature and chip temperature			
Soldering corrections after mounting should be within the range of the If overheated, a short circuit, performance deterioration, or lifespan short	-			
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.				
<ul> <li>Self heating (temperature increase) occurs when the power is turned design.</li> </ul>	ed ON, so the tolerance should be sufficient for the set thermal			
<ul> <li>Carefully lay out the coil for the circuit board design of the non-magnetic A malfunction may occur due to magnetic interference.</li> </ul>	etic shield type.			
$\bigcirc$ Use a wrist band to discharge static electricity in your body through the grounding wire.				
$\bigcirc$ Do not expose the products to magnets or magnetic fields.				
$\bigcirc$ Do not use for a purpose outside of the contents regulated in the deliv	very specifications.			
<ul> <li>The products listed on this catalog are intended for use in general ement, home appliances, amusement equipment, computer equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements ity require a more stringent level of safety or reliability, or whose failur person or property.</li> <li>If you intend to use the products in the applications listed below or if y set forth in the each catalog, please contact us.</li> </ul>	ent, personal equipment, office equipment, measurement equip- e of the applications listed below, whose performance and/or qual- re, malfunction or trouble could cause serious damage to society,			
<ul> <li>(1) Aerospace/aviation equipment</li> <li>(2) Transportation equipment (cars, electric trains, ships, etc.)</li> <li>(3) Medical equipment</li> <li>(4) Power-generation control equipment</li> <li>(5) Atomic energy-related equipment</li> <li>(6) Seabed equipment</li> <li>(7) Transportation control equipment</li> <li>When designing your equipment even for general-purpose applications, tection circuit/device or providing backup circuits in your equipment.</li> </ul>	<ul> <li>(8) Public information-processing equipment</li> <li>(9) Military equipment</li> <li>(10) Electric heating apparatus, burning equipment</li> <li>(11) Disaster prevention/crime prevention equipment</li> <li>(12) Safety equipment</li> <li>(13) Other applications that are not considered general-purpose applications</li> <li>you are kindly requested to take into consideration securing pro-</li> </ul>			

A Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading. (4/4)