Panasonic Encoders/EVQV6

20/12 mm Center Space Encoders

Type: **EVQV6**



Features

- Multiple unit construction (achieved by mounting switches, LEDs, etc.)
 (center space) on the printed wiring board
- Good operability and high reliability

■ Recommended Applications

- Car audio products (adjustment of volume, tone, tuners, etc.)
- AV equipment (control of edit functions of VCRs, CD players, etc.)


■ Explanation of Part Numbers

1	2	3	4	5	6	7	8	9	10	11	12
E	V	Q	V	6							
Product Code			Type			Design No.			Output(Pulses)		

■ Specifications

	Rotation Angle	360 ° (Endless)					
Mechanical	Rotation Torque (Detents Torque)	7 mN·m, 11 mN·m, 18 mN·m					
	Detents	18 points, 30 points					
	Output Signal	Phase A and B					
	Resolution	9 pulses/360 °,15 pulses/360 °					
	Rating	1 mA 10 V DC					
Electrical	Contact Resistance	1 Ω max.					
	Chattering	5 ms max.					
	Insulation Resistance	50 m Ω min. (at 250 VDC)					
	Dielectric Withstanding Voltage	300 VAC for 1 minute					
Endurance	Rotation Life	30,000 cycles min.					
Minimum Qu	uantity/Packing Unit	100 pcs. (Tray Pack)					
Quantity/Car	ton	2,000 pcs.					


■ Dimensions in mm (not to scale)

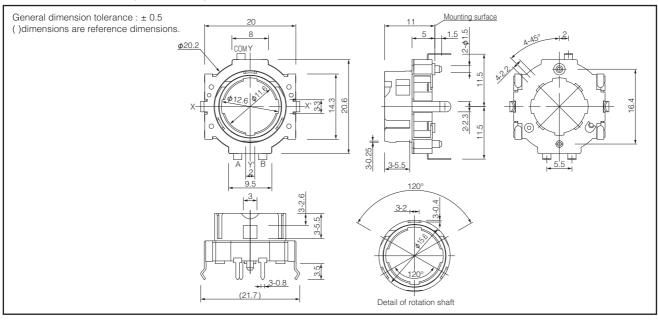


Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Panasonic Encoders/EVQV6


■ PWB mounting hole for reference

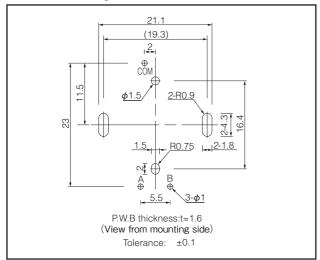


■ Circuit Diagram

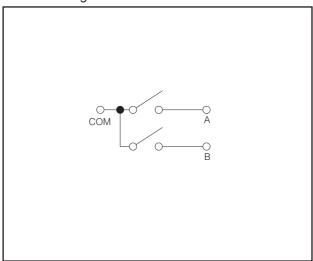

■ Phase Difference

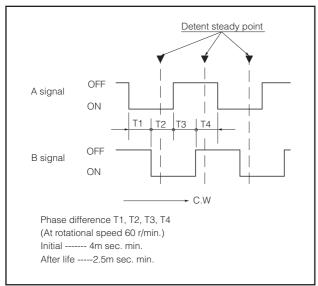

■ Test Circuit Diagram

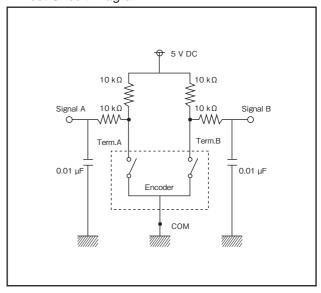

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

Downloaded from Arrow.com.