
Subject				Spec. No.
	151-EXB-28N03DE			
Chip Resistor Array Part No.				
i alt ivo.	8-1			
1. Dimension				
		(1)Substrate	(2)Protective coating	(3)Resistive element
		Alumina	Resin	Ruthenium oxide
	M	(4)Termination (Inner)	(5)Termination (Between)	(6) Termination (Outer)
		Ag or Ag/Pd Side:Resin+Metal	Ni Plating	Sn Plating
$ \begin{array}{c c} P & {}^{i^{a}} \\ \leftarrow & L \\ \leftarrow & L \end{array} $, T			
		cional plan (4) (5) (6)		
Dimension(mm)	L W 2.00±0.10 1.00±0	T .10 0.35 \pm 0.10	A1 0.45±0.10 0	A2 0.35±0.10
			-	ference
Dimension(mm) (B P 0.20±0.10 (0.50	G 0.25±0.10	()· Ke	lerence
2. Power derating cur	ve			
100 -55°C -55°	70°C 70°C 0 0 20 40 60 80 100 Ambient Temperature(°C	-55° 125°C 120 140 160	gory temperature ra °C to +125°C	ange
2 Dating	Fig. 1			
3. Ratings	Dated V-1	Employet		
Item	Rated Value	Explanation When used at an	nbient temperatu	re over 70 °C.
Rated Dissipation	0.063 W / element	the rated dissignment of the shown in Fig.1	pation should be	e reduced as
	Chip jumper : Rated			
Rated voltage &	The rated voltage equation below, an	d when the rate	d voltage exceeds	s the limiting
Rated Continuous	element voltage, the limiting element voltage should the maximum working voltage.			
Working Voltage (RCWV)	$E = \sqrt{P \times R}$ E: Rated voltage(V	Limiting elemen), P: Rated dissipa		resistance(Ω))

Panasonic Electronic Devices Co., Ltd.

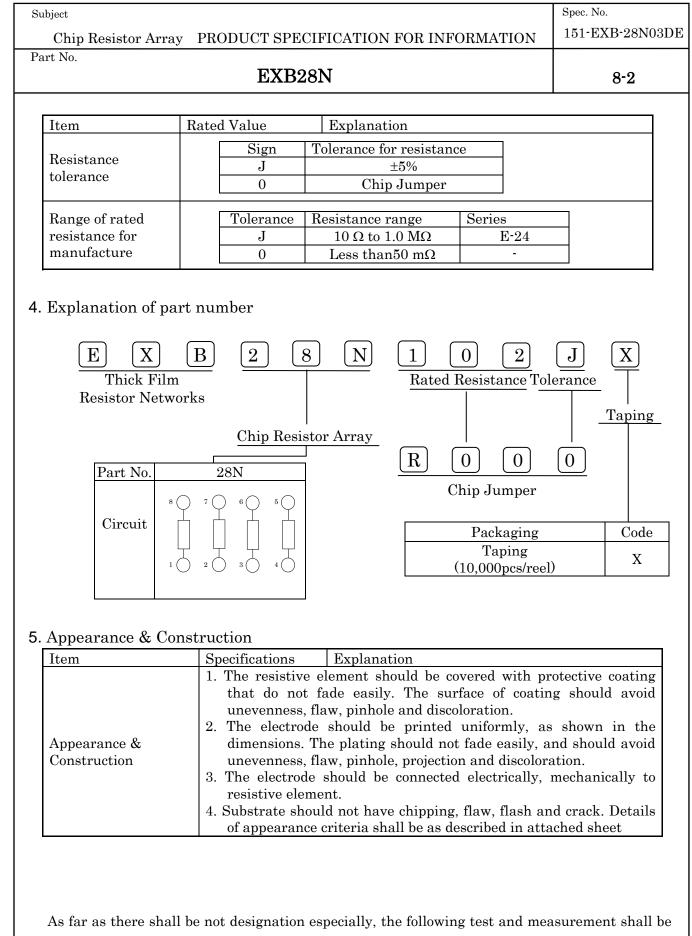

operated under normal temperature(15 °C to 35 °C), normal humidity(25 %RH to 75 %RH), normal atmospheric pressure(86 kPa to 106 kPa).

Subject			Spec. No.
Chip Resisto	r Array PRODUCT S	SPECIFICATION FOR INFORMATION	151-EXB-28N03DE
Part No.			
	EΣ	XB28N	8-3
6. Performance	e Specification		
Item	Specification	Test methods	

Item	Specification		Test methods
Item	Resistor	Jumper	1 est methods
DC resistance	DC resistance value shall be within the specified tolerance	Less than 50 mΩ	Measuring voltage: refer to JIS-C5201-1 At 20 °C, 65 %RH
Temperature coefficient	Resistance 10Ω to 1MΩ ±2 Chip jumper : Less than 5	TCR 00×10 ⁻⁶ / °C 0 mΩ	Natural resistance change per temperature degree centigrade. $TCR = \frac{R_2 \cdot R_1}{R_1 \times (t_2 \cdot t_1)}$ R1: Resistance value at reference temperature(t_1) R2: Resistance value at test temperature(t_2) t_2 \cdot t_1 = 100 °C, t_1 = 25 °C
Overload	±(2 %+0.1 Ω)	Less than 50 mΩ	Resistors shall be applied 2.5 times the rated voltage for 5 seconds. However, the upper limit of the voltage in the test shall be 100V. In addition, the current applied to the jumper in the test shall be 2A.
Dielectric Withstanding	No evidence of flas mechanical damag insulation breakdo	e, arcing or	AC 100V between substrate and termination for 1 minute.
Insulation Resistance	Min. 1,000 MΩ		Insulation resistance between substrate and termination shall be measured at DC 100V.

7. Mechanical characteristic

Item	Specification		Test methods	
Item	Resistor J			
Bend strength of	No mechanical dar	IIago	Substrate: Glass epoxy(t = 1.0 mm) Span: 90 mm	
the face plating	±(1 %+0.05 Ω)	T 1	Bending distance: 3 mm (10 seconds)	
Solderability	Termination show uniformly with sol (min. 95 % coverag	aer.	Resistors shall be dipped in the melted solder bath at 235 °C \pm 5 °C for 2 s \pm 0.5 s. Flux shall be removed from the surface of termination with clean organic solvent.	

Subject

Part No.

Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION

EXB28N

Item	Specification		Test methods	
Item	Resistor	Jumper	Test methods	
Resistance to	$\pm (1 \% + 0.05 \Omega)$	Less than	Resistors shall be dipped in the melted solder	
soldering heat	±(1 %+0.05 22)	$50 \text{ m}\Omega$	bath at 270 °C \pm 5 °C for 10s \pm 1s.	
Vibration	±(1 %+0.05 Ω)	Less than 50 mΩ	Resistors shall be subjected to a single vibration having as double amplitude of 1.5 mm for 2 hours in each three mutually perpendicular directions for total 6 hours. The vibration frequency shall be varied uniformly 10 Hz to 55 Hz and return to 10 Hz traversing for 1 minute.	
	Without distinct d	leformation in	Solvent solution: Isopropyl alcohol	
	appearance		(1) Dipping 10 hours \pm 1 hour, dry in room	
Solvent resistance	±(0.5 %+0.05 Ω)	Less than 50 mΩ	 condition for 30 min ± 10 min. (2) Ultrasonic wave washing: 5 min ± 1 min (0.3 W/cm²,28 kHz) Dry in room condition for 30 min ± 10 min. 	

8. Environmental Test

Itom			mark and the	
Item	Resistor	Jumper	Test methods	
Low temperature exposure	±(1 %+0.05 Ω)	Less than 50 mΩ	Resistors shall be exposed at -55 °C \pm 3 °C for 1000 hours $^{+48}_{0}$ hours	
Endurance at upper category temperature	±(1 %+0.05 Ω)	Less than 50 mΩ	Resistors shall be exposed at +125 °C±3 °C for 1000 hours $^{+48}_{0}$ hours.	
Temperature cycling	±(1 %+0.05 Ω)	Less than 50 mΩ	-55 °C ± 3 °C, 30 minutes $\uparrow\downarrow$ Nominal temp., 30minutes 25cycles $\uparrow\downarrow$ +125 °C ± 3 °C, 30minutes	
Humidity (Steady state)	±(1 %+0.05 Ω)	Less than 50 mΩ	Resistors shall be exposed at 60 °C \pm 2 °C and 90 % to 95 % relative humidity in a humidity test chamber for 1000 hours $^{+48}_{-0}$ hours.	
Endurance at 70 °C	±(3 %+0.1 Ω)	Less than 50 mΩ	Resistors shall be exposed at 70 °C \pm 2 °C for 1000 hours $_{0}^{+48}$ hours. During this time, the rated voltage shall be applied intermittently for 1.5 hours ON, 0.5 hour OFF.	
Load life in Humidity	±(3 %+0.1 Ω)	Less than 50 mΩ	Resistor shall be exposed at 60 °C \pm 2 °C and 90 % to 95 % relative humidity for 1000 hours $_{0}^{+48}$ hours. During this time, the rated voltage shall be applied intermittently for 1.5 hours ON, 0.5 hour OFF.	

9. Resistance value marking

No marking.

Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION Part No. EXB28N 10. Notice for use Image: Notice for use (1)This specification shows the quality and performance of the product in a unit adoption, be sure to evaluate and verify the product mounting it in your produt (2)We take no responsibility for troubles caused by the product usage that is a specification. (3)In traffic transportation equipment (trains, cars, traffic signal equipment, aerospace equipment, electric heating appliances, combustion a rotating equipment, disaster and crime preventive equipment, etc. in cases that the failure of this product gives serious damage to human life and others, and ensure safety by studying the following items to • Ensure safety as the system by setting protective circuits and protective equipment. (4)When a dogma shall be occurred about safety for this product, be sure to operate your technical examination. (5) The product is designed to use in general standard applications of general ele (AV products, household electric appliances, office equipment, information and the sure office equipment.	uct. not specified in this nent, etc.), medical and gas equipment, where it is forecast s, use fail-safe design equipment.
Image: Product state of the system by setting protective circuits and protective circuits as do no single failure. (1) This specification shows the quality and performance of the product in a unit adoption, be sure to evaluate and verify the product mounting it in your product (2) We take no responsibility for troubles caused by the product usage that is a specification. (3) In traffic transportation equipment (trains, cars, traffic signal equipment, aerospace equipment, electric heating appliances, combustion a rotating equipment, disaster and crime preventive equipment, etc. in cases that the failure of this product gives serious damage to human life and others, and ensure safety by studying the following items to • Ensure safety as the system by setting protective circuits and protective of the system by setting such redundant circuits as do no single failure. (4) When a dogma shall be occurred about safety for this product, be sure to operate your technical examination. (5) The product is designed to use in general standard applications of general ele (AV products, household electric appliances, office equipment, information and ensure sure sure of the sure to operate your technical examination.	it component. Before uct. not specified in this nent, etc.), medical and gas equipment, where it is forecast s, use fail-safe design equipment.
 Notice for use (1)This specification shows the quality and performance of the product in a unit adoption, be sure to evaluate and verify the product mounting it in your produ (2)We take no responsibility for troubles caused by the product usage that is a specification. (3)In traffic transportation equipment (trains, cars, traffic signal equipment, aerospace equipment, electric heating appliances, combustion a rotating equipment, disaster and crime preventive equipment, etc. in cases that the failure of this product gives serious damage to human life and others, and ensure safety by studying the following items to Ensure safety as the system by setting protective circuits and protective ensure safety as the system by setting such redundant circuits as do no single failure. (4)When a dogma shall be occurred about safety for this product, be sure to operate your technical examination. (5) The product is designed to use in general standard applications of general electors. 	uct. not specified in this nent, etc.), medical and gas equipment, where it is forecast s, use fail-safe design equipment.
 (1)This specification shows the quality and performance of the product in a unit adoption, be sure to evaluate and verify the product mounting it in your product (2)We take no responsibility for troubles caused by the product usage that is a specification. (3)In traffic transportation equipment (trains, cars, traffic signal equipment equipment, aerospace equipment, electric heating appliances, combustion a rotating equipment, disaster and crime preventive equipment, etc. in cases that the failure of this product gives serious damage to human life and others, and ensure safety by studying the following items to Ensure safety as the system by setting protective circuits and protective equipment. (4)When a dogma shall be occurred about safety for this product, be sure to operate your technical examination. (5) The product is designed to use in general standard applications of general ele (AV products, household electric appliances, office equipment, information and the summation applications. 	uct. not specified in this nent, etc.), medical and gas equipment, where it is forecast s, use fail-safe design equipment.
 adoption, be sure to evaluate and verify the product mounting it in your product (2) We take no responsibility for troubles caused by the product usage that is a specification. (3) In traffic transportation equipment (trains, cars, traffic signal equipment, aerospace equipment, electric heating appliances, combustion a rotating equipment, disaster and crime preventive equipment, etc. in cases that the failure of this product gives serious damage to human life and others, and ensure safety by studying the following items to Ensure safety as the system by setting protective circuits and protective e Ensure safety as the system by setting such redundant circuits as do no single failure. (4) When a dogma shall be occurred about safety for this product, be sure to operate your technical examination. (5) The product is designed to use in general standard applications of general ele (AV products, household electric appliances, office equipment, information and ensure safety as the set in general standard applications of general ele (AV products, household electric appliances, office equipment, information and ensure safety as the set in the general standard applications of general element. 	uct. not specified in this nent, etc.), medical and gas equipment, where it is forecast s, use fail-safe design equipment.
 equipment, etc.); hence, it do not take the use under the following special env consideration. Accordingly, the use in the following special environments, and such environmay affect the performance of the product; prior to use, verify the performance thoroughly. 1) Use in liquids such as water, oil, chemical, and organic solvent. 2) Where the product is close to a heating component, or where an inflamma polyvinyl chloride wire is arranged close to the product. 3) Where the product is sealed or coated with resin, etc. 4) Where water or a water-soluble detergent is used in cleaning free solder attention to soluble flux.) 5) Use in such a place where the product is wetted due to dew condensation. 6) Use in places full of corrosive gases such as sea breeze, Cl₂, H₂S, NH₃, SO: 7) Use under direct sunlight, in outdoor or in dusty atmospheres. 8) Use in environment with large static electricity or strong electromagnetic (6)If transient load (heavy load on a short time) like pulse is expected to be evaluation and confirmation test with resistors actually mounted on your or load of more than rated power is applied under the load condition at steady performance and/or reliability of resistor. Never exceed the rated power. When the product shall be used under special condition, be sure to ask us in a (7)Halogen type (chlorine type, bromine type, etc.) or other high-activity flux is not the residue may affect performance or reliability of resistors. (8)When soldering with soldering iron, never touch the body of the chip resist soldering iron. When using a soldering iron with a tip at high temperature, short as possible. (Three seconds or less up to 350 °C) (9)Avoid physical shock to the resistor and nipping of the resistor with hard too tweezers) as it may damage protective firm or the body of resistor and nipping 	o inform us rapidly, ectric equipment ad communication vironments into mental conditions ce, reliability, etc. able such as a ring (Pay particular 2, and NOx. 2, and NOx. 2, and NOx. 4, and NOx. 5, and NOx. 5, and NOx. 6, applied, carry out wn board. When the state, it may impair advance. not recommended as tor with a tip of the solder for a time as ol (a pair of pliers or

Subject		Spec. No.
Chip Resistor Array	PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28N03DE
Part No.		

EXB28N

11. Storage method

If the product is stored in the following environments and conditions, the performance and solderability may be badly affected. Avoid the storage in the following environments.

- (1) Storage in places full of corrosive gases such as sea breeze, Cl₂, H₂S, NH₃, SO₂, and NO_X.
- (2) Storage in places exposed to direct sunlight.
- (3) Storage in places outside the temperature range of 5 °C to 35 °C and humidity range of 45 %RH to 85 %RH.
- (4) Storage over a year after our delivery (This item also applies to the case where the storage method specified in item (1) to (3) has been followed.).

12. Laws and Regulations

- (1) No ODCs or other ozone-depleting substances that are subject to regulation under the Montreal Protocol are used in our manufacturing processes, including in the manufacture of this product.
- (2) This product complies with the RoHS Directive (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (DIRECTIVE 2002/95/EC)).
- (3) All materials used in this product are existing chemical substances recognized under "lows on examination of chemical substances and regulations of manufacturing and others."
- (4) None of the materials used in this product contain the designated incombustible bromic substances, PBBOs and PBBs.
- (5) Please contact us to obtain a notice as to whether this product has passed inspection under review criteria primarily based on Foreign Exchange and Foreign Trade Control Laws, and appended table in the Export Control Laws.


13. Production Place


Production Country : Japan

Production Plant : Panasonic Electronic Devices Japan Co., Ltd..

Production Country : China

Production Plant : Panasonic Electronic Devices (Tianjin) Co., Ltd.(PEDTJ)

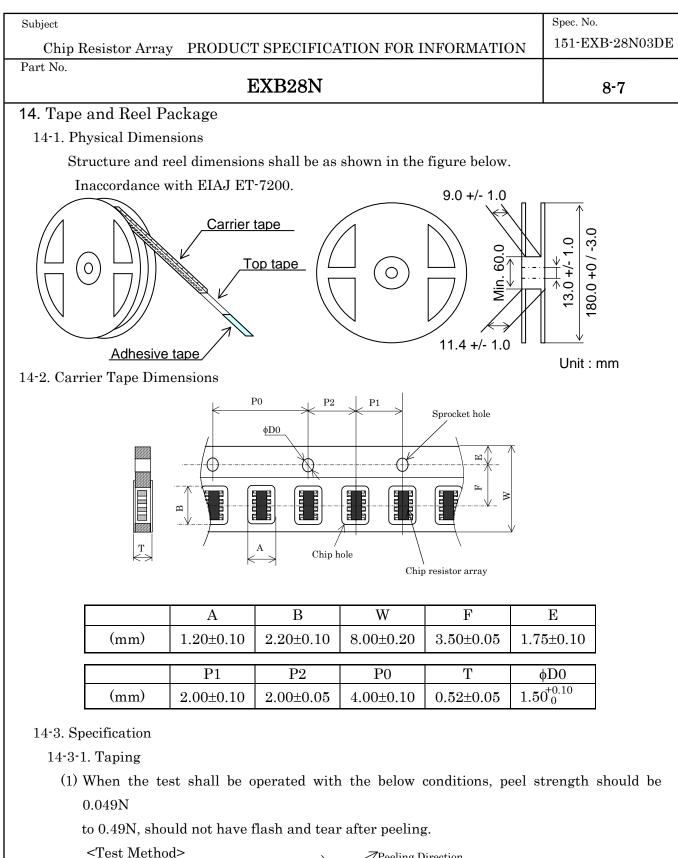



(2) Minimum Bending Radius

When carrier tape shall be bent by minimum bending radius (15 mm), no defection of chip and no break of carrier tape. However minimum bending radius shall be tested for 1 times.

Subject	Spec. No.
Chip Resistor Array PRODUCT SPECIFICATION FOR INFORMATION	151-EXB-28N03D
Part No. EXB28N	8-8
(3) Resistance to climate	•
When resistors shall be exposed at 60 °C \pm 2 °C, 90 %RH to 95 %RH for	120 hours no
defection of chip and no break off carrier tape.	120 110415, 110
When the top tape shall be peeled, tape should not have flash and tear.	
when the top tape shall be peered, tape should not have hash and tear.	
14-3-2. Quantity in Taping: 10,000 pcs. / reel	
14-3-3. Tape packaging	
(1) Resistor side shall be facing upward.	
(2) Chip resistor shall not be sticking to top tape and bottom tape.	
(3) Chip resistors shall be easy to take out from carrier tape and chip hole	or sprocket hole
shall not have flash and break.	
14-4. Outer Packaging	
Quantity: 20 reels(Max.200,000 pcs.)	
Tape	
Marking	
(1) When packaging quantity does not reach max quantity, the remaining	ampty appended
be buried with buffer material.	empty space shan
(2) When quantity shall be few, alternative packaging methods may used.	No problem must
occur during the exportation of the product.	No problem must
occur during the exportation of the product	
14-5. Marking	
At last, production country is displayed in English.	
• Side of reel (Marking shall be on one side.)	
(1)Part name (2)Part number (3)Quantity (4)Lot number (5)Maker 1	name
(6)Production country	
•Packaging box	
(1)Customer name (2)Part name (3)Part number (4)Customer part nu	ımber

(5)Quantity (6)Maker name (7) Production country

