

# Type YD

Order Number LBWA1ZVVDZ

## Size-Optimized Wi-Fi + MCU


- 2.4GHz Wi-Fi Module
- Network Topology: AP & STA dual mode
- Chipset: BCM43362 + STM32 ARM Cortex-M3
- Processor: STM32 ARM Cortex-M3

## Feature rich software hosted on module

- Wi-Fi driver, TCP/IP stack and security supplicant
- Broadcom WICED SDK

Recommended Available

Add to Compare List

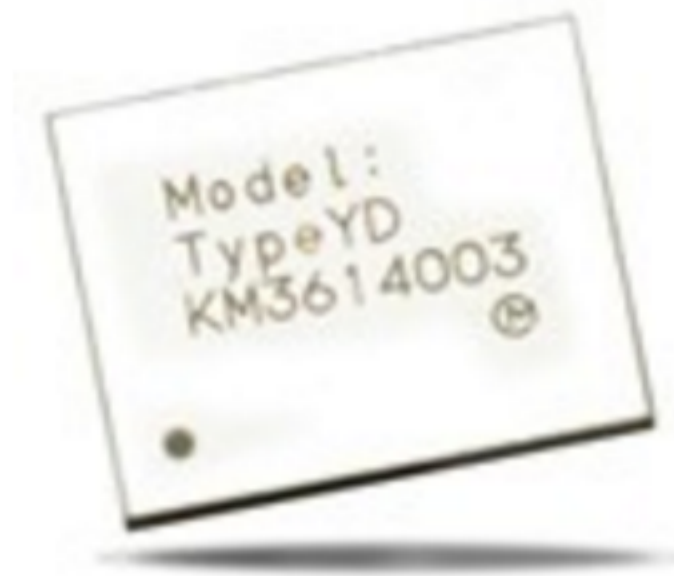

Description **Specs** Documents Software FAQ Purchase Contact Us

Annual Volume	50000
Product Type	Module
Grade	Consumer
Frequency	2.4GHz
Chipset	BCM43362 + STM32 ARM Cortex-M3
Processor	STM32 ARM Cortex-M3
Modulation	No
Antenna	External
RF Conn/ Antenna	Not Included
System Clock	Internal X'tal
Operating Temperature °C (min)	-40
Operating Temperature °C (max)	+85
Mounting Type	SMT
Package	LGA
Dimension	10.0 x 7.9 x 1.25 mm
Supply Voltage (Vdc)	3.3
Transmit Power	+17dBm
Receiver Sensitivity	-87dBm @ 11Mb/s
Transmit Mode Current	365mA @ +17dBm or 440mA @ +19dBm (11Mb/s)
Receive Mode Current	160mA
Data Rate WLAN	11, 54, 64 Mbps
Bluetooth	No
WLAN	802.11b/g/n
Technology	Wi-Fi
Network	AP & STA dual mode
Host Interface	UART
Host Interface Other	No
Interface Voltage (Vdc for VIO)	2.4 to 3.6
FCC/IC Certified	FCC/IC "Reference" Certified
ETSI Certified	Yes
RoHs Compliant	Yes
ISO9001	No
TS16969	No
Certification	<ul style="list-style-type: none"> <li>• CE (Europe) EN 300328 V1.8.1</li> </ul> <p>Conducted Test Report available</p> <p>Note: CE marking and declaration should be done by customer as a final product.</p>

### Related Links

- [Applications for Wireless](#)
- [Support for Wireless](#)
- [Wireless Modules for IoT Applications](#)
- [Wi-Fi/Bluetooth Modules for NXP i.MX](#)

### Related Product Categories

- [« Go Back](#)
- [802.15.4](#)
- [Bluetooth & BluetoothSmart](#)
- [Wi-Fi](#)
- [Wi-Fi + Bluetooth](#)
- [HyperMesh / FHSS](#)
- [Wi-Fi Bluetooth for NXP i.MX](#)
- [Cloud Connectivity](#)
- [M2M & Sensor Networking](#)
- [Wireless Network / Telemetry](#)
- [RFIC Radios](#)
- [SAW Radios](#)
- [Resonators](#)
- [Filters](#)
- [Frequency Control](#)