

# LQP02TN1N5C02#

“#” indicates a package specification code.


Size Code 0402 (01005) in mm (in inch)



< List of part numbers with package codes >

LQP02TN1N5C02B      LQP02TN1N5C02D      LQP02TN1N5C02L

## Appearance & Shape



## References

Packaging	Specifications	Standard Packing Quantity
B	Bulk(Bag)	500
D	180mm Paper Tape	20000
L	180Embossed Tape	40000

Mass (typ.)	
1 piece	0.05mg

**Attention**

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# LQP02TN1N5C02#

“#” indicates a package specification code.



## Specifications

L size	0.4±0.02mm
W size	0.2±0.02mm
T size	0.2±0.02mm
Size code inch (mm)	01005 (0402)
Inductance	1.5nH±0.2nH
Inductance Test Frequency	500MHz
Rated current (Itemp) (Based on Temperature rise)	220mA
Max. of DC resistance	0.6Ω
Q(min.)	8
Q Test Frequency	500MHz
Self resonance frequency (min.)	9500MHz
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Brand	Murata
Series	LQP02TN_02

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


# LQP02TN1N5C02#

“#” indicates a package specification code.

## Characteristic Data

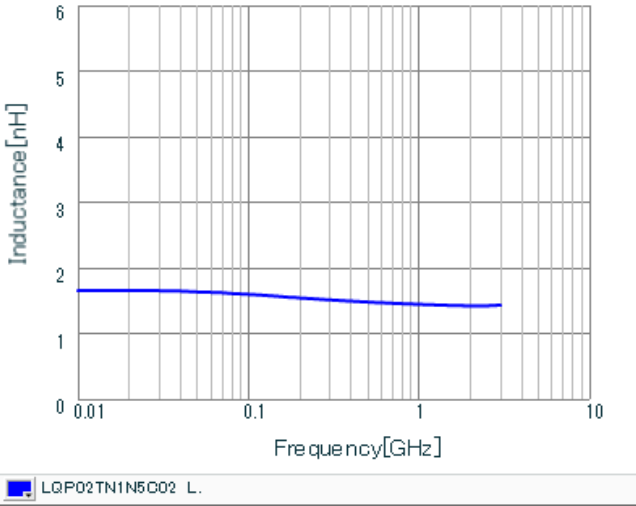

Inductance - Frequency Characteristics

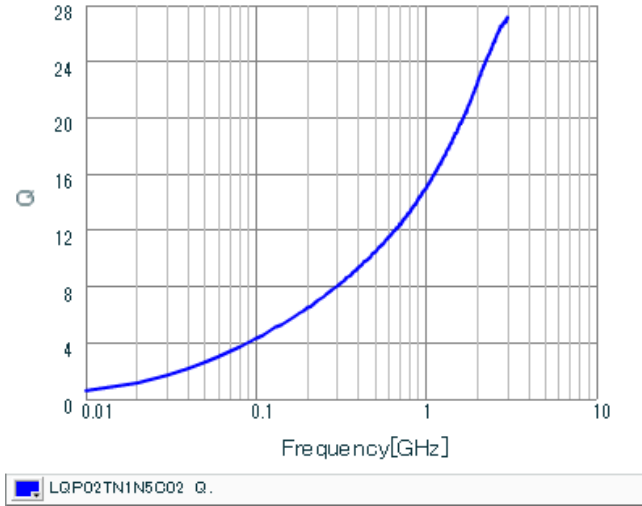

Q-Frequency Characteristics

**Attention**

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.