

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAS8N2J00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW2BAS8N2J00%23

References

## "#" indicates a package specification code.

LQW2BAS8N2J00#


Size Code 2015 (0805) in mm (in inch), Horizontal Wound Type



< List of part numbers with package codes > LQW2BAS8N2J00B LQW2BAS8N2J00K LQW2BAS8N2J00L

# Appearance & Shape





(in mm)

0.25±0.

L

		Standard
Packaging	Specifications	Packing
		Quantity
В	Bulk(Bag)	500
К	330Embossed Tape	8000

180Embossed Tape

Aass (typ.)	
1 piece	0.014g

1 of 3

2000

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





# LQW2BAS8N2J00#

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAS8N2J00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW2BAS8N2J00%23

### "#" indicates a package specification code.



## Specifications

L size	2.09±0.2mm
W size	1.53±0.2mm
T size	1.42±0.1mm
Size code inch (mm)	0805 (2015)
Inductance	8.2nH±5%
Inductance Test Frequency	250MHz
Rated current (Itemp) (Based on Temperature rise)	600mA
Max. of DC resistance	0.12Ω
Q(min.)	50
Q Test Frequency	1000MHz
Self resonance frequency (min.)	4400MHz
Operating Temperature Range(Self-temperature rise is not included)	-55℃ to 125℃
Brand	Murata
Series	LQW2BAS_00

2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.






Product Search Data Sheet

LQW2BAS8N2J00#

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAS8N2J00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW2BAS8N2J00%23

"#" indicates a package specification code.

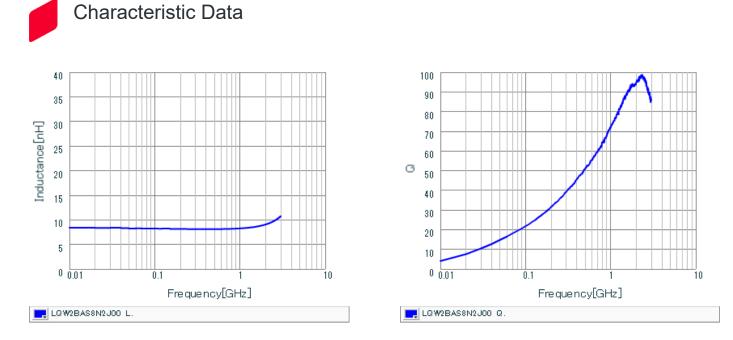

Inductance - Frequency Characteristics

### **Q-Frequency Characteristics**

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



3 of 3