

# LQW15AN8N2G0Z#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW15AN8N2G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW15AN8N2G0Z%23

"#" indicates a package specification code.

Size Code 1005 (0402) in mm (in inch), Wound Type




















< List of part numbers with package codes > LQW15AN8N2G0ZB LQW15AN8N2G0ZD



## Appearance & Shape

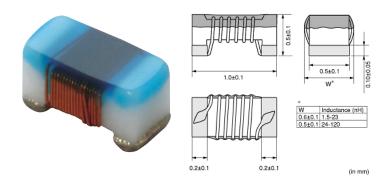



### References

	Specifications	Standard
Packaging		Packing
		Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	10000

Mass (typ.)		
1 pi	iece	0.0008g

1 of 3

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





# LQW15AN8N2G0Z#

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW15AN8N2G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW15AN8N2G0Z%23

"#" indicates a package specification code.



## **Specifications**

L size	1.0±0.1mm
W size	0.6±0.1mm
T size	0.5±0.1mm
Size code inch (mm)	0402 (1005)
Inductance	8.2nH±2%
Inductance Test Frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	540mA
Max. of DC resistance	0.14Ω
Q(min.)	25
Q Test Frequency	250MHz
Self resonance frequency (min.)	5.5GHz
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Brand	Murata
Series	LQW15AN_0Z

2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



### Trouble Start Butter Ships

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW15AN8N2G0Z# from the official website of Murata

Manufacturing Co., Ltd.


http://www.murata.com/en-us/products/productdetail?partno=LQW15AN8N2G0Z%23


"#" indicates a package specification code.



## Characteristic Data

LQW15AN8N2G0Z#

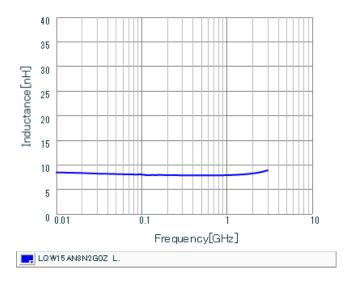

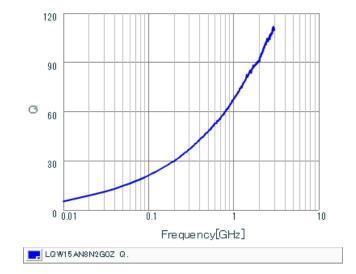

Inductance - Frequency Characteristics

Q-Frequency Characteristics

3 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

