



Inductors for Decoupling Circuits

Wound Ferrite

NLCV-PFD series (For automobiles)

NLCV25-PFD2520 [1008 inch]*NLCV32-PFD3225 [1210 inch]NLCV25-PFRD2520 [1008 inch]NLCV32-PFRD3225 [1210 inch]

* Dimensions Code JIS[EIA]



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS
The storage period is less than 6 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less).
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
○ Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
 Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference.
Use a wrist band to discharge static electricity in your body through the grounding wire.
On not expose the products to magnets or magnetic fields.
On not use for a purpose outside of the contents regulated in the delivery specifications.
The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.



Inductors for Decoupling Circuits Wound Ferrite

Product compatible with RoHS directive
Halogen-free
Compatible with lead-free solders
AEC-Q200

Overview of the NLCV-PFD Series


FEATURES

O Resin mold type wound inductor for decoupling circuits.

APPLICATION

Vehicle accessories (car navigation systems, car audio, ETC, other)

■ PART NUMBER CONSTRUCTION

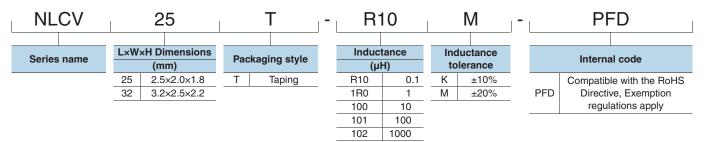

■ OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

	Temperat	ure range		
Type	Operating	Storage	Package quantity	Individual weight
Турс	temperature*	temperature**		
	(°C)	(°C)	(pieces/reel)	(mg)
NLCV25-PFD	-40 to +105	-40 to +105	2000	25
NLCV32-PFD	-40 to +105	-40 to +105	2000	50
NLCV25-PFRD	-40 to +125	-40 to +125	2000	25
NLCV32-PFRD	-40 to +125	-40 to +125	2000	50

^{*} Operating temperature range includes self-temperature rise.

^{**} The Storage temperature range is for after the circuit board is mounted.


RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://www.tdk.co.jp/rohs/

O Halogen-free: Indicates that CI content is less than 900ppm, Br content is less than 900ppm, and that the total CI and Br content is less than 1500ppm.

[•] All specifications are subject to change without notice.

Overview of the NLCV-PFD Series

■ RECOMMENDED REFLOW PROFILE

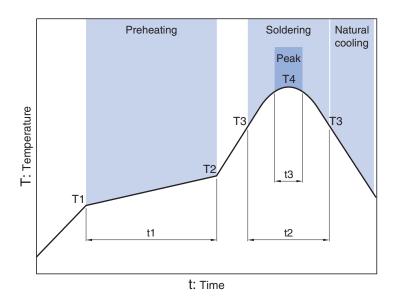

Preheatir	ng		Soldering	I	Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	Т3	t2	T4	t3
150°C	180°C	90 to 120s	230°C	40s	255°C	10s max.


[•] All specifications are subject to change without notice.

NLCV25-PFD Type




公TDK

SHAPE & DIMENSIONS

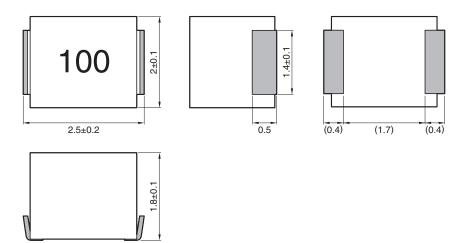

■ RECOMMENDED LAND PATTERN



Dimensions in mm

[•] All specifications are subject to change without notice.

■ ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE

L		Q — ref.	L, Q measuring frequency	DC resistance (Ω)±30%	Rated current* (mA)	Part No.
(μH)	Tolerance		(MHz)	(==)===/-	max.	
1	±20%	20	7.96	0.34	475	NLCV25T-1R0M-PFD
1.5	±20%	20	7.96	0.42	435	NLCV25T-1R5M-PFD
2.2	±20%	20	7.96	0.5	390	NLCV25T-2R2M-PFD
3.3	±20%	20	7.96	0.65	340	NLCV25T-3R3M-PFD
4.7	±20%	20	7.96	0.8	285	NLCV25T-4R7M-PFD
6.8	±20%	20	7.96	1	275	NLCV25T-6R8M-PFD
10	±10%	30	2.52	1.69	210	NLCV25T-100K-PFD
15	±10%	30	2.52	2.2	175	NLCV25T-150K-PFD
22	±10%	30	2.52	2.8	160	NLCV25T-220K-PFD
33	±10%	30	2.52	4.2	120	NLCV25T-330K-PFD

^{*} Rated current: smaller value of either ldc1 or ldc2.

Idc1: When based on the inductance change rate (10% below the initial L value)

Idc2: When based on the temperature increase (Temperature increase of 20°C by self heating)


Measurement item	Product No.	Manufacturer
L, Q	4194A+16085A+16093B	Agilent Technologies
DC resistance	VP-2941A	Panasonic

^{*} Equivalent measurement equipment may be used.



ELECTRICAL CHARACTERISTICS

☐ L FREQUENCY CHARACTERISTICS GRAPH

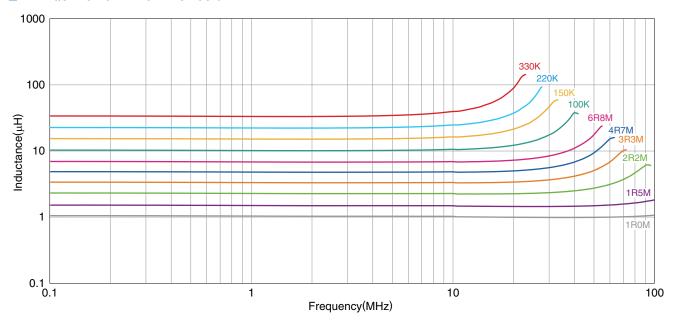

Product No.	Manufacturer
4294A	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



ELECTRICAL CHARACTERISTICS

☐ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

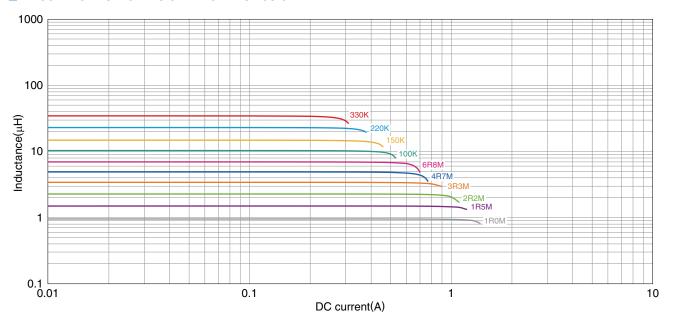

Product No.	Manufacturer
4285A+42841A+42842C	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



■ ELECTRICAL CHARACTERISTICS

□IMPEDANCE FREQUENCY CHARACTERISTICS GRAPH

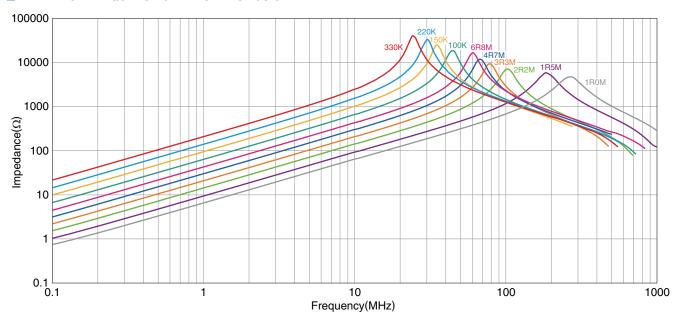

 $\bigcirc \ \text{Measurement equipment}$

Product No.	Manufacturer
4294A	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.


NLCV32-PFD Type



SHAPE & DIMENSIONS

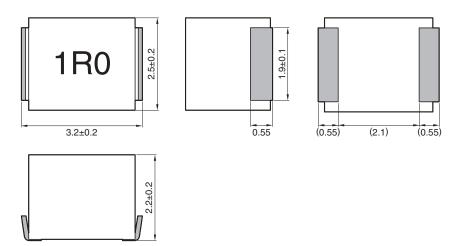

■ RECOMMENDED LAND PATTERN



Dimensions in mm

[•] All specifications are subject to change without notice.

■ ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE

Inductanc	е	Q — ref.	L, Q measuring frequency	Self-resonant frequency	DC resistance (Ω)±30%	Rated current* (mA)	Part No.
(μH)	tolerance	161.	(MHz)	(MHz)min.	(52) ±30 /6	max.	
1	±20%	10	7.96	100	0.06	1000	NLCV32T-1R0M-PFD
1.5	±20%	10	7.96	80	0.11	830	NLCV32T-1R5M-PFD
2.2	±20%	10	7.96	68	0.13	770	NLCV32T-2R2M-PFD
3.3	±20%	10	7.96	54	0.16	690	NLCV32T-3R3M-PFD
4.7	±20%	15	7.96	46	0.2	620	NLCV32T-4R7M-PFD
6.8	±20%	15	7.96	38	0.27	530	NLCV32T-6R8M-PFD
10	±10%	15	2.52	30	0.36	450	NLCV32T-100K-PFD
15	±10%	15	2.52	26	0.56	370	NLCV32T-150K-PFD
22	±10%	15	2.52	21	0.77	300	NLCV32T-220K-PFD
33	±10%	15	2.52	17	1.1	240	NLCV32T-330K-PFD
47	±10%	15	2.52	14	1.64	180	NLCV32T-470K-PFD
68	±10%	15	2.52	12	2.8	140	NLCV32T-680K-PFD
100	±10%	15	0.796	10	3.7	120	NLCV32T-101K-PFD
150	±10%	20	0.796	8	6.1	100	NLCV32T-151K-PFD
220	±10%	20	0.796	7	8.4	80	NLCV32T-221K-PFD
330	±10%	20	0.796	6	12.3	70	NLCV32T-331K-PFD

^{*} Rated current: smaller value of either ldc1 or ldc2.

Idc1: When based on the inductance change rate (10% below the initial L value)

ldc2: When based on the temperature increase (Temperature increase of 20°C by self heating)

\bigcirc Measurement equipment

Measurement item	Product No.	Manufacturer
L, Q	4194A+16085A+16093B	Agilent Technologies
DC resistance	VP-2941A	Panasonic


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



ELECTRICAL CHARACTERISTICS

L FREQUENCY CHARACTERISTICS GRAPH

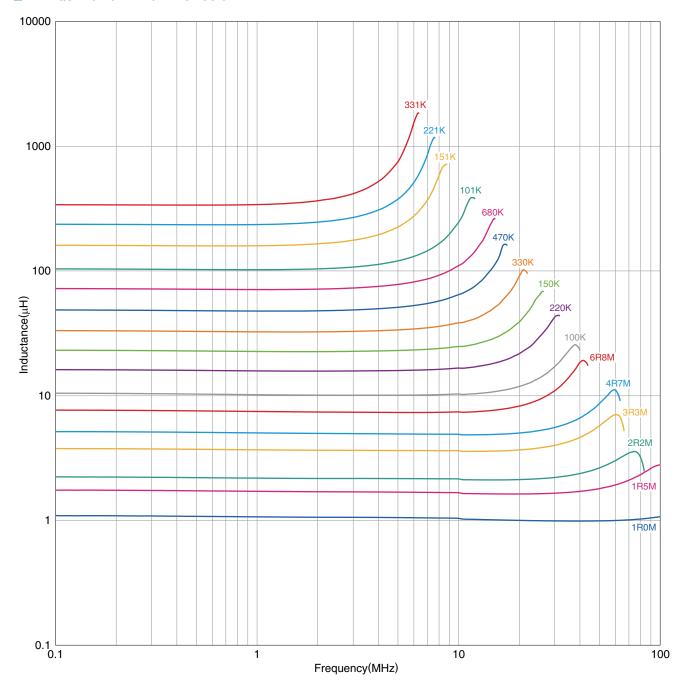

 $\bigcirc \ \text{Measurement equipment}$


Product No.	Manufacturer		
4294A	Agilent Technologies		
* Equivalent measurement equipment may be used.			

[•] All specifications are subject to change without notice.



ELECTRICAL CHARACTERISTICS

☐ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

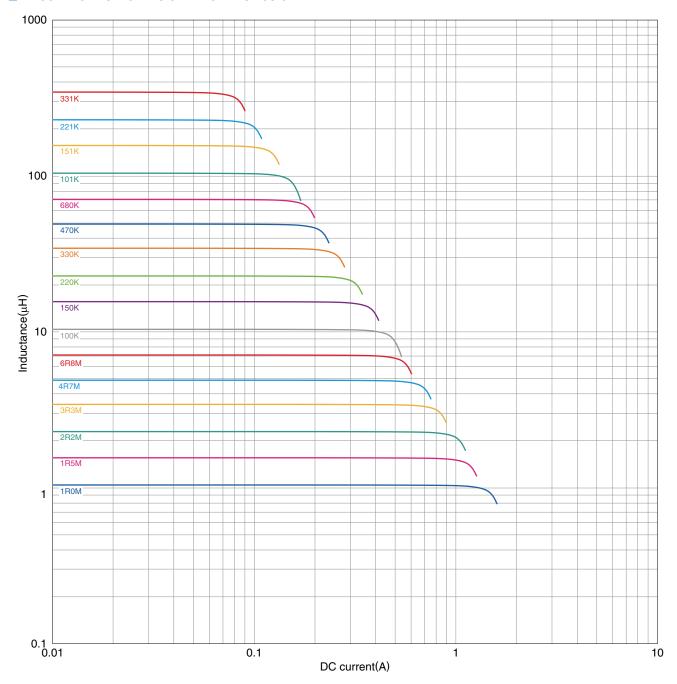

 $\bigcirc \ {\it Measurement equipment}$


Product No.	Manufacturer
4285A+42841A+42842C	Agilent Technologies

[•] All specifications are subject to change without notice.



■ ELECTRICAL CHARACTERISTICS

☐ IMPEDANCE FREQUENCY CHARACTERISTICS GRAPH

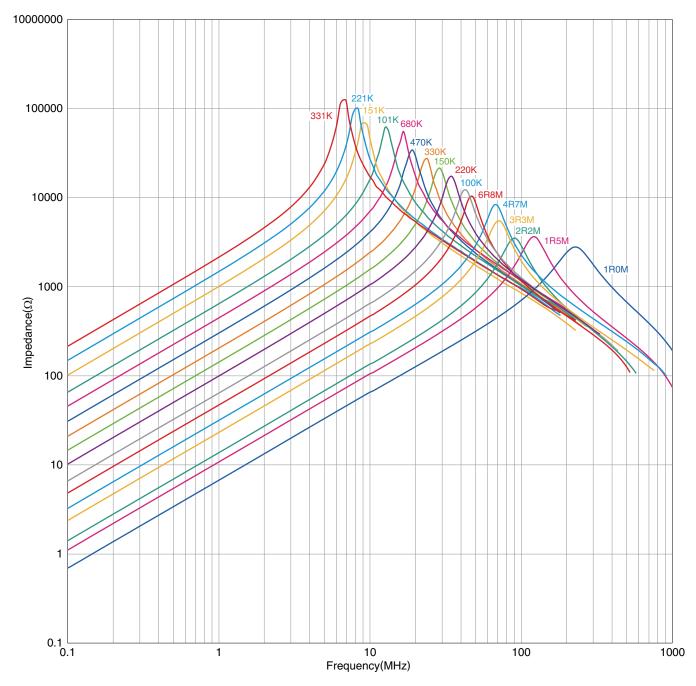

 $\bigcirc \ \text{Measurement equipment}$


Product No.	Manufacturer		
4294A	Agilent Technologies		
* Equivalent measurement equipment may be used.			

[•] All specifications are subject to change without notice.

NLCV25-PFRD Type




SHAPE & DIMENSIONS

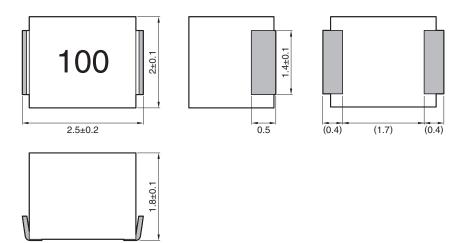

Dimensions in mm

■ RECOMMENDED LAND PATTERN



[•] All specifications are subject to change without notice.

■ ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE

L		Q — ref.	L, Q measuring frequency	DC resistance (Ω)±20%	Rated current* (mA)	Part No.
(µH)	tolerance	— iei.	(MHz)	(22) ±20 /0	max.	
0.1	±20%	5	25.2	0.04	1890	NLCV25T-R10M-PFRD
0.15	±20%	5	25.2	0.044	1800	NLCV25T-R15M-PFRD
0.22	±20%	5	25.2	0.05	1690	NLCV25T-R22M-PFRD
0.33	±20%	5	25.2	0.065	1480	NLCV25T-R33M-PFRD
0.47	±20%	5	25.2	0.08	1340	NLCV25T-R47M-PFRD
0.68	±20%	5	25.2	0.09	1260	NLCV25T-R68M-PFRD
1	±20%	10	7.96	0.14	1000	NLCV25T-1R0M-PFRD
1.5	±20%	10	7.96	0.18	890	NLCV25T-1R5M-PFRD
2.2	±20%	10	7.96	0.27	730	NLCV25T-2R2M-PFRD
3.3	±20%	10	7.96	0.44	570	NLCV25T-3R3M-PFRD
4.7	±20%	10	7.96	0.57	500	NLCV25T-4R7M-PFRD
6.8	±20%	10	7.96	0.92	390	NLCV25T-6R8M-PFRD
10	±10%	15	2.52	1.1	360	NLCV25T-100K-PFRD

^{*} Rated current: smaller value of either ldc1 or ldc2.

Idc1: When based on the inductance change rate (10% below the initial L value)

ldc2: When based on the temperature increase (Temperature increase of 40°C by self heating)


Measurement item	Product No.	Manufacturer
L, Q	4194A+16085A+16093B	Agilent Technologies
DC resistance	VP-2941A	Panasonic

^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.

■ ELECTRICAL CHARACTERISTICS

☐ L FREQUENCY CHARACTERISTICS GRAPH

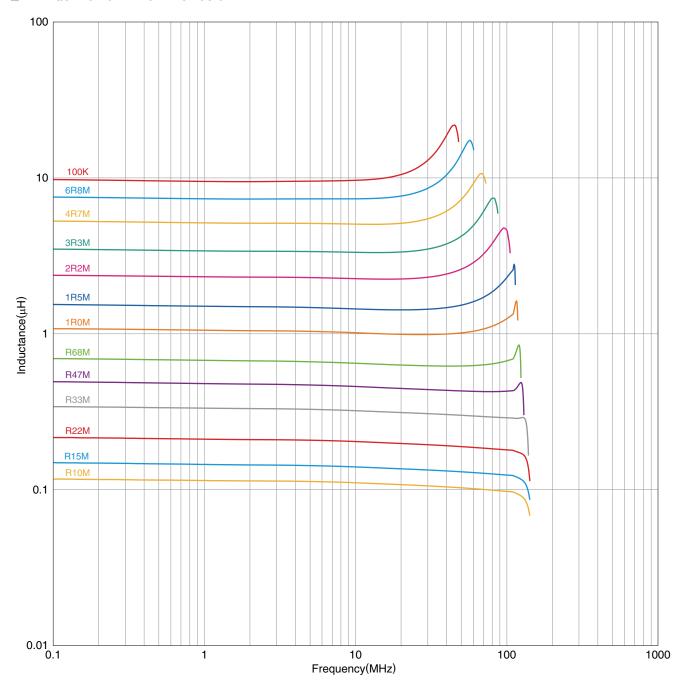

Product No.	Manufacturer
4294A	Agilent Technologies


st Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



ELECTRICAL CHARACTERISTICS

☐ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

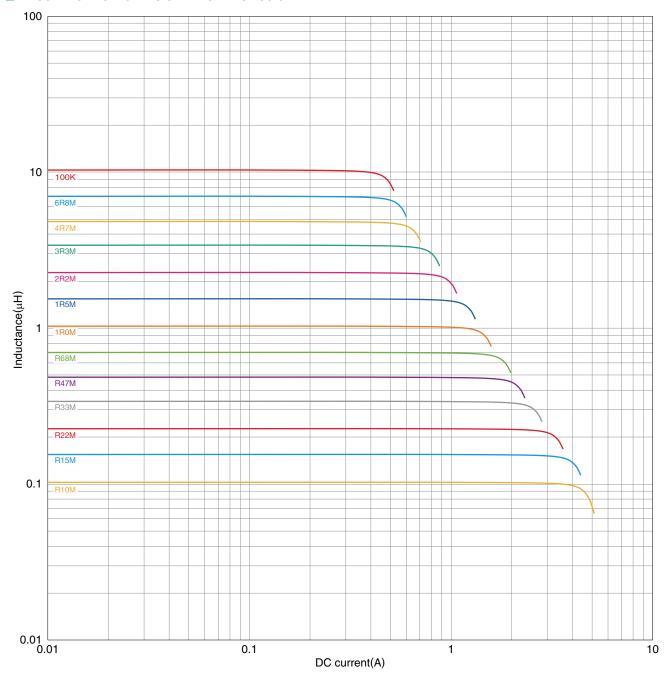

• • •	
Product No.	Manufacturer
4285A+42841A+42842C	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



■ ELECTRICAL CHARACTERISTICS

☐ IMPEDANCE FREQUENCY CHARACTERISTICS GRAPH

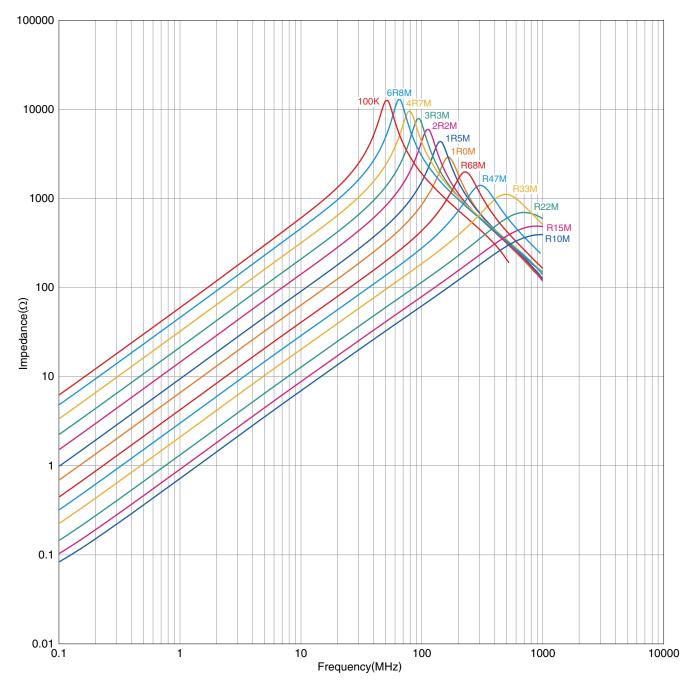

 $\bigcirc \ {\it Measurement equipment}$

Product No.	Manufacturer
4294A	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.

NLCV32-PFRD Type




SHAPE & DIMENSIONS

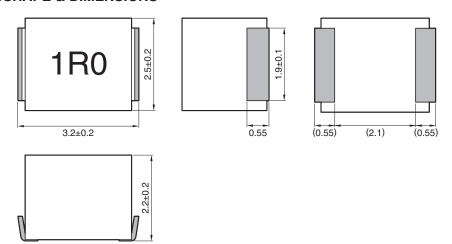

Dimensions in mm

■ RECOMMENDED LAND PATTERN



[•] All specifications are subject to change without notice.

■ ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE

L		Q — ref.	L, Q measuring frequency	DC resistance		Part No.
(μH)	Tolerance	161.	(MHz)	(S2) ±20 /6	max.	
0.1	±20%	10	25.2	0.02	2850	NLCV32T-R10M-PFRD
0.15	±20%	10	25.2	0.024	2600	NLCV32T-R15M-PFRD
0.22	±20%	10	25.2	0.027	2400	NLCV32T-R22M-PFRD
0.33	±20%	10	25.2	0.035	2100	NLCV32T-R33M-PFRD
0.47	±20%	10	25.2	0.038	2000	NLCV32T-R47M-PFRD
0.68	±20%	10	25.2	0.045	1900	NLCV32T-R68M-PFRD
_1	±20%	15	7.96	0.055	1700	NLCV32T-1R0M-PFRD
1.5	±20%	15	7.96	0.095	1400	NLCV32T-1R5M-PFRD
2.2	±20%	15	7.96	0.115	1200	NLCV32T-2R2M-PFRD
3.3	±20%	15	7.96	0.16	1000	NLCV32T-3R3M-PFRD
4.7	±20%	15	7.96	0.2	900	NLCV32T-4R7M-PFRD
6.8	±20%	15	7.96	0.29	700	NLCV32T-6R8M-PFRD
10	±10%	20	2.52	0.42	600	NLCV32T-100K-PFRD

^{*} Rated current: smaller value of either ldc1 or ldc2.

Idc1: When based on the inductance change rate (10% below the initial L value)

ldc2: When based on the temperature increase (Temperature increase of 40°C by self heating)

Measurement item	Product No.	Manufacturer
L, Q	4194A+16085A+16093B	Agilent Technologies
DC resistance	VP-2941A	Panasonic

^{*} Equivalent measurement equipment may be used.


[•] All specifications are subject to change without notice.

ATDK

NLCV-PFD series NLCV32-PFRD Type

ELECTRICAL CHARACTERISTICS

☐ L FREQUENCY CHARACTERISTICS GRAPH

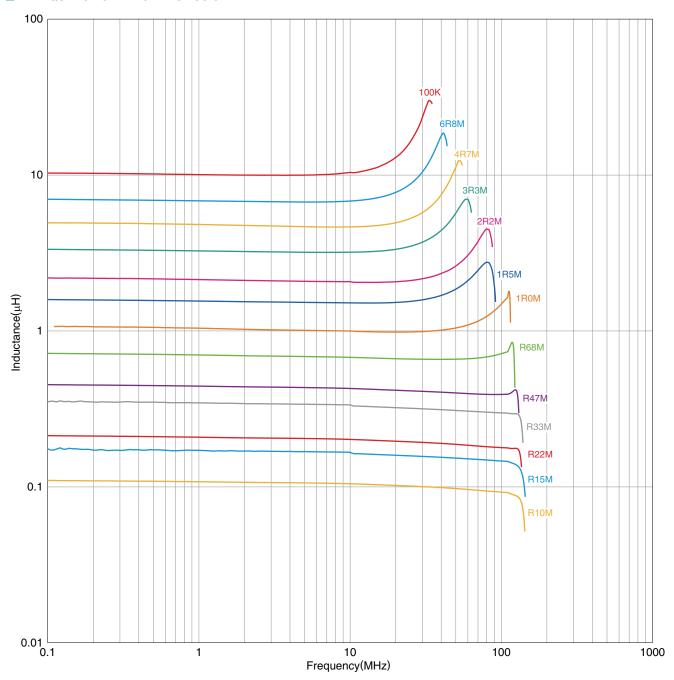

Product No.	Manufacturer
4294A	Agilent Technologies


^{*} Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



■ ELECTRICAL CHARACTERISTICS

☐ INDUCTANCE VS. DC BIAS CHARACTERISTICS GRAPH

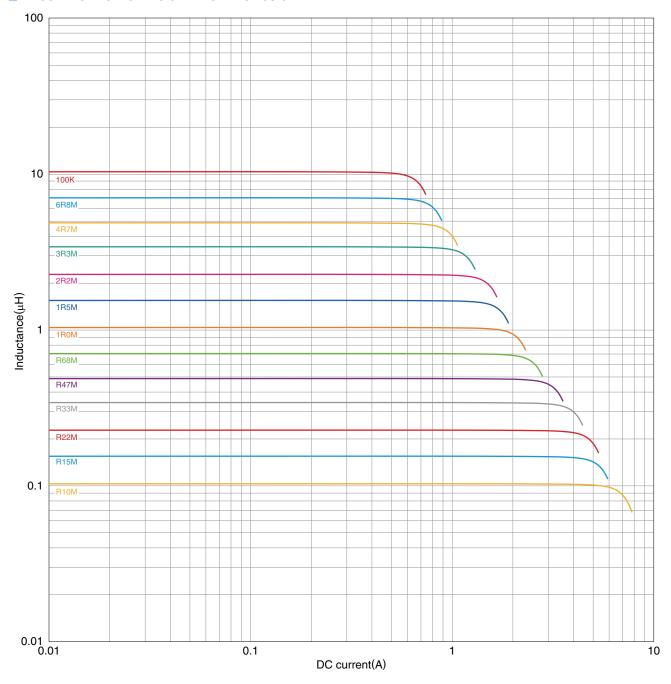

 $\bigcirc \ {\it Measurement equipment}$

Product No.	Manufacturer
4285A+42841A+42842C	Agilent Technologies

^{*} Equivalent measurement equipment may be used.


[•] All specifications are subject to change without notice.

公TDK

NLCV-PFD series NLCV32-PFRD Type

■ ELECTRICAL CHARACTERISTICS

□IMPEDANCE FREQUENCY CHARACTERISTICS GRAPH

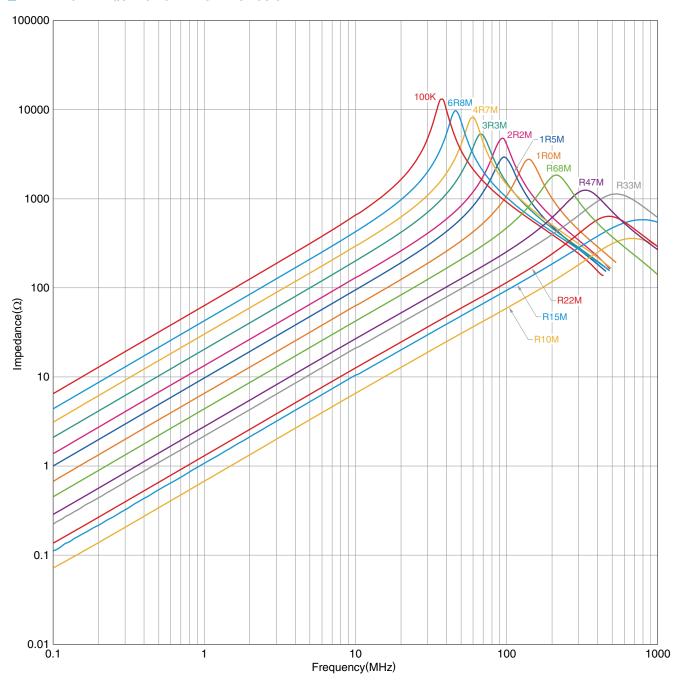

Product No.	Manufacturer
4294A	Agilent Technologies


st Equivalent measurement equipment may be used.

[•] All specifications are subject to change without notice.



Packaging Style


REEL DIMENSIONS



Type	Α	W1	W2	N	Е
NLCV25-PFD	ø180	9	13	ø60	0.5
NLCV32-PFD	ø180	9	13	ø60	0.5
NLCV25-PFRD	ø180	9	13	ø60	0.5
NLCV32-PFRD	ø180	9	13	ø60	0.5

^{*} These values are typical values.

TAPE DIMENSIONS





Туре	Α	В	øD0	Е	F	P0	P1	P2	W	K	t
NLCV25-PFD	2.3	2.7	1.5+0.1/-0	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.30	2	0.4
NLCV32-PFD	2.8	3.5	1.5+0.1/-0	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.30	2.3	0.4
NLCV25-PFRD	2.3	2.7	1.5+0.1/-0	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.30	2	0.4
NLCV32-PFRD	2.8	3.5	1.5+0.1/-0	1.75±0.1	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	8.00±0.30	2.3	0.4

[•] All specifications are subject to change without notice.