

# 2.5V Reference

### **FEATURES**

- Maximum Initial Tolerance: 0.2%
- Guaranteed Temperature Stability
- Maximum 0.6Ω Dynamic Impedance
- Wide Operating Current Range
- Directly Interchangeable with LM136 for Improved Performance
- No Adjustments Needed for Minimum Temperature Coefficient
- Available in 8-Lead SO and MSOP Packages and 3-Lead TO-92 Package

### **APPLICATIONS**

- Reference for 5V Systems
- 8-Bit A/D and D/A Reference
- Digital Voltmeters
- Current Loop Measurement and Control Systems
- Power Supply Monitor

### DESCRIPTION

The LT®1009 is a precision trimmed 2.5V shunt regulator diode featuring a maximum initial tolerance of only ±5mV. The low dynamic impedance and wide operating current range enhances its versatility. The 0.2% reference tolerance is achieved by on-chip trimming which not only minimizes the initial voltage tolerance but also minimizes the temperature drift.


Even though no adjustments are needed with the LT1009, a third terminal allows the reference voltage to be adjusted  $\pm 5\%$  to calibrate out system errors. In many applications, the LT1009 can be used as a pin-to-pin replacement of the LM136 and the external trim network eliminated.

For a lower drift 2.5V reference, see the LT1019 data sheet.


 $\mathcal{L}$ , LT, LTC and LTM are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

#### 2.5V Reference



### **Output Voltage**

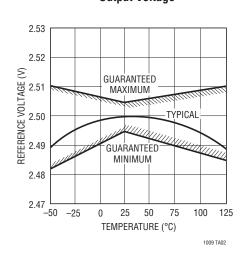


1009ff

# **ABSOLUTE MAXIMUM RATINGS** (Note 1)

Reverse Current	.20mA
Forward Current	.10mA
Storage Temperature Range65°C to	150°C
Lead Temperature (Soldering, 10 sec)	300°C

Operating Temperature Range	
LT1009/LT1009C	0°C to 70°C
LT1009I	40°C to 85°C
LT1009M ( <b>OBSOLETE</b> )	55°C to 125°C

# PIN CONFIGURATION

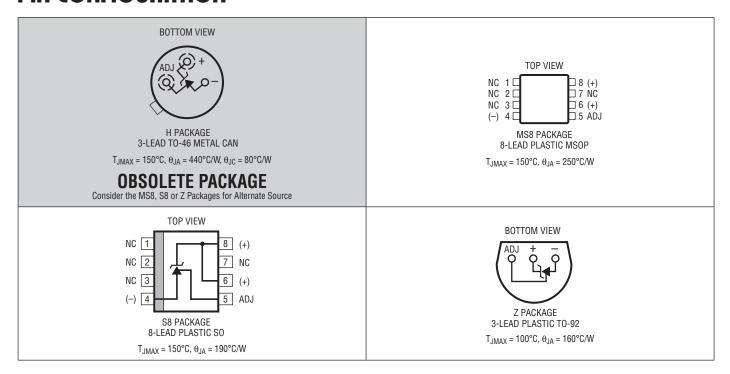

# ORDER INFORMATION

LEAD FREE FINISH	TAPE AND REEL	PART MARKING	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LT1009MH#PBF	LT1009MH#TRPBF		3-Lead TO-46 Metal Can	-55°C to 125°C
LT1009CH#PBF	LT1009CH#TRPBF		3-Lead TO-46 Metal Can	0°C to 70°C
LT1009CMS8#PBF	LT1009CMS8#TRPBF	LTQZ	8-Lead Plastic MSOP	0°C to 70°C
LT1009S8#PBF	LT1009S8#TRPBF	1009	8-Lead Plastic SO	0°C to 70°C
LT1009IS8#PBF	LT1009IS8#TRPBF	10091	8-Lead Plastic SO	-40°C to 85°C
LT1009CZ#PBF	LT1009CZ#TRPBF		3-Lead Plastic TO-92	0°C to 70°C
LT1009IZ#PBF	LT1009IZ#TRPBF		3-Lead Plastic TO-92	-40°C to 85°C

LINEAR

### ORDER INFORMATION

LEAD BASED FINISH	TAPE AND REEL	PART MARKING	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LT1009MH	LT1009MH#TR		3-Lead TO-46 Metal Can	−55°C to 125°C
LT1009CH	LT1009CH#TR		3-Lead TO-46 Metal Can	0°C to 70°C
LT1009CMS8	LT1009CMS8#TR	LTQZ	8-Lead Plastic MSOP	0°C to 70°C
LT1009S8	LT1009S8#TR	1009	8-Lead Plastic SO	0°C to 70°C
LT1009IS8	LT1009IS8#TR	10091	8-Lead Plastic SO	-40°C to 85°C
LT1009CZ	LT1009CZ#TR		3-Lead Plastic TO-92	0°C to 70°C
LT1009IZ	LT1009IZ#TR		3-Lead Plastic TO-92	-40°C to 85°C

Consult LTC Marketing for parts specified with wider operating temperature ranges.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/

For more information on tape and reel specifications, go to: http://www.linear.com/tapeandreel/

# **AVAILABLE OPTIONS**

		TEMPERATURE		PACKAG	E STYLE	
TEMPERATURE	ACCURACY (%)	COEFFICIENT (ppm/°C)	TO-46 (H) OBSOLETE	MSOP-8 (MS8)	\$0-8 (\$8)	T0-92 (Z)
0°C to 70°C	0.20 0.40	25 25	LT1009CH	LT1009CMS8	LT1009S8	LT1009CZ
-40°C to 85°C	0.20 0.40	35 35			LT1009IS8	LT1009IZ
−55°C to 125°C	0.20	35	LT1009MH			

# **ELECTRICAL CHARACTERISTICS** The $\bullet$ denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A=25\,^{\circ}C$ .

						LT100M			LT10091		LT10	09/LT10	009C	
SYMBOL	PARAMETER	CONDITIONS			MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNITS
$\overline{V_Z}$	Reverse Breakdown Voltage	$T_A = 25$ °C, $I_R = 1$ mA	H, Z Pkg MS, S Pkg		2.495	2.500	2.505	2.495 2.49	2.500 2.50	2.505 2.51	2.495 2.49	2.500 2.50	2.505 2.51	V
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Change with Current	$400\mu A \le I_R \le 10mA$		•		2.6 3.0	6 10		2.6 3.0	10 12		2.6 3.0	10 12	mV mV
r <sub>Z</sub>	Reverse Dynamic Impedance	I <sub>R</sub> = 1mA		•		0.2 0.4	0.6 1.0		0.2 0.4	1.0 1.4		0.2 0.4	1.0 1.4	Ω Ω
	Temperature Stability	$T_{MIN} \le T_A \le T_{MAX}$		•			15			15		1.8	4	mV
$\frac{\Delta V_Z}{\Delta Temp}$	Average Temperature Coefficient (Notes 2, 3)	$\begin{array}{l} 0^{\circ}C \leq T_{A} \leq 70^{\circ}C \\ -40^{\circ}C \leq T_{A} \leq 85^{\circ}C \\ -55^{\circ}C \leq T_{A} \leq 125^{\circ}C \end{array}$				15 25	25 35		15	25 35		15	25	ppm/°C ppm/°C ppm/°C
$\frac{\Delta V_Z}{\Delta Time}$	Long-Term Stability	$T_A = 25^{\circ}\text{C} \pm 0.1^{\circ}\text{C}, I_R$	= 1mA			20			20			20		ppm/kHr


**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.


Note 2: Guaranteed by Design.


**Note 3:** Average temperature coefficient is defined as the total voltage change divided by the specified temperature change.





# TYPICAL PERFORMANCE CHARACTERISTICS

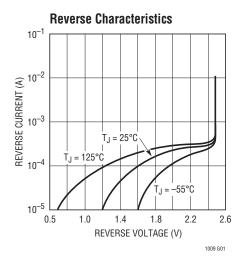


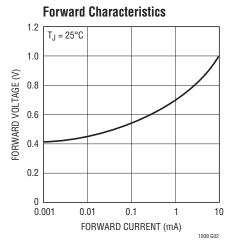

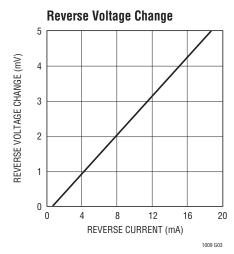






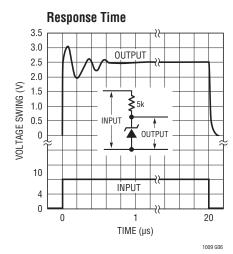


# **SCHEMATIC DIAGRAM**

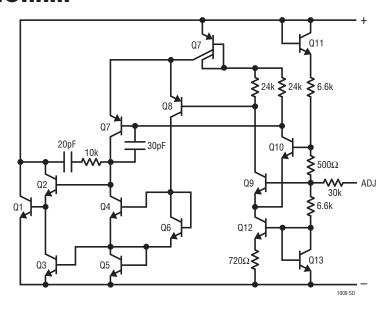


# TYPICAL APPLICATIONS


Wide Supply Range, Adjustable Reference



### **Low Temperature Coefficient Power Regulator**




Switchable ±1.25V Bipolar Reference

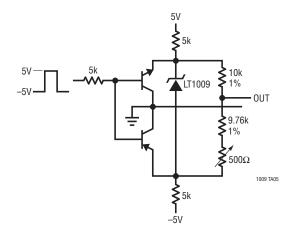


1009ff

### PACKAGE DESCRIPTION

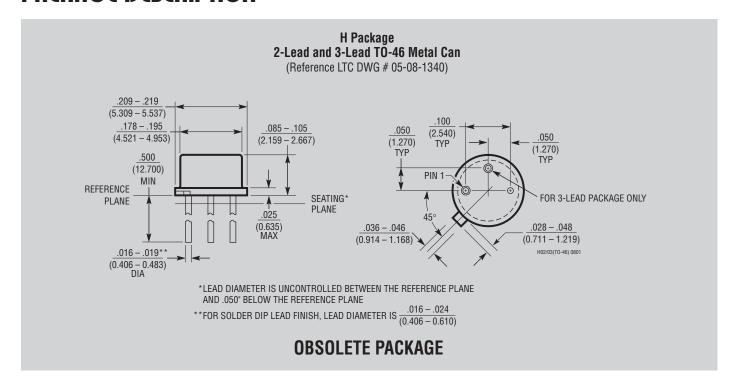

### MS8 Package 8-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1660)

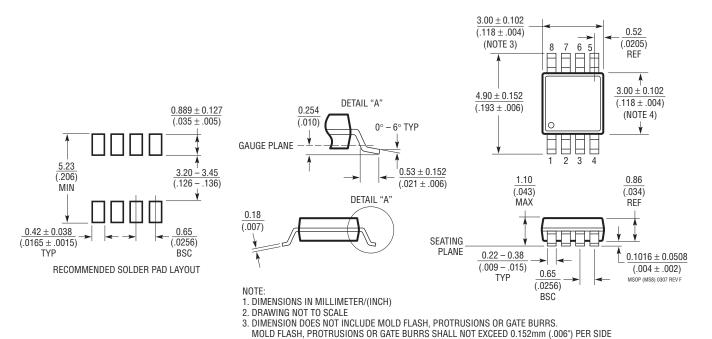

4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.


INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE 5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX

1009ff

### PACKAGE DESCRIPTION


#### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch)

(Reference LTC DWG # 05-08-1610)

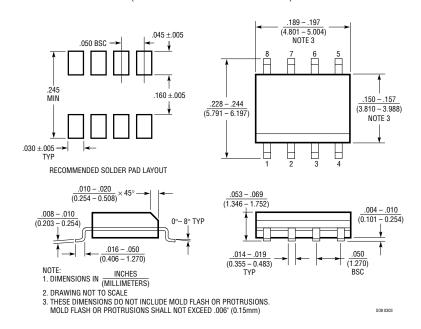

### Z Package 3-Lead Plastic TO-92 (Similar to TO-226)


(Reference LTC DWG # 05-08-1410)

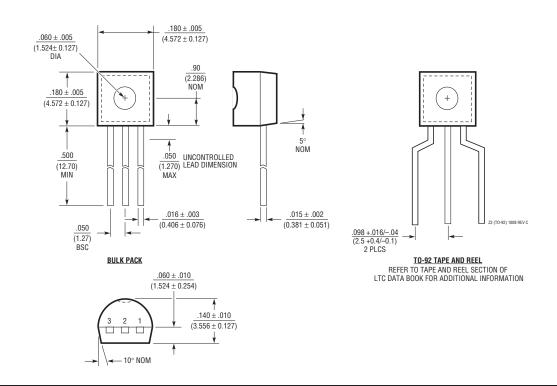



# TYPICAL APPLICATION

### Low Noise 2.5V Buffered Reference

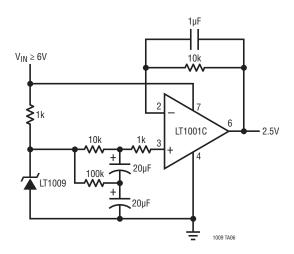

# **RELATED PARTS**

PART NUMBER	DESCRIPTION	COMMENTS
LT1019	Precision Series Reference	Bandgap, 0.05%, 5ppm/°C
LT1236	Precision Series Reference	5V and 10V Zener-Based 5ppm/°C, SO-8 Package
LTC®1798	Micropower Low Dropout Series Reference	0.15% Max, 6.5µA Supply Current
LT1460	Micropower Precision Series Reference	Bandgap, 130µA Supply Current 10ppm/°C, Available in SOT-23
LT1634	Micropower Precision Shunt Voltage Reference	Bandgap 0.05%, 10ppm/°C, 10µA Supply Current
LT1461	Micropower Precision Series Reference	0.04% Max, 3ppm/°C Max, 35μA Supply Current