

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees



2N4402



PNP General Purpose Amplifier

This device is designed for use as general purpose amplifiers and switches requiring collector currents to 500 mA.

Absolute Maximum Ratings*

TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CEO}	Collector-Emitter Voltage	40	V
V _{CBO}	Collector-Base Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5.0	V
Ic	Collector Current - Continuous	600	mA
T _J , T _{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

^{*}These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:

1) These ratings are based on a maximum junction temperature of 150 degrees C.

2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Thermal Characteristics

TA = 25°C unless otherwise noted

Symbol	Characteristic	Max	Units
		2N4402	-
P _D	Total Device Dissipation Derate above 25°C	625 5.0	mW mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	83.3	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	200	°C/W


PNP General Purpose Amplifier (continued)


Symbol	Parameter	Test Conditions	Min	Max	Units
OFF CHA	RACTERISTICS				
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage*	$I_C = 1.0 \text{ mA}, I_B = 0$	40		V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C = 100 \mu A, I_E = 0$	40		V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = 100 \mu A, I_C = 0$	5.0		V
I _{CEX}	Collector Cutoff Current	$V_{CE} = 35 \text{ V}, V_{EB} = 0.4 \text{ V}$		0.1	μΑ
BL	Base Cutoff Current	$V_{CE} = 35 \text{ V}, V_{EB} = 0.4 \text{ V}$		0.1	μΑ
ON CHAF	RACTERISTICS*				
h _{FE}	DC Current Gain	$V_{CE} = 1.0 \text{ V}, I_{C} = 1.0 \text{ mA}$	30		
		$V_{CE} = 1.0 \text{ V}, I_{C} = 10 \text{ mA}$ $V_{CE} = 2.0 \text{ V}, I_{C} = 150 \text{ mA}$	50 50	150	
		$V_{CE} = 2.0 \text{ V}, I_C = 130 \text{ mA}$ $V_{CE} = 2.0 \text{ V}, I_C = 500 \text{ mA}$	20	130	
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 150 mA, I _B = 15 mA		0.40	V
	_	$I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$		0.75	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 150 \text{ mA}, I_B = 15 \text{ mA}$	0.75	0.95	V
		$I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$		1.30	V
014411	JONAL GUADA OTERIOTIOS	I _C = 500 mA, I _B = 50 mA	<u> </u>	1.30	V
	IGNAL CHARACTERISTICS Output Capacitance				
C _{ob}	Output Capacitance	V _{CB} = 10 V, f = 140 kHz		8.5	pF
C _{ob}	Output Capacitance Input Capacitance	V _{CB} = 10 V, f = 140 kHz V _{EB} = 0.5 V, f = 140 kHz	15		
C _{ob}	Output Capacitance	V _{CB} = 10 V, f = 140 kHz	1.5	8.5	pF
C _{ob} C _{ib}	Output Capacitance Input Capacitance	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$	1.5	8.5	pF
Cob Cib Ofe	Output Capacitance Input Capacitance Small-Signal Current Gain	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$		8.5 30	pF
Cob Cib Ofe	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$	30	8.5 30 250	pF pF
Cob Cib Nfe Nfe Nie Nre	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$	30 0.75	8.5 30 250 7.5	pF pF
	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance Voltage Feedback Ratio	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$	30 0.75 0.10	8.5 30 250 7.5 8.0	pF pF kΩ x10 ⁻⁴
Cob Cib hte hte hie hre	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance Voltage Feedback Ratio	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$	30 0.75 0.10	8.5 30 250 7.5 8.0	pF pF kΩ x10 ⁻⁴
C _{ob} C _{ib} N _{fe} N _{fe} N _{ie} N _{re} N _{oe} SWITCHI	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance Voltage Feedback Ratio Output Admittance	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$	30 0.75 0.10	8.5 30 250 7.5 8.0	pF pF kΩ x10 ⁻⁴
Cob Cib Ofe Ofe Oic One SWITCHI	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance Voltage Feedback Ratio Output Admittance NG CHARACTERISTICS	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 1.0 \text{ kHz}$ $V_{CC} = 30 \text{ V}, I_{C} = 150 \text{ mA},$	30 0.75 0.10	8.5 30 250 7.5 8.0	pF pF kΩ x10 ⁻⁴ μmhos
Cob Cib hte hte hie hre	Output Capacitance Input Capacitance Small-Signal Current Gain Small-Signal Current Gain Input Impedance Voltage Feedback Ratio Output Admittance NG CHARACTERISTICS Delay Time	$V_{CB} = 10 \text{ V}, f = 140 \text{ kHz}$ $V_{EB} = 0.5 \text{ V}, f = 140 \text{ kHz}$ $I_{C} = 20 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 100 \text{ MHz}$ $I_{C} = 1.0 \text{ mA}, V_{CE} = 10 \text{ V},$ $f = 1.0 \text{ kHz}$	30 0.75 0.10	8.5 30 250 7.5 8.0 100	pF pF kΩ x10 ⁻⁴ μmho


^{*}Pulse Test: Pulse Width \leq 300 μ s, Duty Cycle \leq 2.0%


(continued)


Typical Characteristics
















(continued)

Typical Characteristics (continued)


Switching Times vs Collector Current




Turn On and Turn Off Times vs Collector Current



Rise Time vs Collector and Turn On Base Currents





Power Dissipation vs Ambient Temperature




(continued)

Typical Common Emitter Characteristics (f = 1.0kHz)







(continued)

Test Circuits

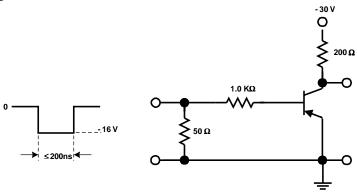


FIGURE 1: Saturated Turn-On Switching Time Test Circuit

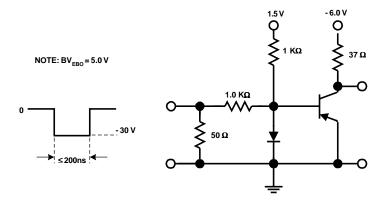


FIGURE 2: Saturated Turn-Off Switching Time Test Circuit

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

 $ACEx^{TM}$ FASTr™ PowerTrench® SyncFET™ Bottomless™ QFET™ TinyLogic™ GlobalOptoisolator™ QSTM UHC™ CoolFET™ GTO™ **VCX**TM $CROSSVOLT^{TM}$ QT Optoelectronics™ HiSeC™

DOMETM ISOPLANARTM Quiet SeriesTM

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. G

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hol

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Phone: 421 33 790 2910

Japan Customer Focus Center

Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com