

#### Is Now Part of



# ON Semiconductor®

# To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at <a href="www.onsemi.com">www.onsemi.com</a>. Please email any questions regarding the system integration to <a href="mailto:Fairchild\_questions@onsemi.com">Fairchild\_questions@onsemi.com</a>.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees



# **FAN1086**

# 1.5A Adjustable/Fixed Low Dropout Linear Regulator

#### **Features**

- · Low dropout voltage
- Load regulation: 0.05% typical
- · Trimmed current limit
- On-chip thermal limiting
- Standard SOT-223, TO-263, and TO-252 packages
- Three-terminal adjustable or fixed 2.5V, 2.85V, 3.3V, 5V

#### **Applications**

- · Active SCSI terminators
- · High efficiency linear regulators
- · Post regulators for switching supplies
- · Battery chargers
- 5V to 3.3V linear regulators
- · Motherboard clock supplies

#### **Description**


The FAN1086 and FAN1086-2.5, -2.85, -3.3 and -5 are low dropout three-terminal regulators with 1.5A output current capability. These devices have been optimized for low voltage where transient response and minimum input voltage are critical. The 2.85V version is designed specifically to be used in Active Terminators for SCSI bus.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limiting provides protection against any combination of overload and ambient temperatures that would create excessive junction temperatures.


Unlike PNP type regulators where up to 10% of the output current is wasted as quiescent current, the quiescent current of the FAN1086 flows into the load, increasing efficiency.

The FAN1086 series regulators are available in the industry-standard SOT-223, TO-263, and TO-252 power packages.

# **Typical Applications**

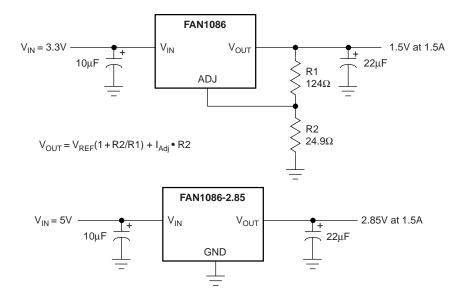

# **Pin Assignments**

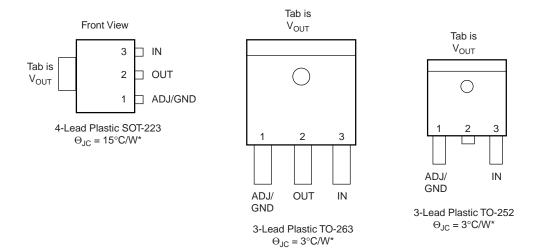

<sup>\*</sup>With package soldered to 0.5 square inch copper area over backside ground plane or internal power plane,  $\Theta_{JA}$  can vary from 30°C/W to more than 50°C/W. Other mounting techniques may provide better thermal resistance than 30°C/W.

# **Absolute Maximum Ratings**

Parameter	Min.	Max.	Unit
V <sub>IN</sub>		7.5	V
Operating Junction Temperature Range	0	125	°C
Storage Temperature Range	-65	150	°C
Lead Temperature (Soldering, 10 sec.)		300	°C

FAN1086 PRODUCT SPECIFICATION

#### **Electrical Characteristics**

Operating Conditions:  $V_{IN} \le 7V$ ,  $T_J = 25^{\circ}C$  unless otherwise specified.

The • denotes specifications which apply over the specified operating temperature range.

Parameter	Conditions		Min.	Тур.	Max.	Units
Reference Voltage <sup>3</sup> , V <sub>REF</sub>	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75V,$ $10mA \le I_{OUT} \le 1A$	•	1.225 (-2%)	1.250	1.275 (+2%)	V
Output Voltage	$ \begin{split} &10\text{mA} \leq I_{OUT} \leq 1\text{A} \\ &\text{FAN1086-2.5, } 4\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \\ &\text{FAN1086-2.85, } 4.35\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \\ &\text{FAN1086-3.3, } 4.8\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \\ &\text{FAN1086-5, } 6.5\text{V} \leq \text{V}_{\text{IN}} \leq 7\text{V} \end{split} $	•	2.450 2.793 3.234 4.900	2.5 2.85 3.3 5.0	2.550 2.907 3.366 5.100	V V V
Line Regulation <sup>1,2</sup>	$(V_{OUT} + 1.5V) \le V_{IN} \le 7V, I_{OUT} = 10mA$	•		0.005	0.2	%
Load Regulation <sup>1,2</sup>	$(V_{IN} - V_{OUT}) = 2V$ , $10mA \le I_{OUT} \le 1A$	•		0.05	0.5	%
Dropout Voltage	$\Delta V_{REF} = 1\%$ , $I_{OUT} = 1.5A$	•		1.300	1.500	V
Current Limit	$(V_{IN} - V_{OUT}) = 2V$	•	1.6	2.0		Α
Adjust Pin Current <sup>3</sup> , I <sub>Adj</sub>		•		35	120	μΑ
Adjust Pin Current Change <sup>3</sup>	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75,$ $10mA \le I_{OUT} \le 1A$	•		0.2	5	μΑ
Minimum Load Current	$1.5V \le (V_{IN} - V_{OUT}) \le 5.75$	•	10			mA
Quiescent Current	$V_{IN} = V_{OUT} + 1.25V$	•		4	13	mA
Ripple Rejection	$f = 120$ Hz, $C_{OUT} = 22\mu$ F Tantalum, $(V_{IN} - V_{OUT}) = 3V$ , $I_{OUT} = 1.5$ A		60	72		dB
Thermal Regulation	T <sub>A</sub> = 25°C, 30ms pulse			0.004	0.02	%/W
Temperature Stability		•		0.5		%
Long-Term Stability	T <sub>A</sub> = 125°C, 1000hrs.			0.03	1.0	%
RMS Output Noise (% of V <sub>OUT</sub> )	$T_A = 25^{\circ}C, 10Hz \le f \le 10kHz$			0.003		%
Thermal Resistance,	SOT-223			15		°C/W
Juncation to Case	TO-263, TO-252			3		°C/W
Thermal Shutdown	Junction Temperature			155		°C
Thermal Shutdown Hysteresis				10		°C

#### Notes:

- 1. See thermal regulation specifications for changes in output voltage due to heating effects. Load and line regulation are measured at a constant junction temperature by low duty cycle pulse testing.
- 2. Line and load regulation are guaranteed up to the maximum power dissipation. Power dissipation is determined by input/output differential and the output current. Guaranteed maximum output power will not be available over the full input/output voltage range.

3. FAN1086 only.

### **Typical Performance Characteristics**




Figure 1. Dropout Voltage vs. Output Current




Figure 3. Reference Voltage vs. Temperature




Figure 5. Minimum Load Current vs. Temperature




Figure 2. Load Regulation vs. Temperature




Figure 4. Output Voltage vs. Temperature




Figure 6. Adjust Pin Current vs. Temperature

FAN1086 PRODUCT SPECIFICATION

# **Typical Performance Characteristics** (continued)




Figure 7. Short-Circuit Current vs. Temperature




Figure 8. Ripple Rejection vs. Frequency




Figure 9. Maximum Power Dissipation




Figure 11. Stability Region (SOA) vs. ESR of the  $\mathbf{C}_{\text{OUT}}$ 


#### **Mechanical Dimensions**


### 3-Lead TO-263 Package


Symbol	Inches		Millimeters		Notes
Symbol	Min.	Max.	Min.	Max.	Notes
А	.160	.190	4.06	4.83	
b	.020	.036	0.51	0.91	
b2	.049	.051	1.25	1.30	
c2	.045	.055	1.14	1.40	
D	.340	.380	8.64	9.65	
E	.380	.405	9.65	10.29	
е	.100 BSC		2.54 BSC		
L	.575	.625	14.61	15.88	
L1	.090	.110	2.29	2.79	
L2	_	.055	_	1.40	
R	.017	.019	0.43	0.78	
α	0°	8°	0°	8°	

#### Notes:

- 1. Dimensions are exclusive of mold flash and metal burrs.
- 2. Standoff-height is measured from lead tip with ref. to Datum -B-.
- 3. Foot length is measured with ref. to Datum -A- with lead surface (at inner R).
- 4. Dimensiuon exclusive of dambar protrusion or intrusion.5. Formed leads to be planar with respect to one another at seating








FAN1086 PRODUCT SPECIFICATION

# **Mechanical Dimensions**

# 4-Lead SOT-223 Package

Cumbal	Inches		Millimeters		Natas	
Symbol	Min.	Max.	Min.	Max.	Notes	
Α	_	.071	_	1.80		
A1		.181	_	4.80		
В	.025	.033	.640	.840		
С	_	.090	_	2.29		
D	.248	.264	6.30	6.71		
Е	.130	.148	3.30	3.71		
е	.115	.124	2.95	3.15		
F	.033	.041	.840	1.04		
Н	.264	.287	6.71	7.29		
I	.012	_	.310	_		
J	_	10°	_	10°		
K	10°	16°	10°	16°		
L	.0008	.0040	.0203	.1018		
М	10°	16°	10°	16°		
N	.010	.014	.250	.360		

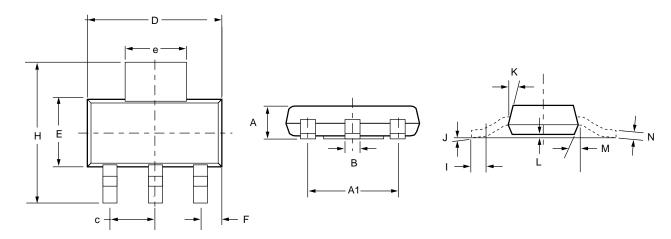


#### **Mechanical Dimensions**


#### 3-Lead TO-252 Package


lustras Millionatana					
Symbol	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
Α	.086	.094	2.19	2.39	
b	.025	.035	0.64	0.89	
b2	.030	.045	0.76	1.14	
b3	.205	.215	5.21	5.46	4
С	.018	.024	0.46	0.61	
c2	.018	.023	0.46	0.58	
D	.210	.245	5.33	6.22	1
Е	.250	.265	6.35	6.73	1
е	.090	BSC	2.29 BSC		
Н	.370	.410	9.40	10.41	
L	.055	.070	1.40	1.78	3
L1	.108 REF		2.74 REF		
L3	.035	.080	0.89	2.03	4
L4	.025	.040	0.64	1.02	

#### Notes:

- 1. Dimensions are exclusive of mold flash and metal burrs.
- 2. Stand off-height is measured from lead tip with ref. to Datum -B-.
- 3. Foot length is measured with ref. to Datum -A- with lead surface.
- 4. Thermal pad contour optional within dimensions b3 and L3
- 5. Formed leads to be planar with respect to one another at seating plane -C-.
- 6. Dimensions and tolerances per ASME Y14.5M-1994.







### **Ordering Information**

Product Number	Package
FAN1086DX	TO-252
FAN1086MX	TO-263
FAN1086SX	SOT-223
FAN1086D25X	TO-252
FAN1086M25X	TO-263
FAN1086S25X	SOT-223
FAN1086D285X	TO-252
FAN1086M285X	TO-263
FAN1086S285X	SOT-223
FAN1086D33X	TO-252
FAN1086M33X	TO-263
FAN1086S33X	SOT-223
FAN1086D5X	TO-252
FAN1086M5X	TO-263
FAN1086S5X	SOT-223

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

www.onsemi.com