

TPR 700

700 Watts, 50 Volts, Pulsed Avionics 1030 – 1090 MHz

GENERAL DESCRIPTION

The TPR 700 is a high power COMMON BASE bipolar transistor. It is designed for pulsed systems in the frequency band 1030-1090 MHz. The device has gold thin-film metallization for proven highest MTTF. The transistor includes input returns for **fast rise time**. Low thermal resistance package reduces junction temperature, extends life.

CASE OUTLINE 55KT, Style 1 Common Base


ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C² 2050 Watts

Maximum Voltage and Current

BVces Collector to Base Voltage 65 Volts
BVebo Emitter to Base Voltage 3.5 Volts
Ic Collector Current 55 Amps
Maximum Temperatures

Storage Temperature $- 65 \text{ to} + 200^{\circ}\text{C}$ Operating Junction Temperature $+ 200^{\circ}\text{C}$



ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout Pin Pg hc tr VSWR	Power Out Power Input Power Gain Collector Efficiency Rise Time Load Mismatch Tolerance	F = 1030 MHz Vcc = 50 Volts PW = 10 µsec DF = 1% F = 1030 MHz	700 6.7	35	150 70 30:1	Watts Watts dB % ns

BVebo ³ BVces h _{FE}	Emitter to Base Breakdown Collector to Emitter Breakdown DC - Current Gain Thermal Resistance	Ie = 50mA Ic = 100mA Ic = 1000mA, Vce = 5 V	3.5 65 10	0.08	Volts Volts °C/W
$\mathbf{q}\mathbf{j}\mathbf{c}^2$	Thermal Resistance			0.08	°C/W


Note 1: At rated output power and pulse conditions

2: At rated pulse conditions


3: Cannot measure due to input return

Rev A. – Sept 2005

Advanced Power Technology reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.advancedpower.com or contact our factory direct.

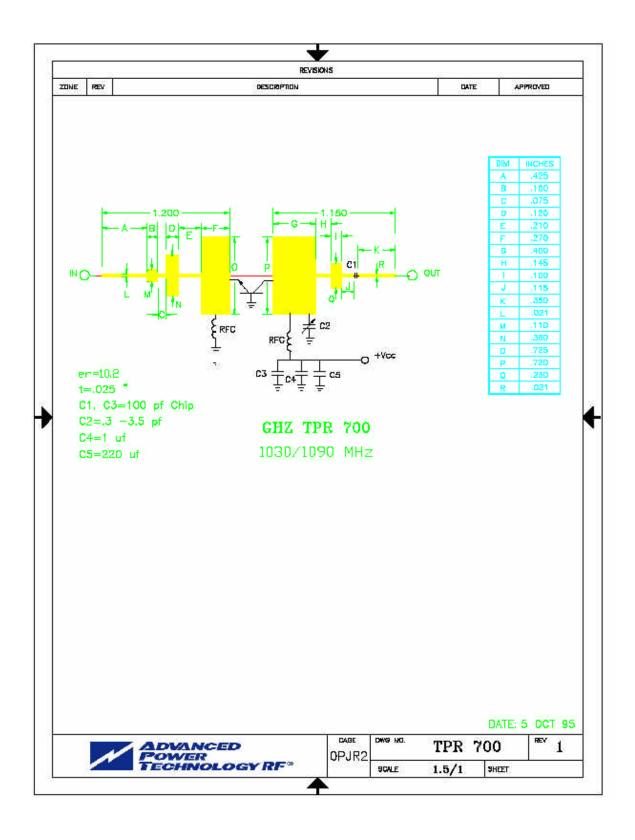

Advanced Power Technology reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.advancedpower.com or contact our factory direct.

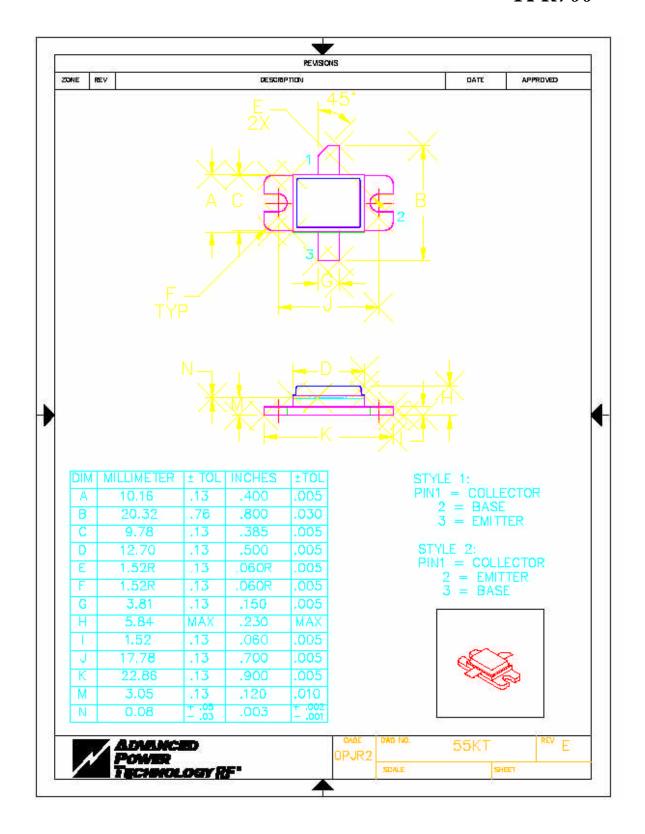

Advanced Power Technology reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.advancedpower.com or contact our factory direct.