


KEMET, FLLD4-TH, EMI/RFI Filters, Noise Suppression, 530 VAC, 200 A, 280x140x170mm

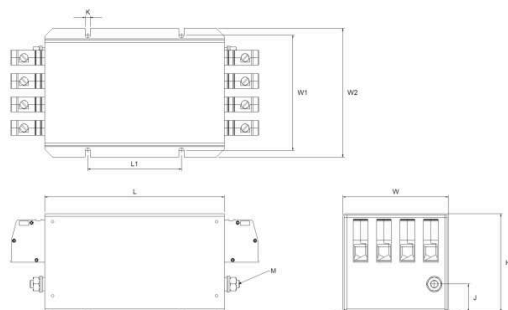

General Information	
Series:	FLLD4-TH
Style:	Chassis Mount
Description:	EMI Filter, Classis Mount, Compact
Features:	High Performance
Phase:	Three-phase + Neutral
RoHS:	Yes
Qualifications:	IEC/EN 60939
Terminal Type:	Terminal Block

Dimensions	
L	280mm NOM
W	140mm NOM
H	170mm NOM
L1	230mm NOM
W1	153.5mm NOM
W2	170mm NOM
J	50mm NOM
K	6.5mm NOM
M (Earth)	Threaded Studs M10

Specifications	
Voltage AC:	530 VAC
Rated Frequency:	50-60 Hz
Rated Current:	200 A (50°C)
Rated Temperature:	50°C
Temperature Range:	-25/+100°C
Climate Category:	25/100/21
Test Voltage DC (P to P):	2250 VDC
Test Voltage DC (P to E):	3000 VDC
Power Loss:	45 W (25°C 50 Hz)
Leakage Current:	11 mA

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	1
Component Weight:	6.1 kg

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.