## SMD / SMT Inductors (Coils) VLF302512MT-100M-CA

Applications	Automotive Grade
Feature	Wire Wound Wire Wound
	Shield Magnetic Shield
	Ferrite Core
Series   Type	VLF-M
Status	A Obsolete
	Recommended Alternate Part No. : <u>VLS5045EX-100M-H</u> (Interchangeability is not
	guaranteed.)
	Discontinue Issue Date : May.18, 2017
	Last Purchase Order Date : Mar.31, 2021
	Last Shipment Date : Sep.30, 2021
Brand	TDK


Size		
Length(L)	3.00mm ±0.20mm	
Width(W)	2.50mm ±0.20mm	
Thickness   Height	1.20mm Max.	
Recommended Land Pattern (A)	0.90mm Nom.	
Recommended Land Pattern (B)	0.80mm Nom.	
Recommended Land Pattern (C)	1.45mm Nom.	


Electrical Characteristics				
Inductance	10µH ±20% at 1MHz			
Rated Current (L Change) [Typ.]	690mA (30% Down)			
Rated Current (L Change) [Max.]	620mA (30% Down)			
Rated Current (Temperature Rise) [Typ.]	950mA (40°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	249mΩ			
DC Resistance [Max.]	299mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C	
Soldering Method	Reflow	
AEC-Q200	NO	
Packing	Embossed (Plastic)Taping [180mm Reel]	
Himages are for reference only and show exemplary products. Package Duantity I This PDF document was created based on the data listed on the TDK Corporation websit	2000pcs	
Weight are subject to change without notice.	0.033g	


Copyright(c) TDK Corporation. All rights reserved. Downloaded from Arrow.com.


## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

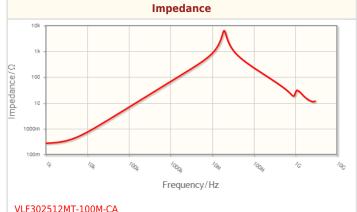

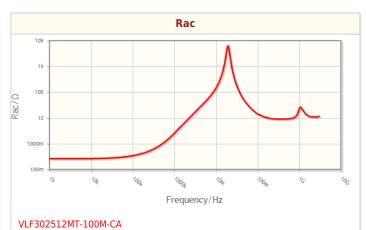



VLF302512MT-100M-CA

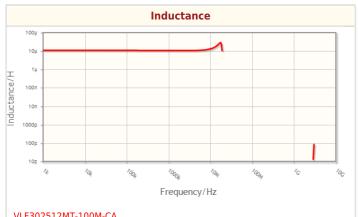

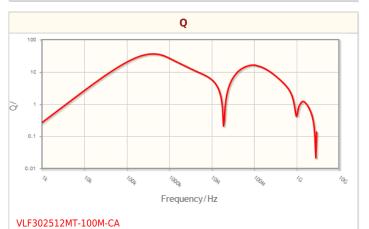

VLF302512MT-100M-CA

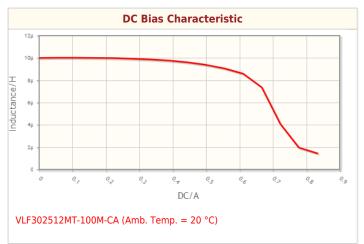

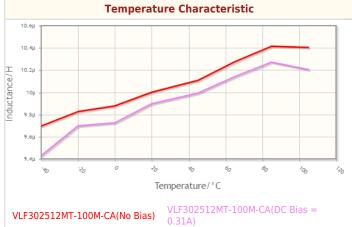


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

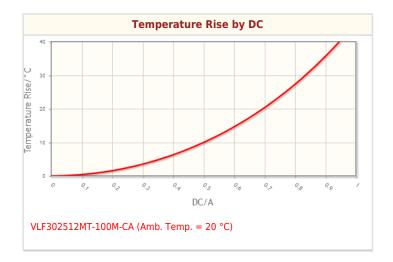


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

## Associated Images

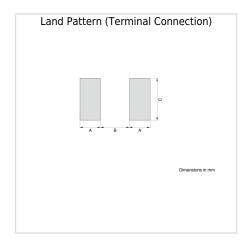

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

 $! \ \mbox{All specifications} \ \mbox{are subject to change without notice}.$