

# 共模滤波器/扼流圈

ACT1210D-101-2P-TL00

新产品

RoHS Reach Halogen Free Pb Free

用途	车载等级
特点	<div style="border: 1px solid black; padding: 2px;">Wire Wound</div> 绕线 <div style="border: 1px solid black; padding: 2px;">AEC-Q200</div> AEC-Q200 <div style="border: 1px solid black; padding: 2px;">Signal</div> 一般信号线
系列	ACT
状态	量产体制
品牌	TDK



## 尺寸

长度(L)	3.20mm ±0.20mm
宽度(W)	2.50mm ±0.20mm
厚度   高低	2.50mm Max.

## 电气特性

共模阻抗 [Typ. ]	3.8kΩ at 10MHz (参考)
共模阻抗 [Min. ]	
共模电感	100 μH +50, -30% at 100kHz
额定电流	115mA
额定电压	80VDC
绝缘电阻 [Min. ]	10MΩ
直流电阻	3Ω Max.

## 其他

使用温度范围	-40~150° C
焊接方法	回流 烙铁焊接
AEC-Q200	YES
包装形式	塑封编带 (330mm卷筒、带宽 12mm)
包装个数	6000pcs
重量	0.075g

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

共模滤波器/扼流圈

ACT1210D-101-2P-TL00

新产品

RoHS Reach Halogen Free Pb Free

---

特性图表 (这是参考数据，并不保证产品的特性。)




共模滤波器/扼流圈

ACT1210D-101-2P-TL00

新产品

RoHS Reach Halogen Free Pb Free

Associated Images

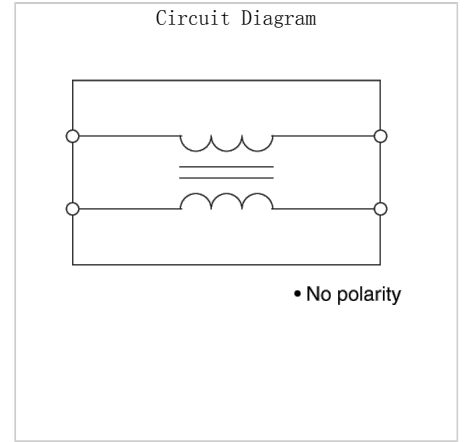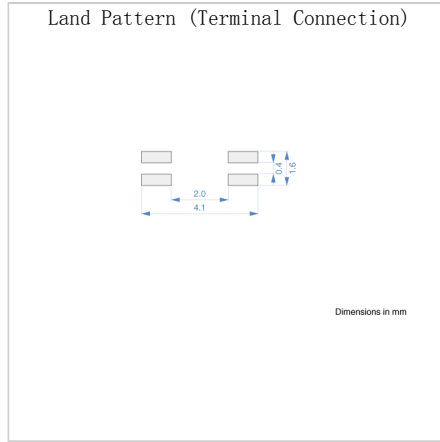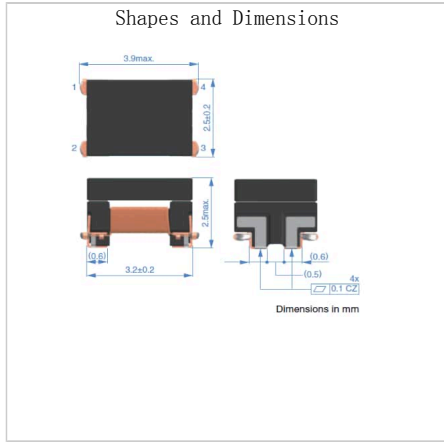

! Images are for reference only and show exemplary products.  
 ! This PDF document was created based on the data listed on the TDK Corporation website.  
 ! All specifications are subject to change without notice.