

Chip Monolithic Ceramic Capacitor

**Electrical Characteristics Data**

**0201 X5R 10nF 25V (0201X103M250CT)**

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @25V, 120sec)

Item	Spec
Cap [nF]	10(±20%)
DF	≤ 5%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4991B)

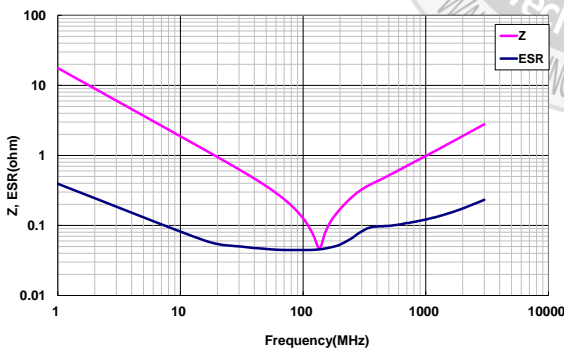

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

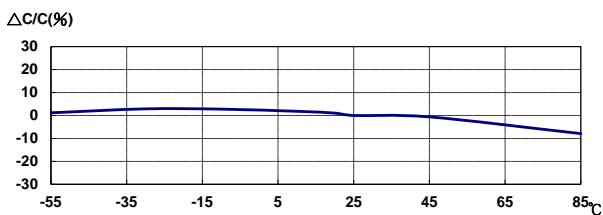

5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A; DC charge 60±5sec)

12.5V : -42.58% ; 25V : -76.35%

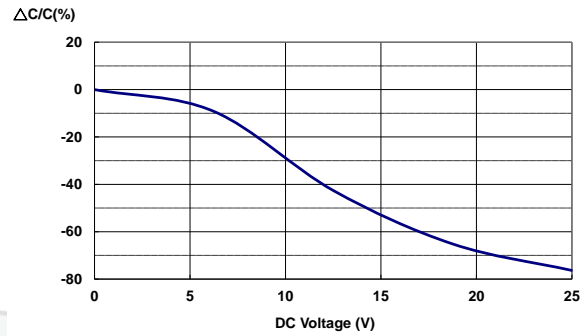

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

