


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0402 X7R 10nF 50V(0402B103M500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [nF]	10(±20%)
DF	≤ 2.5%
IR [G-ohm]	≥ 10


3. Impedance/ESR-Frequency

(Equipment: 4990A)

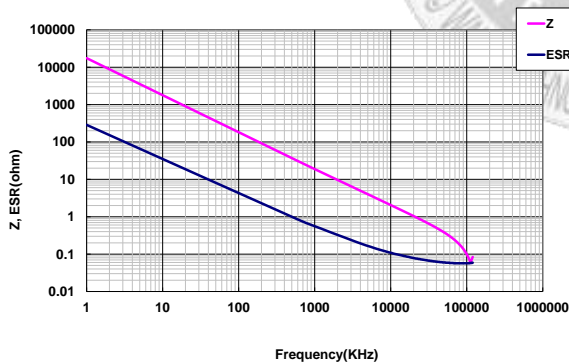

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

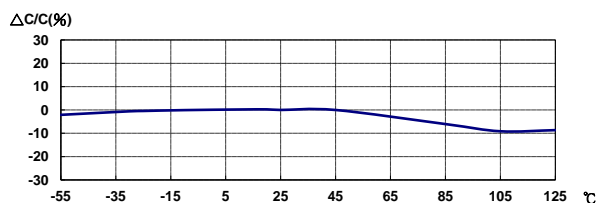


5. Capacitance – DC Voltage Characteristics

(Equipment: E4980A+B1505A+N1259A)

(DC charge 60±5sec)

25V : -31.43% ; 50V : -65.63%

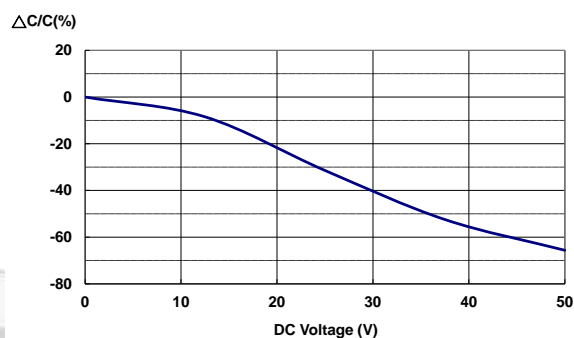

6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

