


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 33nF 16V(0402B333M160CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @ 25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 16V, 120sec)

Item	Spec
Cap [nF]	33(±20%)
DF	≤ 5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4991B)

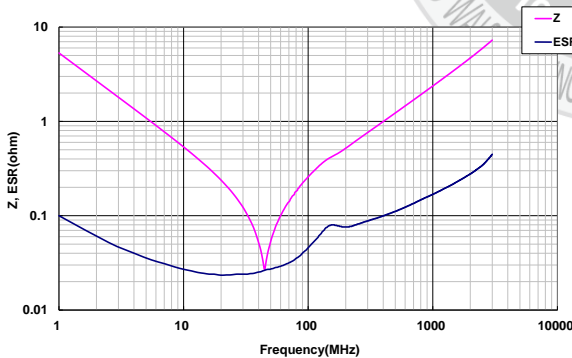

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

8V : -7.17% ; 16V : -34.90%

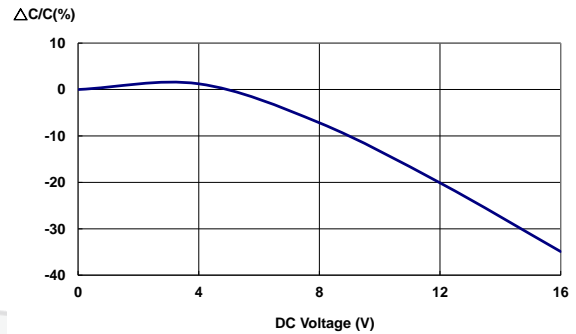


6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

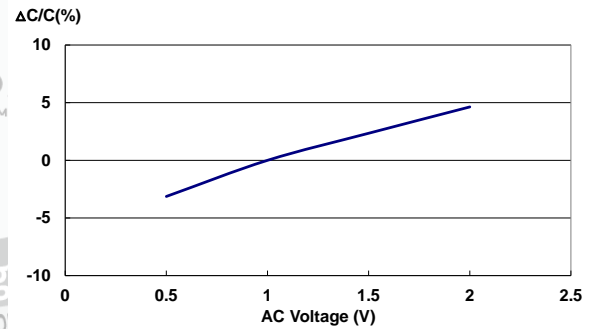

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

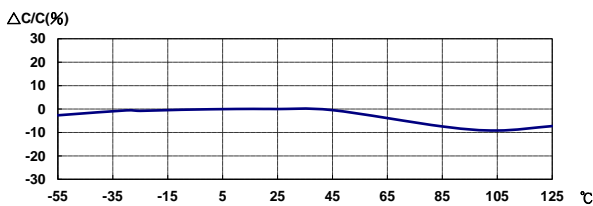

Last updated : 2020/10/12