


Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0402 X7R 820pF 50V(0402B821K500CT)

#### 1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


#### 2. Cap, DF, IR @25°C

(Cap, DF @1MHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [pF]	820(±10%)
DF	≤2.5%
IR [G-ohm]	≥10


#### 3. Impedance/ESR-Frequency

(Equipment: 4287A)

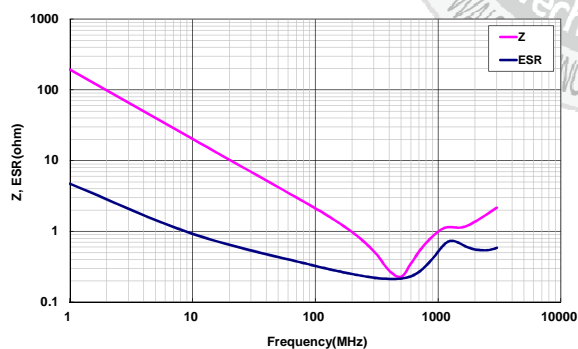

#### 4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

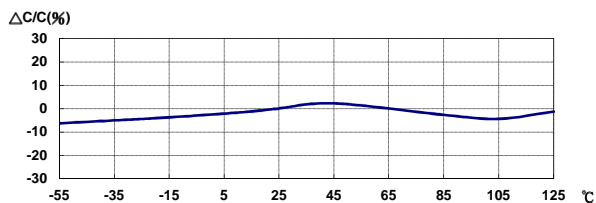


#### 5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A+B1505A+N1259A)

(DC charge 60±5sec)

25V : -3.04% ; 50V : -13.30%

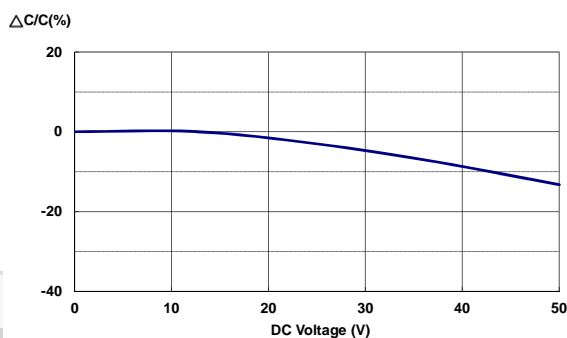

#### 6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

