

Chip Monolithic Ceramic Capacitor

## Electrical Characteristics Data

### 0603 X5R 3.3uF 6.3V (0603X335K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0603 (1608)	1.60+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @6.3V, 120sec)

Item	Spec
Cap [uF]	3.3(±10%)
DF	≤ 10%
IR [G-ohm]	≥ 0.0303


3. Impedance/ESR-Frequency

(Equipment: 4294A)

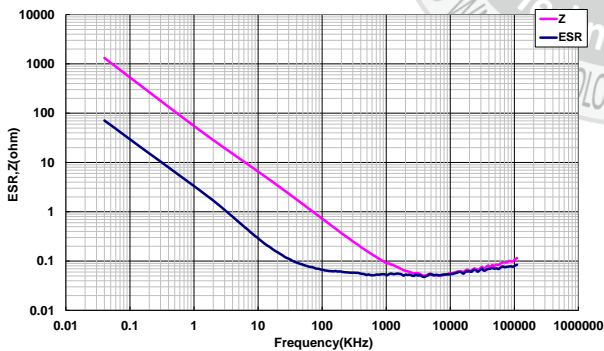


4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

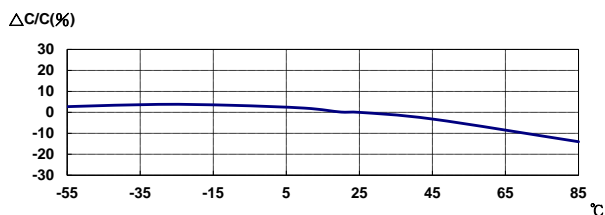

5. Temperature Rise – Ripple Current


(Equipment: 11810)

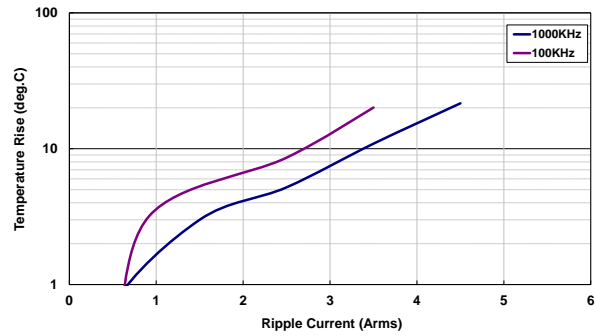

6. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

3.15V:-24.74% ; 6.3V:-56.53%

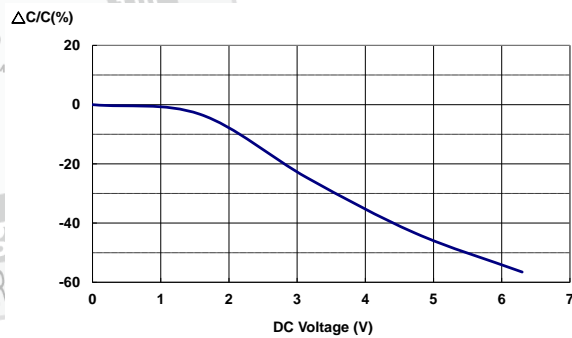

7. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

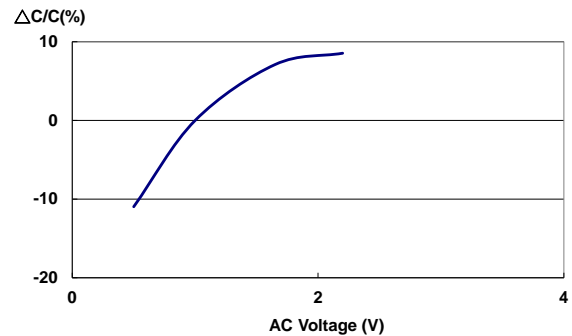

Last updated : 2019/11/12