

PLASTIC SILICON RECTIFIERS


**REVERSE VOLTAGE – 50 to 1000 Volts
FORWARD CURRENT – 1.5 Amperes**

FEATURES

- Low cost
- Diffused junction
- Low forward voltage drop
- Low reverse leakage current
- High current capability

MECHANICAL DATA

- Case: JEDEC DO-15, molding compound has UL flammability classification 94V-0
- Polarity : Color band denotes cathode
- Weight : 0.015 ounces, 0.4 grams
- Mounting position : Any

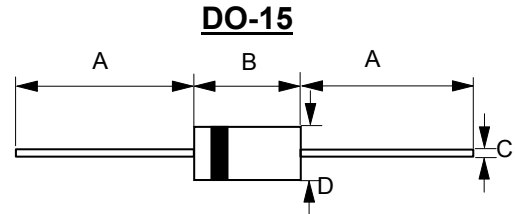

| DO-15 | | |
|-----------------------------|--------|--------|
| DIM | MIN | MAX |
| A | 25.4 | -- |
| B | 5.80 | 7.60 |
| C | 0.71 Ø | 0.86 Ø |
| D | 2.60 Ø | 3.60 Ø |
| All dimension in millimeter | | |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

| PARAMETER | SYMBOL | 1N5391 | 1N5392 | 1N5393 | 1N5394 | 1N5395 | 1N5396 | 1N5397 | 1N5398 | 1N5399 | UNIT |
|--|------------|-------------|--------|--------|--------|--------|--------|--------|--------|--------|------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | V |
| Average rectified output current per device @ $T_L = 70^\circ C$ | $I_{(AV)}$ | 1.5 | | | | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load $T_J = 25^\circ C$ | I_{FSM} | 50 | | | | | | | | | A |
| Peak forward surge current 1ms single half sine-wave superimposed on rated load $T_J = 25^\circ C$ | I_{FSM} | 100 | | | | | | | | | A |
| $I^2 t$ rating for fusing ($t = 8.3ms$) | $I^2 t$ | 10.4 | | | | | | | | | A ² S |
| Operating temperature range | T_J | -55 to +125 | | | | | | | | | °C |
| Storage temperature range | T_{STG} | -55 to +150 | | | | | | | | | °C |

STATIC ELECTRICAL CHARACTERISTICS

| PARAMETER | TEST CONDITION | SYMBOL | MAX. | UNIT |
|---------------------------------------|--|--------|-----------|---------|
| Forward voltage | $I_F = 1.5A$ $T_J = 25^\circ C$ | V_F | 1.1 | V |
| Leakage current | V_R at rated $T_J = 25^\circ C$ $T_J = 100^\circ C$ | I_R | 5.0 50 | μA |
| Typical junction capacitance (Note 1) | | C_J | 20 | pF |

THERMAL CHARACTERISTICS

| PARAMETER | SYMBOL | TYP. | UNIT |
|-----------------------------|------------|------|------|
| Thermal resistance (Note 2) | R_{thJL} | 26 | °C/W |

Note :

- (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC
- (2) Thermal resistance junction to lead

REV. 7, MAY-2015, KDAD01

Please be aware that an **Important Notice and Disclaimer** concerning availability, disclaimers, and use in critical applications of LSC products thereto appears at the end of this Data Sheet.

RATING AND CHARACTERISTIC CURVES
1N5391 thru 1N5399



FIG.1- FORWARD CURRENT DERATING CURVE

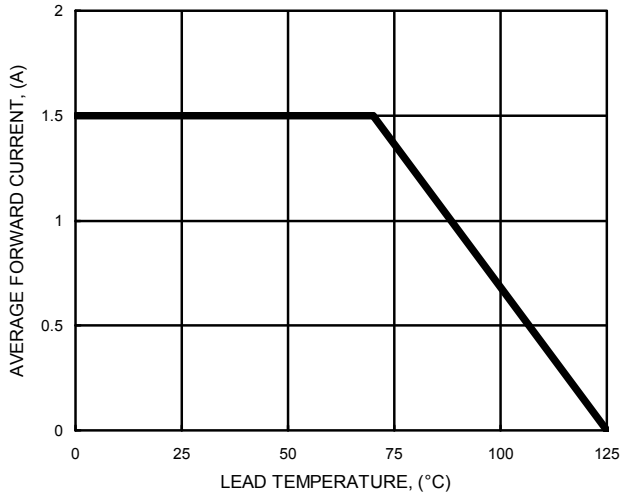


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

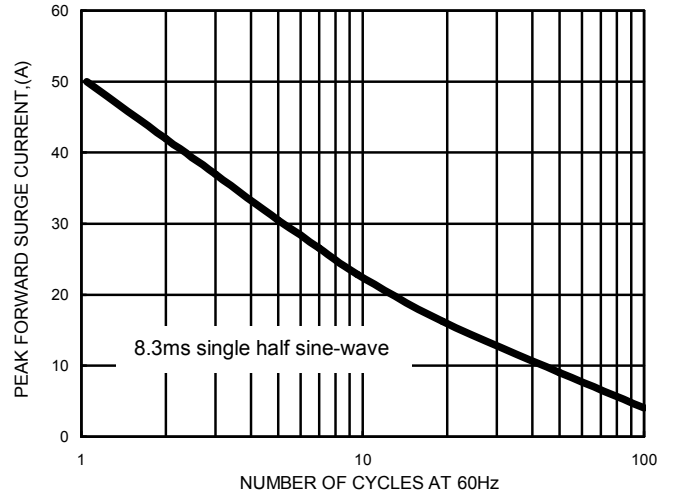


FIG.3- TYPICAL FORWARD CHARACTERISTICS


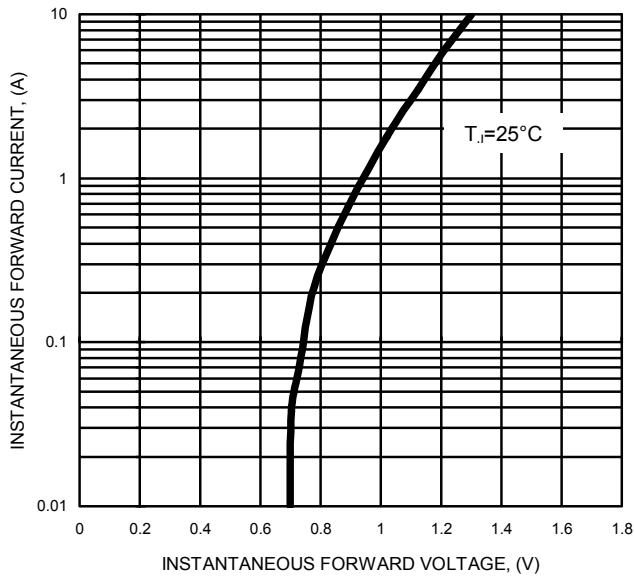


FIG.4- TYPICAL JUNCTION CAPACITANCE

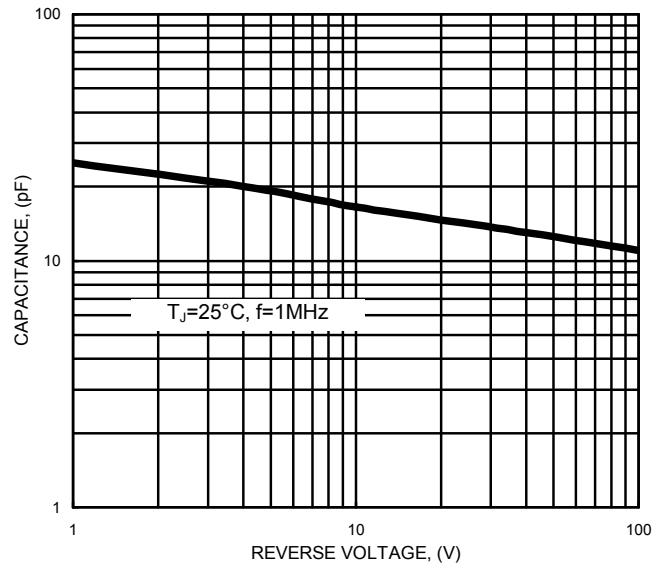

IMPORTANT NOTICE AND DISCLAIMER

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design purchase or use.

ALL INFORMATION ARE PROVIDED AS-IS, EVEN IT HAS QUALIFIED BY THE AEC-Q101 WHICH SATISFY INDUSTRIAL APPLICATION REQUIREMENT, EXCEPT AS EXPRESSLY STATED IN THIS DATA SHEET IS APPLIED FOR AUTOMOTIVE GRADE, LSC MAKE NO WARRANTIES, REPRESENTATION OR GUARANTEE, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, REGARDING ANY MERCHANTABILITY, SATISFACTORY QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE LSC TECHNOLOGY.

LSC DOES NOT ASSUME ANY LIABILITY OR COMPENSATION FOR ANY APPLICATION ASSISTANCE OR CUSTOMER PRODUCT DESIGN, AND MAKE NO WARRANTY OR ACCEPT ANY LIABILITY WITH PRODUCTS, WHICH ARE PURCHASED OR USED FOR ANY UNINTENDED OR UNAUTHORIZED APPLICATION.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.