

# International Rectifier


- RoHS Compliant Containing No Lead and Halogen Free ①
- Integrated Monolithic Schottky Diode
- Low Profile (<0.7 mm)
- Dual Sided Cooling Compatible ①
- Ultra Low Package Inductance
- Optimized for High Frequency Switching ①
- Ideal for CPU Core DC-DC Converters
- Optimized for Sync. FET socket of Sync. Buck Converter ①
- Low Conduction and Switching Losses
- Compatible with existing Surface Mount Techniques ①
- 100% R<sub>g</sub> tested

# IRF6795MPbF IRF6795MTRPbF

HEXFET® Power MOSFET plus Schottky Diode ②

Typical values (unless otherwise specified)

V <sub>DSS</sub>	V <sub>GS</sub>	R <sub>DS(on)</sub>	R <sub>DS(on)</sub>		
25V max	±20V max	1.4mΩ@ 10V	2.4mΩ@ 4.5V		
Q <sub>g tot</sub>	Q <sub>gd</sub>	Q <sub>gs2</sub>	Q <sub>rr</sub>	Q <sub>oss</sub>	V <sub>gs(th)</sub>
35nC	10nC	4.8nC	34nC	27nC	1.8V



Applicable DirectFET Outline and Substrate Outline (see p.7,8 for details) ①

SQ	SX	ST	MQ	MX	MT	MP		
----	----	----	----	----	----	----	--	--

## Description

The IRF6795MPbF combines the latest HEXFET® Power MOSFET Silicon technology with the advanced DirectFET™ packaging to achieve the lowest on-state resistance in a package that has the footprint of a SO-8 and only 0.7 mm profile. The DirectFET package is compatible with existing layout geometries used in power applications, PCB assembly equipment and vapor phase, infra-red or convection soldering techniques. Application note AN-1035 is followed regarding the manufacturing methods and processes. The DirectFET package allows dual sided cooling to maximize thermal transfer in power systems, improving previous best thermal resistance by 80%.

The IRF6795MPbF balances industry leading on-state resistance while minimizing gate charge along with ultra low package inductance to reduce both conduction and switching losses. This part contains an integrated Schottky diode to reduce the Q<sub>rr</sub> of the body drain diode further reducing the losses in a Synchronous Buck circuit. The reduced losses make this product ideal for high frequency/high efficiency DC-DC converters that power high current loads such as the latest generation of microprocessors. The IRF6795MPbF has been optimized for parameters that are critical in synchronous buck converter's Sync FET sockets.

## Absolute Maximum Ratings

	Parameter	Max.	Units
V <sub>DS</sub>	Drain-to-Source Voltage	25	V
V <sub>GS</sub>	Gate-to-Source Voltage	±20	
I <sub>D</sub> @ T <sub>A</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V ③	32	
I <sub>D</sub> @ T <sub>A</sub> = 70°C	Continuous Drain Current, V <sub>GS</sub> @ 10V ③	25	A
I <sub>D</sub> @ T <sub>C</sub> = 25°C	Continuous Drain Current, V <sub>GS</sub> @ 10V ④	160	
I <sub>DM</sub>	Pulsed Drain Current ⑤	250	
E <sub>AS</sub>	Single Pulse Avalanche Energy ⑥	190	mJ
I <sub>AR</sub>	Avalanche Current ⑤	25	A

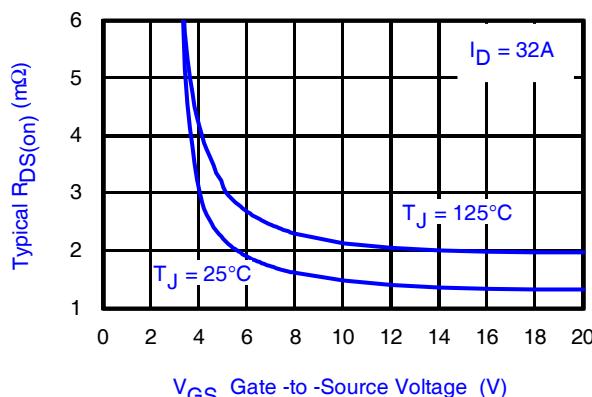


Fig 1. Typical On-Resistance vs. Gate Voltage

Notes:

- ① Click on this section to link to the appropriate technical paper.
- ② Click on this section to link to the DirectFET Website.
- ③ Surface mounted on 1 in. square Cu board, steady state.

[www.irf.com](http://www.irf.com)

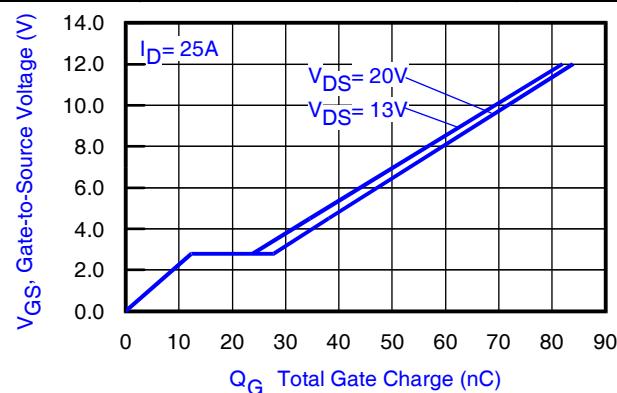


Fig 2. Typical Total Gate Charge vs. Gate-to-Source Voltage

④ T<sub>C</sub> measured with thermocouple mounted to top (Drain) of part.

⑤ Repetitive rating; pulse width limited by max. junction temperature.


⑥ Starting T<sub>J</sub> = 25°C, L = 0.60mH, R<sub>G</sub> = 25Ω, I<sub>AS</sub> = 25A.

**Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$\text{BV}_{\text{DSS}}$	Drain-to-Source Breakdown Voltage	25	—	—	V	$V_{\text{GS}} = 0\text{V}, I_D = 1.0\text{mA}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	11	—	mV/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 5\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	1.4	1.8	m $\Omega$	$V_{\text{GS}} = 10\text{V}, I_D = 32\text{A}$ ⑦
		—	2.4	3.2		$V_{\text{GS}} = 4.5\text{V}, I_D = 25\text{A}$ ⑦
$V_{\text{GS(th)}}$	Gate Threshold Voltage	1.35	1.8	2.35	V	$V_{\text{DS}} = V_{\text{GS}}, I_D = 100\mu\text{A}$
$\Delta V_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-4.2	—	mV/ $^\circ\text{C}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 10\text{mA}$
$I_{\text{DSS}}$	Drain-to-Source Leakage Current	—	—	500	$\mu\text{A}$	$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}$
		—	—	5.0	mA	$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
$I_{\text{GSS}}$	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{\text{GS}} = -20\text{V}$
$g_{\text{fs}}$	Forward Transconductance	100	—	—	S	$V_{\text{DS}} = 13\text{V}, I_D = 25\text{A}$
$Q_g$	Total Gate Charge	—	35	53	nC	$V_{\text{DS}} = 13\text{V}$ $V_{\text{GS}} = 4.5\text{V}$ $I_D = 25\text{A}$ See Fig. 15
$Q_{\text{gs}1}$	Pre-V <sub>th</sub> Gate-to-Source Charge	—	8.8	—		
$Q_{\text{gs}2}$	Post-V <sub>th</sub> Gate-to-Source Charge	—	4.8	—		
$Q_{\text{gd}}$	Gate-to-Drain Charge	—	10	—		
$Q_{\text{godr}}$	Gate Charge Overdrive	—	11	—		
$Q_{\text{sw}}$	Switch Charge ( $Q_{\text{gs}2} + Q_{\text{gd}}$ )	—	14.8	—		
$Q_{\text{oss}}$	Output Charge	—	27	—	nC	$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}$
$R_G$	Gate Resistance	—	1.3	2.2	$\Omega$	
$t_{\text{d(on)}}$	Turn-On Delay Time	—	16	—	ns	$V_{\text{DD}} = 13\text{V}, V_{\text{GS}} = 4.5\text{V}$ ⑦ $I_D = 25\text{A}$ $R_G = 1.8\Omega$ See Fig. 17
$t_r$	Rise Time	—	27	—		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	16	—		
$t_f$	Fall Time	—	11	—		
$C_{\text{iss}}$	Input Capacitance	—	4280	—	pF	$V_{\text{GS}} = 0\text{V}$ $V_{\text{DS}} = 13\text{V}$ $f = 1.0\text{MHz}$
$C_{\text{oss}}$	Output Capacitance	—	1280	—		
$C_{\text{rss}}$	Reverse Transfer Capacitance	—	550	—		

**Diode Characteristics**

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_S$	Continuous Source Current (Body Diode)	—	—	32	A	MOSFET symbol showing the integral reverse p-n junction diode.
$I_{\text{SM}}$	Pulsed Source Current (Body Diode) ⑤	—	—	250		
$V_{\text{SD}}$	Diode Forward Voltage	—	—	0.75	V	$T_J = 25^\circ\text{C}, I_S = 25\text{A}, V_{\text{GS}} = 0\text{V}$ ⑦
$t_{\text{rr}}$	Reverse Recovery Time	—	27	41	ns	$T_J = 25^\circ\text{C}, I_F = 25\text{A}$
$Q_{\text{rr}}$	Reverse Recovery Charge	—	34	51	nC	$dI/dt = 200\text{A}/\mu\text{s}$ ⑦


**Notes:**⑦ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .

## Absolute Maximum Ratings

	Parameter	Max.	Units
P <sub>D</sub> @ T <sub>A</sub> = 25°C	Power Dissipation ③	2.8	W
P <sub>D</sub> @ T <sub>A</sub> = 70°C	Power Dissipation ③	1.8	
P <sub>D</sub> @ T <sub>C</sub> = 25°C	Power Dissipation ④	75	
T <sub>P</sub>	Peak Soldering Temperature	270	°C
T <sub>J</sub>	Operating Junction and Storage Temperature Range	-40 to + 150	

## Thermal Resistance

	Parameter	Typ.	Max.	Units
R <sub>θJA</sub>	Junction-to-Ambient ③⑩	—	45	
R <sub>θJA</sub>	Junction-to-Ambient ⑨⑩	12.5	—	
R <sub>θJA</sub>	Junction-to-Ambient ⑨⑩	20	—	°C/W
R <sub>θJC</sub>	Junction-to-Case ④⑩	—	1.66	
R <sub>θJ-PCB</sub>	Junction-to-PCB Mounted	1.0	—	
	Linear Derating Factor ③	0.022		W/°C

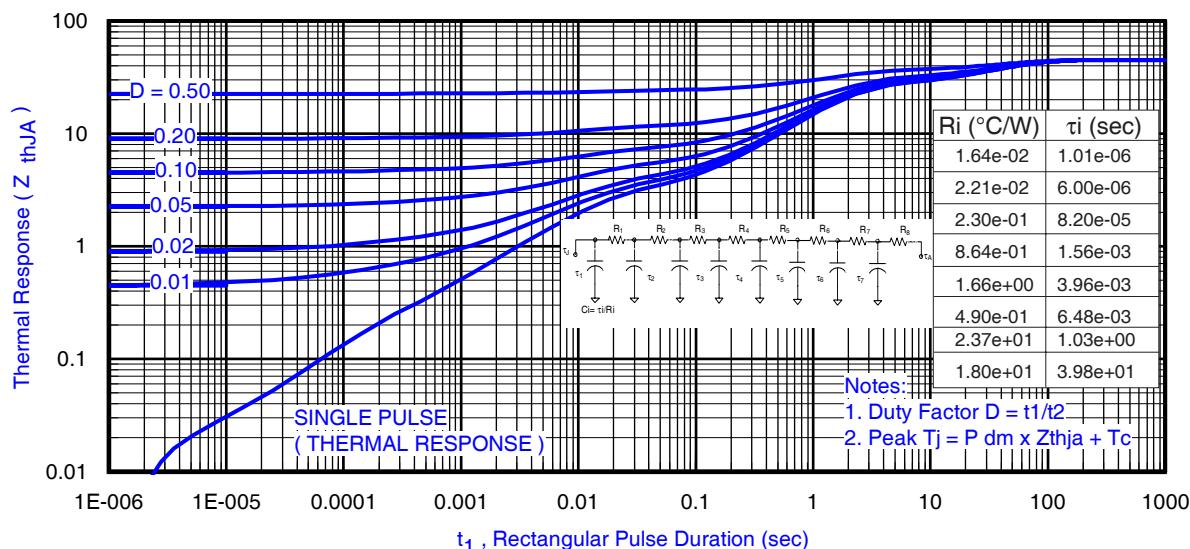


**Fig 3.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient ③  
(At lower pulse widths Zth<sub>JA</sub> & Zth<sub>JC</sub> are combined)


Notes:

⑥ Used double sided cooling , mounting pad with large heatsink. ⑩ R<sub>θ</sub> is measured at T<sub>J</sub> of approximately 90°C.


⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink.

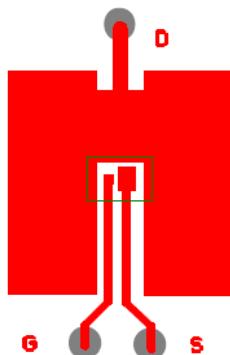

③ Surface mounted on 1 in. square Cu (still air).

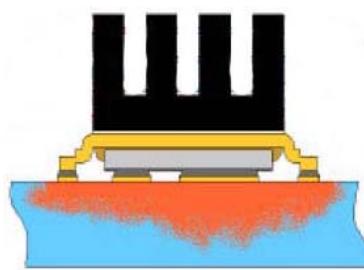


⑨ Mounted to a PCB with small clip heatsink (still air)




⑨ Mounted on minimum footprint full size board with metalized back and with small clip heatsink (still air)

# IRF6795MTRPbF


International  
Rectifier

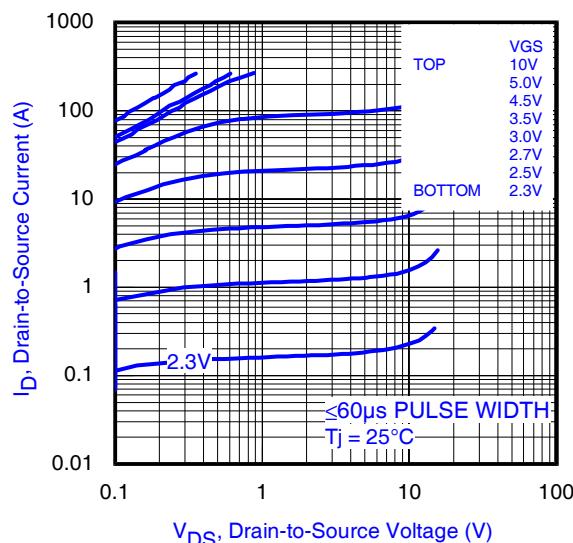


**Fig 4.** Typical Output Characteristics

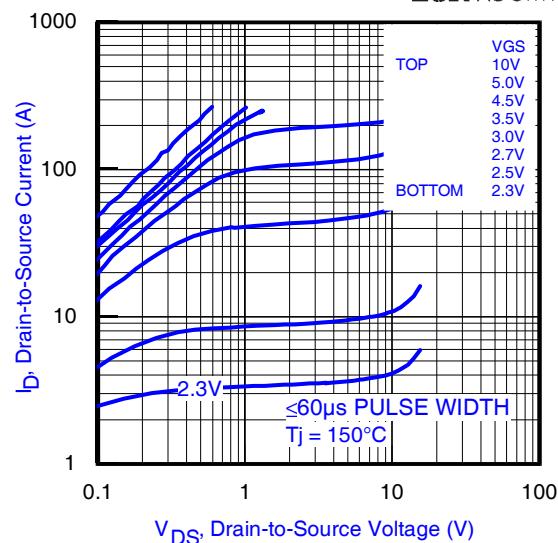


**Fig 5.** Typical Output Characteristics

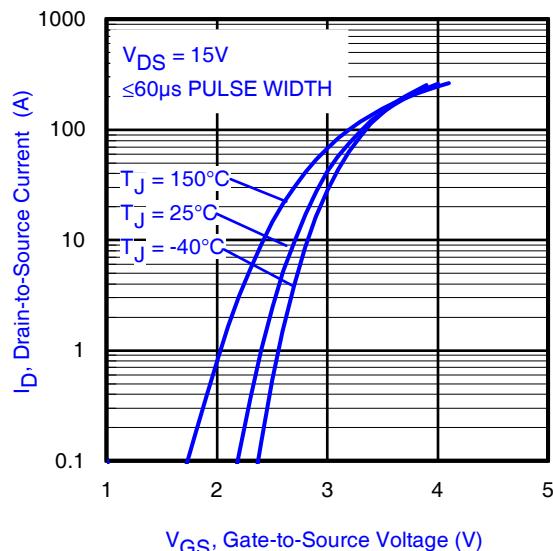


**Fig 6.** Typical Transfer Characteristics

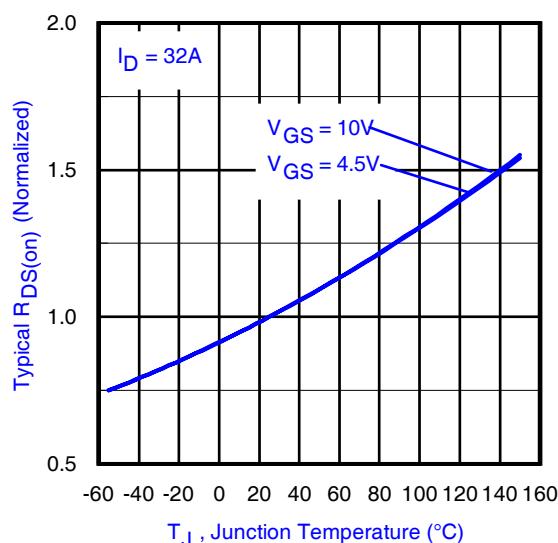

**Fig 7.** Normalized On-Resistance vs. Temperature

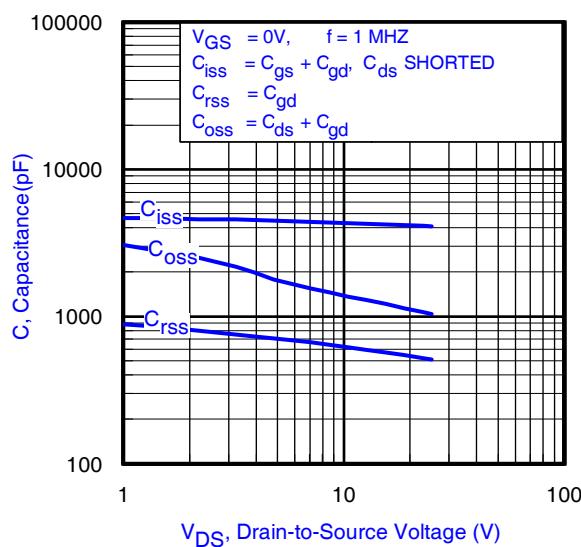

**Fig 8.** Typical Capacitance vs. Drain-to-Source Voltage

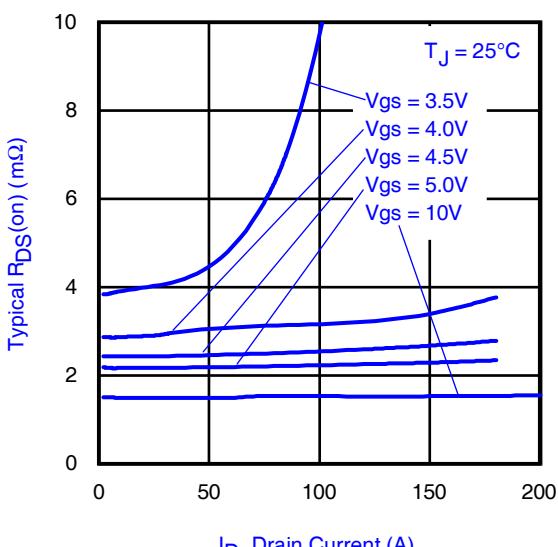

**Fig 9.** Typical On-Resistance vs. Drain Current and Gate Voltage

[www.irf.com](http://www.irf.com)

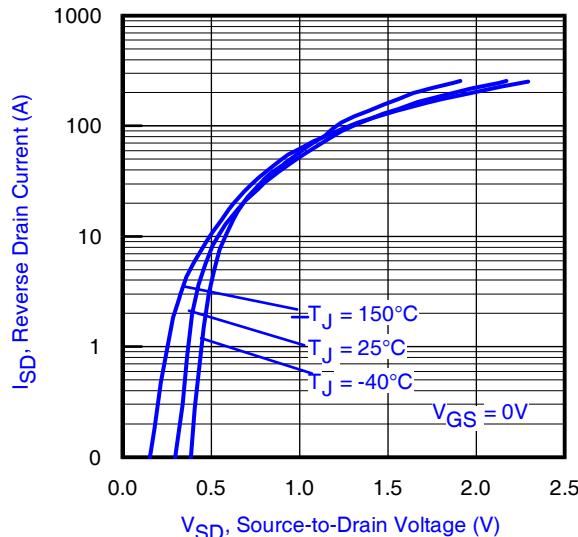


Fig 10. Typical Source-Drain Diode Forward Voltage

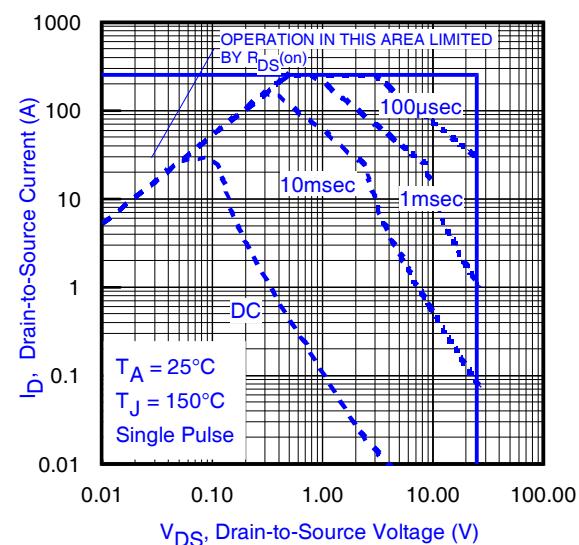


Fig 11. Maximum Safe Operating Area

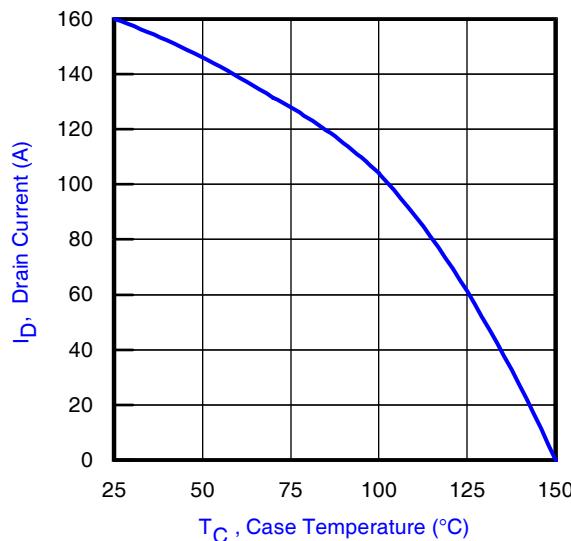


Fig 12. Maximum Drain Current vs. Case Temperature

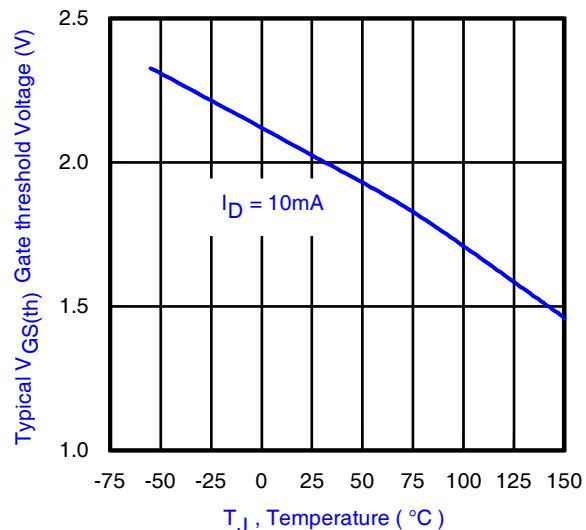


Fig 13. Typical Threshold Voltage vs. Junction Temperature



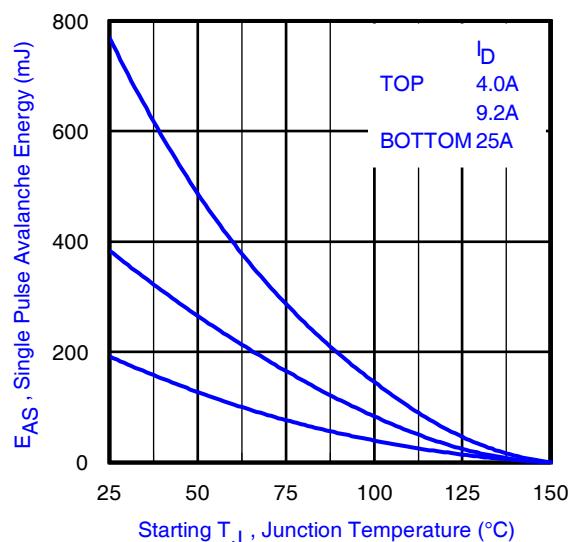



Fig 14. Maximum Avalanche Energy vs. Drain Current

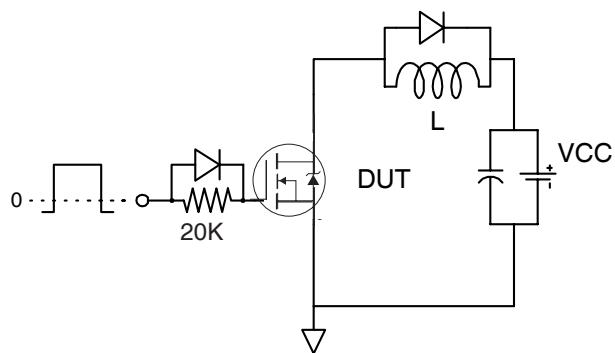


**Fig 15a.** Gate Charge Test Circuit

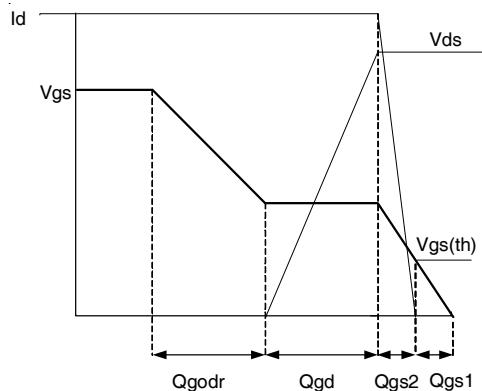


**Fig 15b.** Gate Charge Waveform

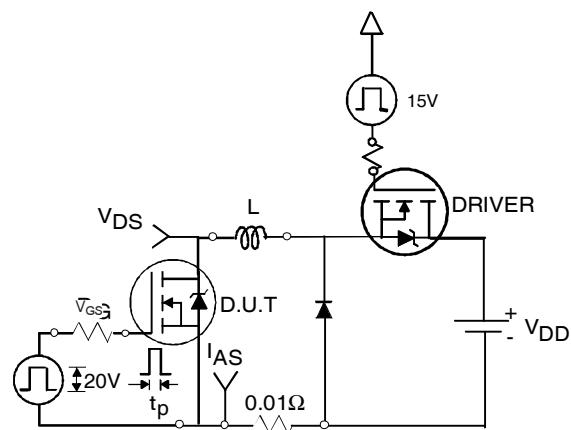


**Fig 16a.** Unclamped Inductive Test Circuit

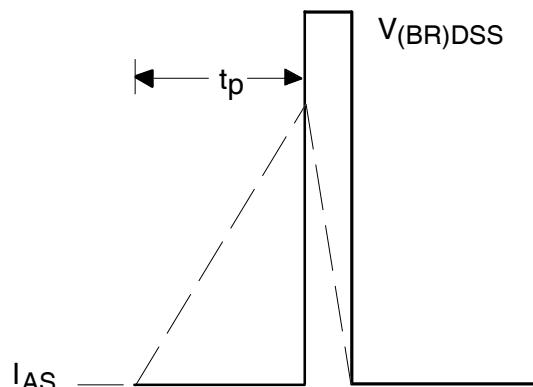


**Fig 16b.** Unclamped Inductive Waveforms

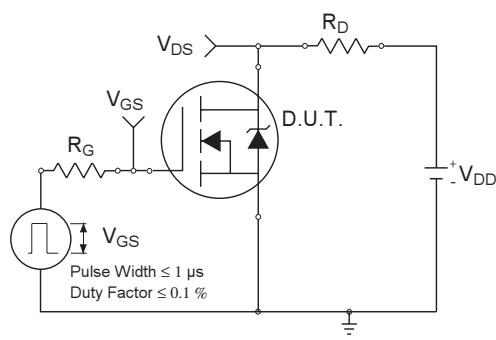

**Fig 17a.** Switching Time Test Circuit

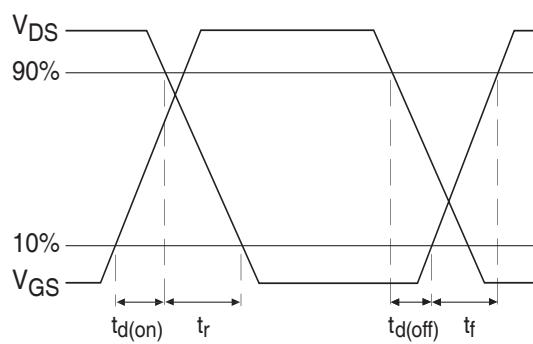

**Fig 17b.** Switching Time Waveforms

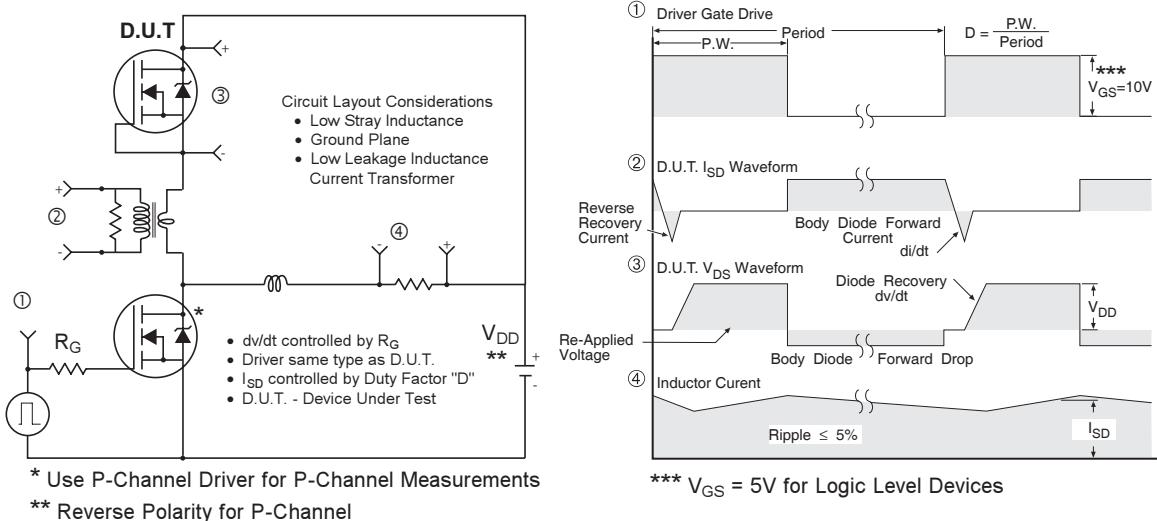


**Fig 18.** Diode Reverse Recovery Test Circuit for HEXFET® Power MOSFETs

## DirectFET™ Board Footprint, MX Outline (Medium Size Can, X-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET.

This includes all recommendations for stencil and substrate designs.

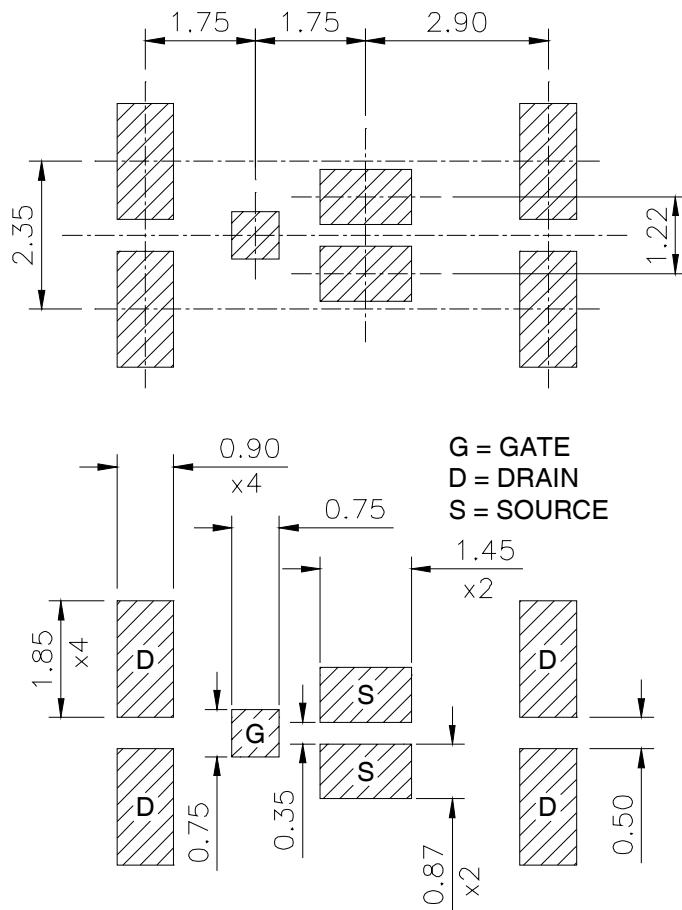


## DirectFET™ Outline Dimension, MX Outline (Medium Size Can, X-Designation).


Please see DirectFET application note AN-1035 for all details regarding the assembly of DirectFET. This includes all recommendations for stencil and substrate designs.

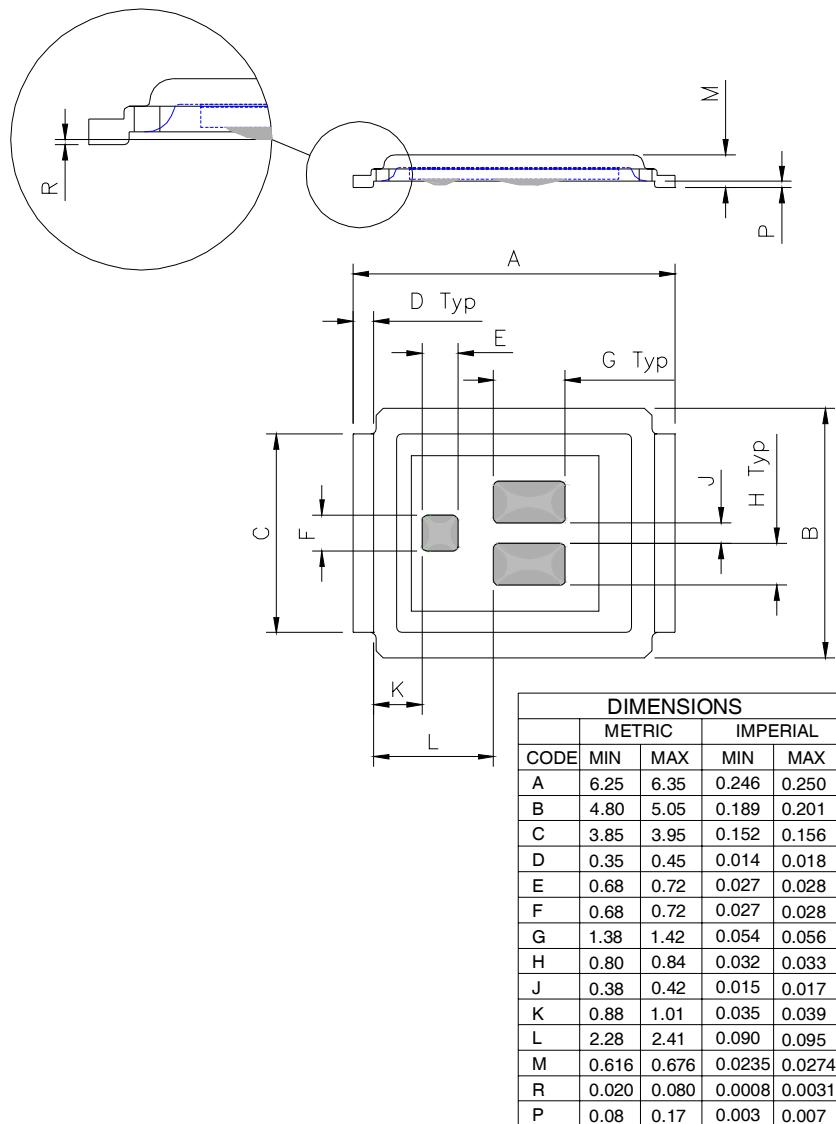

## DirectFET™ Part Marking

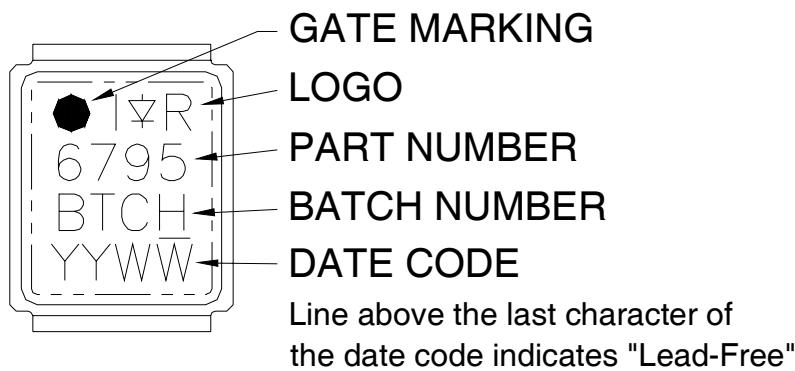



## DirectFET™ Tape & Reel Dimension (Showing component orientation).

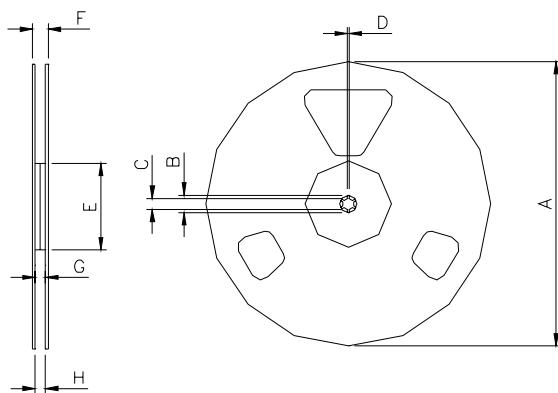

NOTE: Controlling dimensions in mm  
Std reel quantity is 4800 parts. (ordered as IRF6795MTRPBF). For 1000 parts on 7" reel, order IRF6795MTR1PBF

REEL DIMENSIONS								
STANDARD OPTION (QTY 4800)				TR1 OPTION (QTY 1000)				
	METRIC	IMPERIAL		METRIC	IMPERIAL	METRIC	IMPERIAL	
CODE	MIN	MAX	MIN	MIN	MAX	MIN	MAX	
A	330.0	N.C.	12.992	N.C.	177.77	N.C.	6.9	N.C.
B	20.2	N.C.	0.795	N.C.	19.06	N.C.	0.75	N.C.
C	12.8	13.2	0.504	0.520	13.5	12.8	0.53	0.50
D	1.5	N.C.	0.059	N.C.	1.5	N.C.	0.059	N.C.
E	100.0	N.C.	3.937	N.C.	58.72	N.C.	2.31	N.C.
F	N.C.	18.4	N.C.	0.724	N.C.	13.50	N.C.	0.53
G	12.4	14.4	0.488	0.567	11.9	12.01	0.47	N.C.
H	11.9	15.4	0.469	0.606	11.9	12.01	0.47	N.C.

### LOADED TAPE FEED DIRECTION

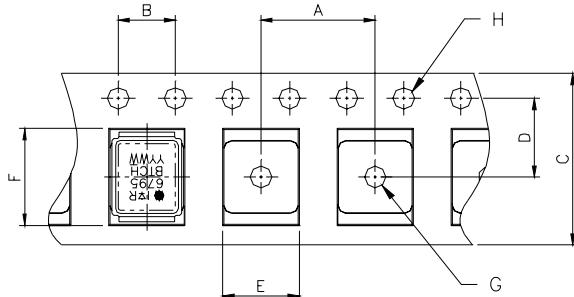

NOTE: CONTROLLING  
DIMENSIONS IN MM

DIMENSIONS				
	METRIC		IMPERIAL	
CODE	MIN	MAX	MIN	MAX
A	7.90	8.10	0.311	0.319
B	3.90	4.10	0.154	0.161
C	11.90	12.30	0.469	0.484
D	5.45	5.55	0.215	0.219
E	5.10	5.30	0.201	0.209
F	6.50	6.70	0.256	0.264
G	1.50	N.C.	0.059	N.C.
H	1.50	1.60	0.059	0.063

Data and specifications subject to change without notice.  
This product has been designed and qualified for the Consumer market.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7903  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information.02/2010

## **IMPORTANT NOTICE**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on the product, technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

## **WARNINGS**

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.