

### 5N Type Side-operational Light Touch Switches

Type: **EVQPF**



#### ■ Features


- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

**! To Be Discontinued**  
Last time buy: December 31, 2020

#### ■ Recommended Applications

- Operating switches for other electronic equipment

#### ■ Explanation of Part Numbers

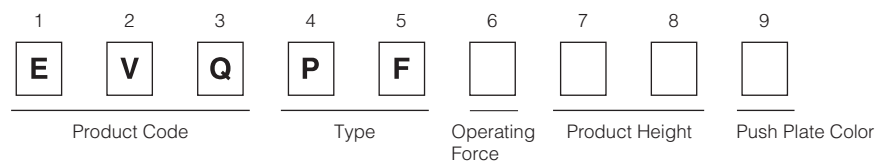

#### ■ Specifications

Type		Snap action/Push-on type SPST	
Electrical	Circuit Diagram		
	Rating	10 $\mu$ A 2 V DC to 20 mA 15 V DC (Resistive load)	
	Contact Resistance	50 m $\Omega$ max.	
	Insulation Resistance	50 M $\Omega$ min. (at 100 V DC)	
	Dielectric Withstanding Voltage	250 V AC for 1 minute	
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
	Operating Force	1.0 N $\pm$ 0.4 N 1.3 N $\pm$ 0.4 N 1.6 N $\pm$ 0.5 N	2.6 N $\pm$ 0.6 N
	Travel	0.25 mm $\pm$ 0.10 mm	
Endurance	Operating Life	100,000 cycles min.*	50,000 cycles min.
Operating Temperature		-20 $^{\circ}$ C to +70 $^{\circ}$ C	
Storage Temperature		-40 $^{\circ}$ C to +85 $^{\circ}$ C (Bulk)	
Minimum Quantity/Packing Unit		500 pcs. Polyethylene Bag (Bulk)	
Quantity/Carton		10,000 pcs.	

\*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVQPF	<p>General dimension tolerance : ± 0.3 ( ) dimensions are reference dimensions.</p> <div style="border: 1px solid red; padding: 5px; display: inline-block;"> <b>To Be Discontinued</b> Last time buy: December 31, 2020         </div>			
	<div style="display: flex; justify-content: space-around;"> <div data-bbox="510 414 758 761"> </div> <div data-bbox="837 425 1109 750"> </div> <div data-bbox="1189 459 1380 694"> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div data-bbox="526 851 805 1030"> <p>PWB mounting hole for reference (PWB thickness=1.6 mm) View from mounting side</p> </div> <div data-bbox="901 896 1029 1086"> <p>Circuit diagram</p> </div> </div>			
Part Numbers	Operating Force	ℓ=Push Plate Place	Push Plate Color	Operating Life
EVQPF003M	1.0 N	3.15 mm	White	100,000 cycles
EVQPF004R	1.0 N	3.85 mm	Red	100,000 cycles
EVQPF006K	1.0 N	5.85 mm	Black	100,000 cycles
EVQPF008K	1.0 N	8.35 mm	Black	100,000 cycles
EVQPF103M	1.3 N	3.15 mm	White	100,000 cycles
EVQPF104R	1.3 N	3.85 mm	Red	100,000 cycles
EVQPF106K	1.3 N	5.85 mm	Black	100,000 cycles
EVQPF108K	1.3 N	8.35 mm	Black	100,000 cycles
EVQPF203M	1.6 N	3.15 mm	White	100,000 cycles
EVQPF204R	1.6 N	3.85 mm	Red	100,000 cycles
EVQPF206K	1.6 N	5.85 mm	Black	100,000 cycles
EVQPF208K	1.6 N	8.35 mm	Black	100,000 cycles
EVQPF303M	2.6 N	3.15 mm	White	50,000 cycles
EVQPF304R	2.6 N	3.85 mm	Red	50,000 cycles
EVQPF306K	2.6 N	5.85 mm	Black	50,000 cycles
EVQPF308K	2.6 N	8.35 mm	Black	50,000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.  
Should a safety concern arise regarding this product, please be sure to contact us immediately.