## SMD / SMT Inductors (Coils) RLF7045T-100M1R9-D

ns in mr

Applications	Automotive Grade
Feature	AEC-Q200 AEC-Q200
	Wire Wound Wire Wound
	Shield Magnetic Shield
	Ferrite Core
Series   Type	RLF-D
	Production (Not Recommended for New Design)
Status	Recommended Alternate Part No. : <u>CLF7045T-100M-D</u> (Interchangeability is not
	guaranteed.)
Brand	ток


	Size
Length(L)	7.30mm ±0.30mm
Width(W)	6.80mm ±0.20mm
Thickness   Height	4.60mm ±0.20mm
Recommended Land Pattern (A)	2.00mm Nom.
Recommended Land Pattern (B)	3.90mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.

Electrical Characteristics				
Inductance	10µH ±20% at 100kHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	2.6A (30% Down)			
Rated Current (Temperature Rise) [Typ.]	1.9A (20°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	50mΩ			
DC Resistance [Max.]	60mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 150°C		
Coldering Method	Reflow		
Soldering Method	Iron Soldering		
AEC-Q200	YES		
Packing	Embossed (Plastic)Taping [330mm Reel]		
Package Quantity	1000pcs		
I Images are for reference only and show exemplary products. WEIGPBF document was created based on the data listed on the TDK Corporation website I All specifications are subject to change without notice.	<sub>e.</sub> 0.8g		

Copyright(c) TDK Corporation. All rights reserved. Downloaded from <u>Arrow.com.</u>

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

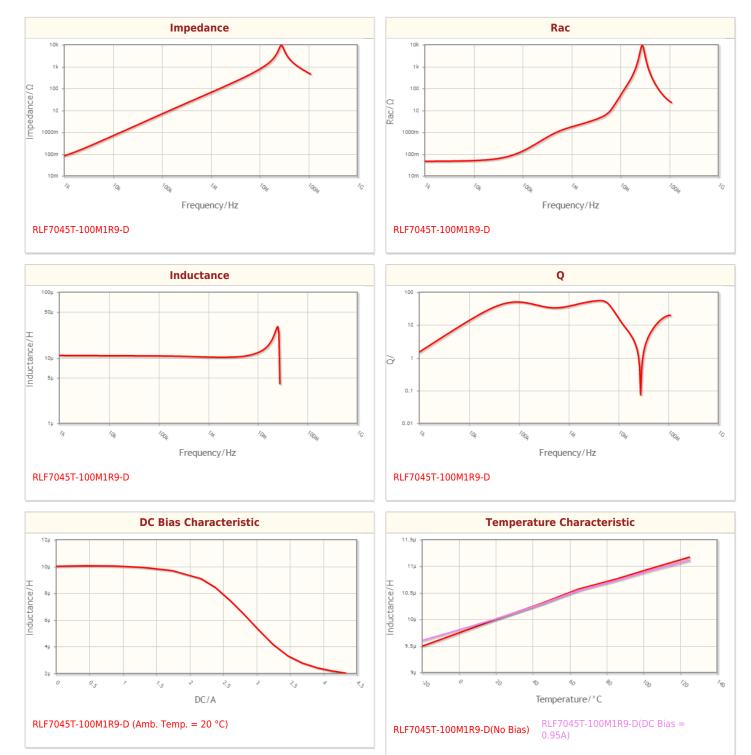


 $!\ \mbox{Images}$  are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

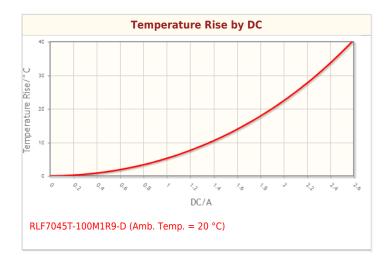

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.