


Features

- 10 kA, 8/20 μ s surge capability
- Low clamping voltage under surge
- Bidirectional TVS
- UL Recognized 



These models are obsolete and not recommended for new designs. Model PTVS10-058C-TH and PTVS10-076C-TH are possible alternatives.

Applications

- AC line protection
- High power DC bus protection

PTVS10-xxxC Series High Current TVS Diodes

General Information

The PTVS10-xxxC range of high current bidirectional TVS diodes is designed for use in AC line protection and high power DC bus clamping applications. These devices offer bidirectional port protection from 58 volts to 470 volts.

The devices are RoHS* and UL compliant while also meeting IEC 61000-4-5 8/20 μ s current surge requirements.



Agency Approval

Description	
UL	File Number: E313168

Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive Standoff Voltage	V_{WM}	PTVS10-058C	58
		PTVS10-076C	76
		PTVS10-170C	170
		PTVS10-320C	320
		PTVS10-380C	380
		PTVS10-470C	470
Peak Current Rating per 8/20 μ s IEC 61000-4-5	I_{PPM}	10	kA
Operating Junction Temperature Range	T_J	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	T_S	-55 to +150	$^\circ\text{C}$
Lead Temperature, Soldering (10 s)		260	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_D Standby Current	$V_D = V_{WM}$			10	μA
$V_{(BR)}$ Breakdown Voltage	$I_{BR} = 10\text{ mA}$	PTVS10-058C	64	66	70
		PTVS10-076C	85	92	95
		PTVS10-170C	190	200	210
		PTVS10-320C	336	350	368
		PTVS10-380C	401	420	443
		PTVS10-470C	490	500	530
V_C Clamping Voltage	$I_{PP} = 10\text{ kA}$	PTVS10-058C		120	130
		PTVS10-076C		150	160
		PTVS10-170C		250	300
		PTVS10-320C		440	500
		PTVS10-380C		520	570
		PTVS10-470C		620	680
$V_{(BR)}$ Temperature Coefficient			0.1		$\%/^\circ\text{C}$
C Capacitance	F = 10 kHz, $V_d = 1\text{ Vrms}$	PTVS10-058C		11.7	12.5
		PTVS10-076C		8.6	10.0
		PTVS10-170C		4.0	5.0
		PTVS10-320C		2.7	3.5
		PTVS10-380C		2.0	2.5
		PTVS10-470C		1.7	2.2

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes

BOURNS®


Product Dimensions

The product is epoxy encapsulated per UL Class 94V-0 with Ag plated leads solderable per MIL-STD-750, Method 2026. The package dimensions and part marking are shown below.

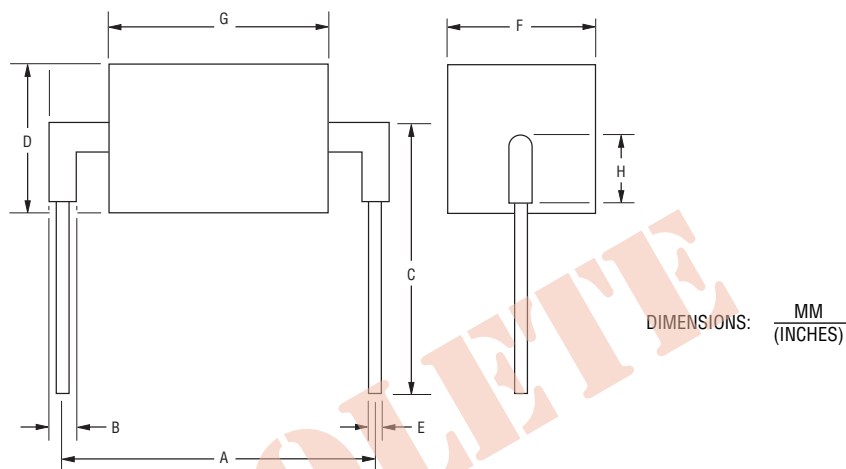

Dim.	PTVS10-058C	PTVS10-076C	PTVS10-170C	PTVS10-320C	PTVS10-380C	PTVS10-470C
A	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$	$\frac{24.15 \pm 0.72}{(0.950 \pm 0.028)}$
B	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.	$\frac{2.40}{(0.094)}$ Typ.
C	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.	$\frac{15.0}{(0.59)}$ Min.
D	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.
E	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$	$\frac{1.25 \pm 0.05}{(0.049 \pm 0.002)}$
F	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.	$\frac{16.0}{(0.63)}$ Max.
G	$\frac{5.0}{(0.20)}$ Max.	$\frac{6.0}{(0.24)}$ Max.	$\frac{13.0}{(0.51)}$ Max.	$\frac{19.0}{(0.75)}$ Max.	$\frac{19.0}{(0.75)}$ Max.	$\frac{21.0}{(0.83)}$ Max.
H	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.	$\frac{8.0}{(0.32)}$ Max.

How to Order

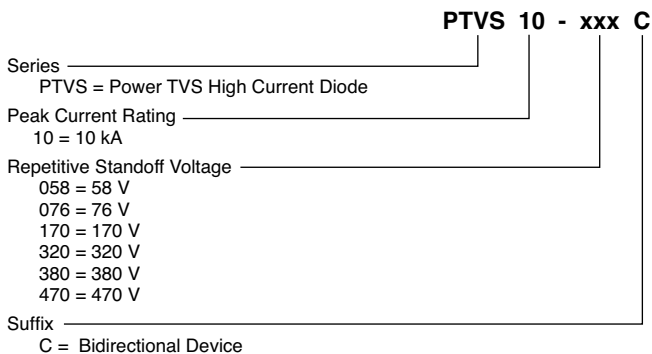

Typical Part Marking

PTVS10-058C	10058
PTVS10-076C	10076
PTVS10-170C	10170
PTVS10-320C	10320
PTVS10-380C	10380
PTVS10-470C	10470


Specifications are subject to change without notice. The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes


BOURNS®

Performance Graphs


V-I Characteristic

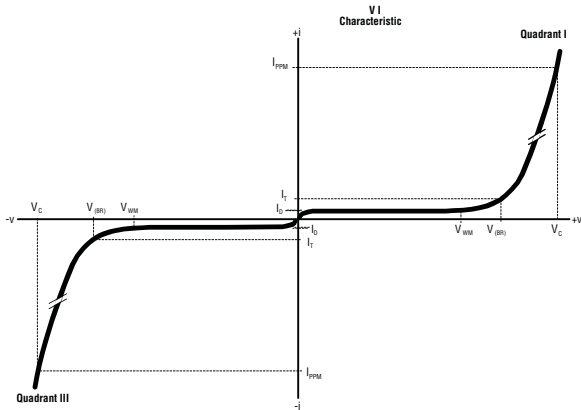

Typical V_{BR} vs. Junction Temperature

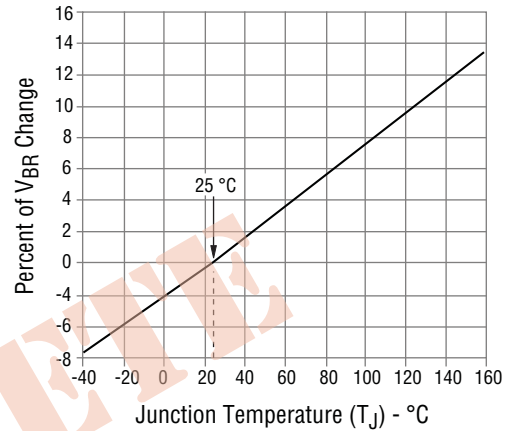


Typical Peak Power Derating

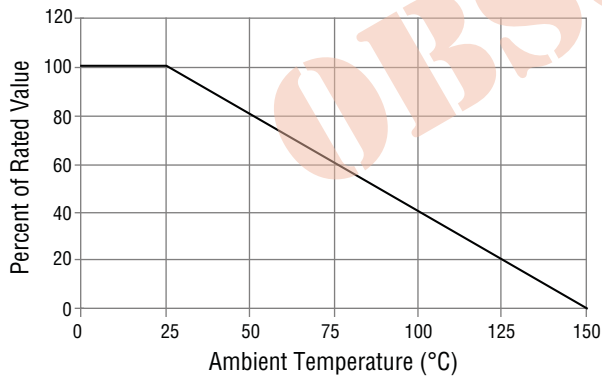

Application

A typical application for Power TVS products includes AC power line primary protection.

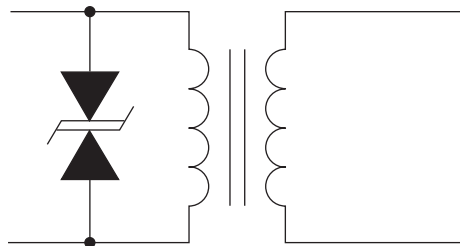

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PTVS10-xxxC Series High Current TVS Diodes


BOURNS®

Performance Graphs (Continued)


Surge Response - PTVS10-320C

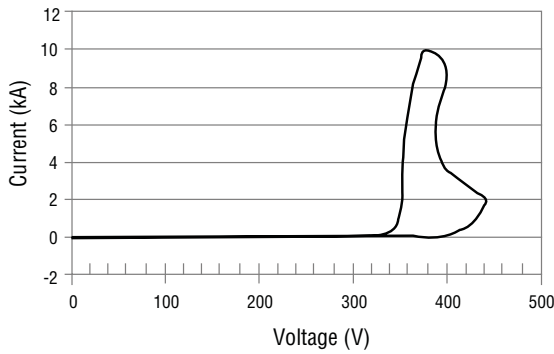


Surge Response (1.2/50, 8/20 Surge) - PTVS10-320C

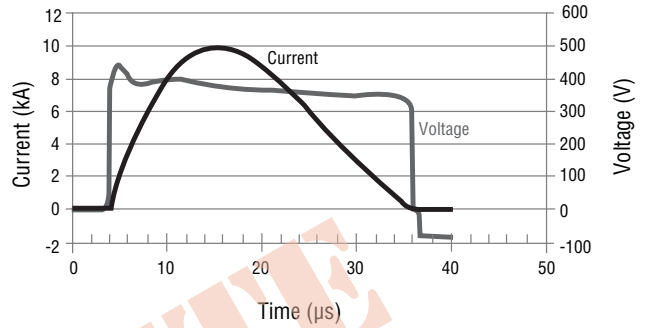


Surge Response - PTVS10-380C

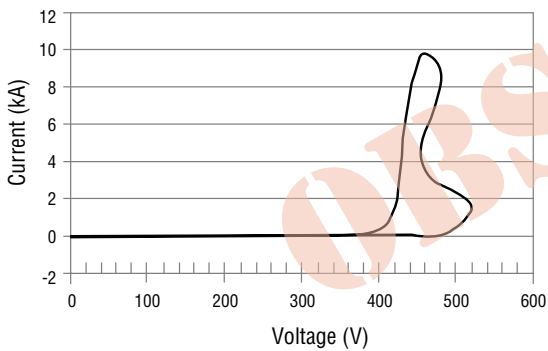


Surge Response (1.2/50, 8/20 Surge) - PTVS10-380C

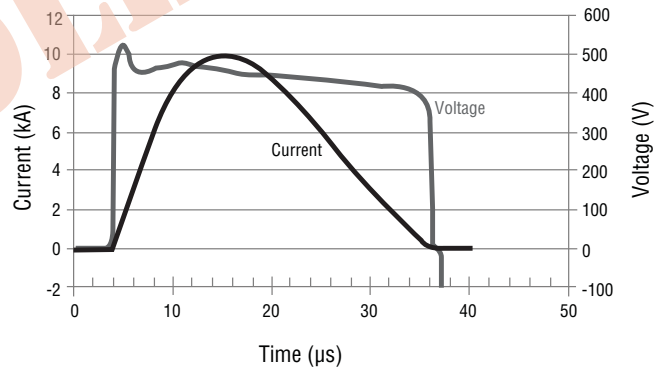

Surge Response - PTVS10-470C

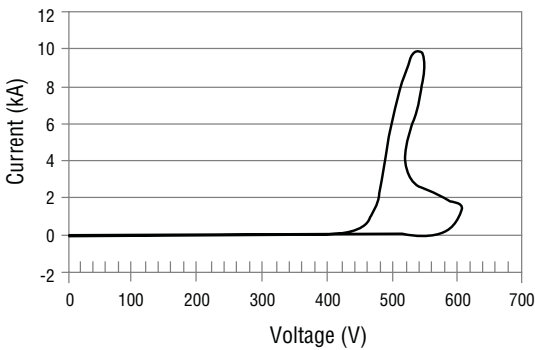

Surge Response (1.2/50, 8/20 Surge) - PTVS10-470C

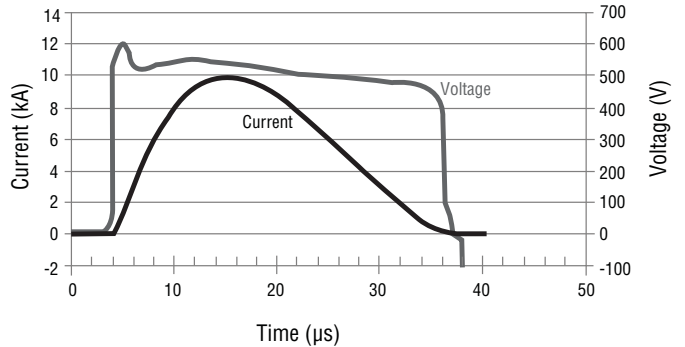

REV. 01/15

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.