

Note: This datasheet may be out of date. Please download the latest datasheet of LQM2MPN1R5MEH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQM2MPN1R5MEH%23

#### "#" indicates a package specification code.

This component has greater current saturation characteristic than existing LQM2MP series and height is 0. 8mm max.



< List of part numbers with package codes > LQM2MPN1R5MEHB LQM2MPN1R5MEHL

Appearance & Shape

LQM2MPN1R5MEH#



# 0.5±0.2

2.0±0.2

(in mm)

1.6±0.2

0.7±0.1

References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	1000
L	180Embossed Tape	3000

Mass (typ.)	
1 piece	0.01g



### Notices

When rated current is applied to the products, inductance will be within  $\pm 30\%$  of initial inductance value range. When rated current is applied to the products, the temperature rise caused by selfgenerated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus selfgeneration of heat) under 125°C.

1 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





## LQM2MPN1R5MEH#

Note: This datasheet may be out of date. Please download the latest datasheet of LQM2MPN1R5MEH# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQM2MPN1R5MEH%23

"#" indicates a package specification code.



## Specifications

L size	2.0±0.2mm
W size	1.6±0.2mm
T size	0.7±0.1mm
Size code inch (mm)	0806 (2016)
Inductance	1.5µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	0.75A(Max) / 0.9A(Typ.)
Rated current (Itemp) (Based on Temperature rise)	1.6A(Max) / 2.1A(Typ.)
Max. of DC resistance	0.113Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	40MHz
Brand	Murata
DC Resistance Intermediate Values	0.09Ω(typ.)
Operating Temperature Range	-40°C to 85°C
Series	LQM2MPN_EH

2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet

Please download the latest datasheet of LQM2MPN1R5MEH# from the official website of Murata Manufacturing Co., Ltd. http://www.murata.com/en-us/products/productdetail?partno=LQM2MPN1R5MEH%23


Note: This datasheet may be out of date.


"#" indicates a package specification code.




## **Characteristic Data**

LQM2MPN1R5MEH#

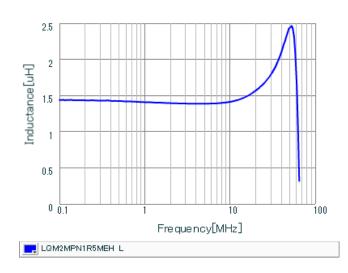

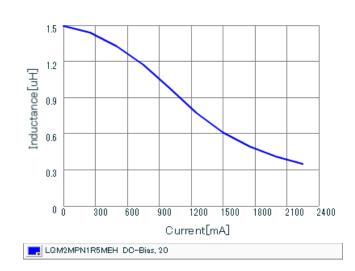

#### Inductance - Frequency Characteristics

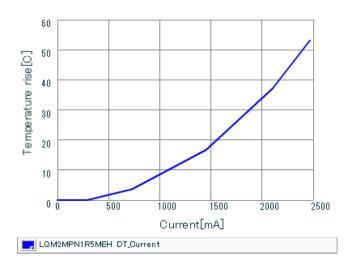

**Temperature Increase Characteristic** 

#### Impedance - Current Characteristics

3 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

URL : https://www.murata.com/ muKata Downloaded from Arrow.com.