## SMD / SMT Inductors (Coils) VLF4014ST-2R2M1R9

Applications	Commercial Grade	
	Wire Wound	
Feature	Shield Magnetic Shield	
	Ferrite Core	W
Series   Type	VLF	
Status	▲ Obsolete	100 0
	Recommended Alternate Part No. : <u>VLS4012CX-2R2M-1</u> (Interchangeability is not	
	guaranteed.)	
	Discontinue Issue Date : May.18, 2017	
	Last Purchase Order Date : Mar.29, 2019	
	Last Shipment Date : Sep.30, 2019	
Brand	тдк	

Size		
Length(L)	3.80mm Nom.	
Width(W)	3.60mm Nom.	
Thickness   Height	1.40mm Max.	
Recommended Land Pattern (A)	0.90mm Nom.	
Recommended Land Pattern (B)	2.90mm Nom.	
Recommended Land Pattern (C)	1.30mm Nom.	

Electrical Characteristics				
Inductance	2.2µH ±20% at 1MHz			
Rated Current (L Change) [Typ.]				
Rated Current (L Change) [Max.]	2A (30% Down)			
Rated Current (Temperature Rise) [Typ.]	1.9A (40°C Rise)			
Rated Current (Temperature Rise) [Max.]				
DC Resistance [Typ.]	60mΩ			
DC Resistance [Max.]	72mΩ			
Self Resonant Frequency [Min.]				
Self Resonant Frequency [Typ.]				
Q [Min.]				
Q [Typ.]				

Other			
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105°C		
Soldering Method	Reflow		
AEC-Q200	NO		
Packing	Embossed (Plastic)Taping [180mm Reel]		
Umages are for reference only and show exemplary products. Package Quantity I This PDF document was created based on the data listed on the TDK Corporation websit	1000pcs		
Weight specifications are subject to change without notice.	0.05g		

Copyright(c) TDK Corporation. All rights reserved. Downloaded from Arrow.com.

ZG

°0,

1004

ζ<sub>G</sub>


'an


20

Iq.

Iq.

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

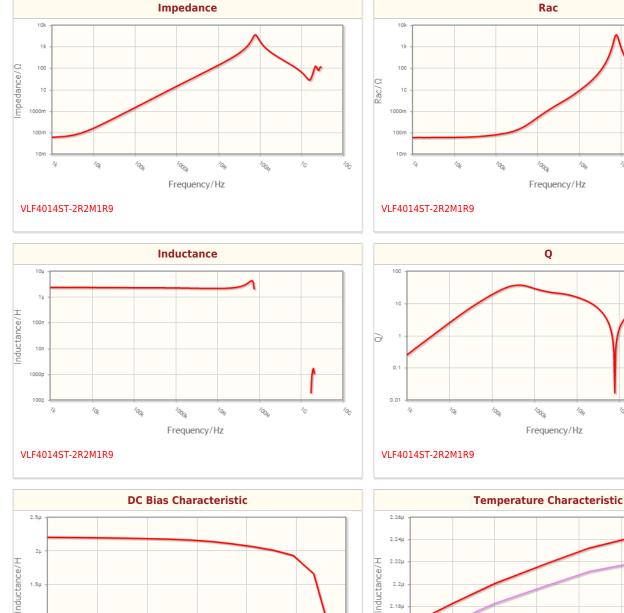

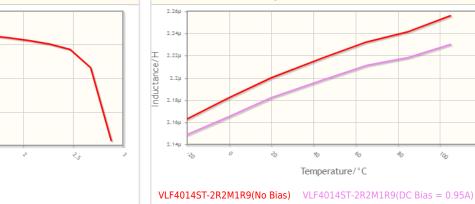

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

7.0

DC/A

! All specifications are subject to change without notice.

0.


VLF4014ST-2R2M1R9 (Amb. Temp. = 20 °C)

1.5µ

10

500r

Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

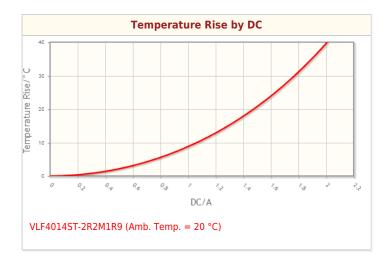


! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

! All specifications are subject to change without notice.

RoHS Reach Halogen Free Pb Free

## Associated Images

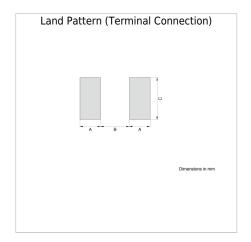

! Images are for reference only and show exemplary products.

! This PDF document was created based on the data listed on the TDK Corporation website.

 $! \ \mbox{All specifications} \ \mbox{are subject to change without notice}.$