RoHS Reach Pb Free

Applications	Automotive Grade
Feature	AEC-Q200 AEC-Q200 Wire Wound Wire Wound Shield Magnetic Shield Ferrite Core
Series   Type	CLF-D
Status	Production
Brand	TDK



	Size
Length(L)	10.00mm ±0.30mm
Width(W)	9.70mm ±0.30mm
Thickness   Height	3.80mm ±0.30mm
Recommended Land Pattern (A)	2.50mm Nom.
Recommended Land Pattern (B)	5.60mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.

Electrical Characteristics			
Inductance	470μH ±20% at 100kHz		
Rated Current (L Change) [Typ.]	560mA (10% Down)		
Rated Current (L Change) [Max.]			
Rated Current (Temperature Rise) [Typ.]	440mA (30°C Rise)		
Rated Current (Temperature Rise) [Max.]			
DC Resistance [Typ.]	1.21Ω		
DC Resistance [Max.]	1.452Ω		
Self Resonant Frequency [Min.]			
Self Resonant Frequency [Typ.]			
Q [Min.]			
Q [Typ.]			


Other		
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 150°C	
Coldoring Mathod	Reflow	
Soldering Method	Iron Soldering	
AEC-Q200	YES	
Packing	Punched (Paper)Taping [330mm Reel]	
Package Quantity	800pcs	
Weight	1.3g	


<sup>!</sup> Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.


<sup>!</sup> All specifications are subject to change without notice.





## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

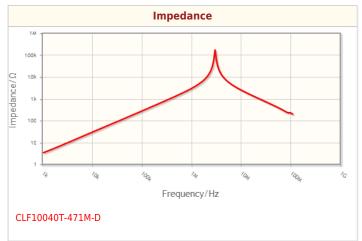


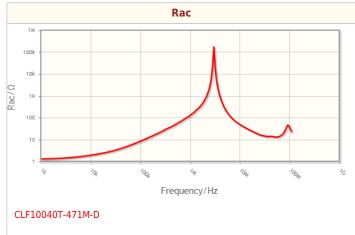

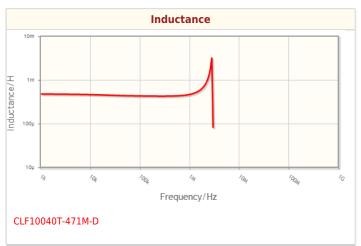

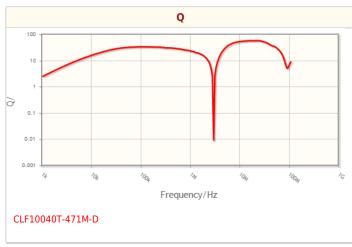

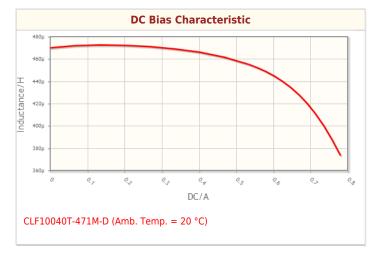

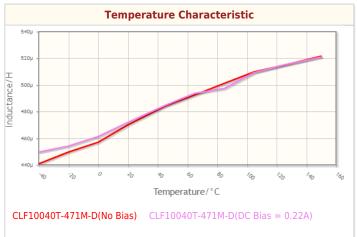


<sup>!</sup> Images are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.

RoHS Reach Pb Free

## Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

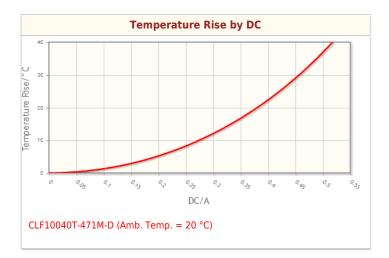

<sup>!</sup> Images are for reference only and show exemplary products.


<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.


<sup>!</sup> All specifications are subject to change without notice.



RoHS Reach Pb Free

## **Associated Images**





 $<sup>!\ \</sup>mbox{Images}$  are for reference only and show exemplary products.

<sup>!</sup> This PDF document was created based on the data listed on the TDK Corporation website.

<sup>!</sup> All specifications are subject to change without notice.