

Product Search Data Sheet

BLM21AG121SH1#

In Production AEC-Q200 RoHS REACH


< List of part numbers with package codes > BLM21AG121SH1B BLM21AG121SH1D BLM21A


BLM21AG121SH1J



## Appearance & Shape







Automotive Usage

Powertrain/Safety

Note: This datasheet may be out of date. Please download the latest datasheet of BLM21AG121SH1# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=BLM21AG121SH1%23

### "#" indicates a package specification code.



## Packaging Information

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	1000
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000



## Features

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.

BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM\_Aseries generates an impedance from the relatively low frequencies. Therefore BLM\_Aseries is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz).

1 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





# BLM21AG121SH1#

Note: This datasheet may be out of date. Please download the latest datasheet of BLM21AG121SH1# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=BLM21AG121SH1%23

### "#" indicates a package specification code.



# Specifications

Shape	SMD
Size Code (in inch)	0805
Length	2.0mm
Length Tolerance	±0.2mm
Width	1.25mm
Width Tolerance	±0.2mm
Thickness	0.85mm
Thickness Tolerance	±0.2mm
Operating Temperature Range	-55°C to 125°C
Mass(typ.)	0.01g
Number of Circuit	1
Rated Current (at 85°C)	1A
Rated Current (at 125°C)	1A
DC Resistance(max.)	0.09Ω
Impedance (at 100MHz)	120Ω
Impedance (at 100MHz) Tolerance	±25%
Size Code (in mm)	2012

2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet


# BLM21AG121SH1#


**Product Data** 

Note: This datasheet may be out of date. Please download the latest datasheet of BLM21AG121SH1# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=BLM21AG121SH1%23

"#" indicates a package specification code.

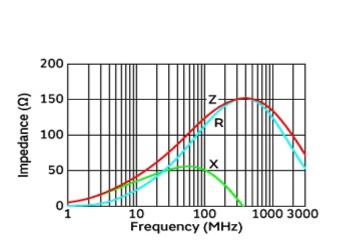

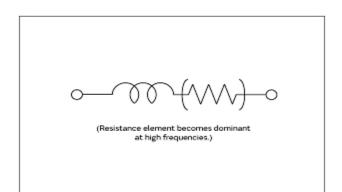

Impedance-Frequency Characteristics

**Equivalent Circuit** 

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



3 of 3